


SAMSUNG

TFT-LCD MONITOR

ES15A*/ES17A*

***SERVICE* Manual**

TFT-LCD MONITOR

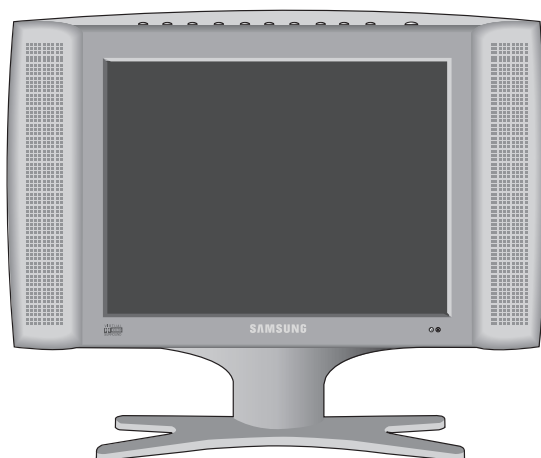

CONTENTS

1. Precautions
2. Product Specifications
3. Disassembly & Reassembly
4. Alignment & Adjustments
5. Troubleshooting
6. Exploded View & Parts List
7. Electrical Parts List
8. Block Diagram
9. Wiring Diagram
10. Schematic Diagrams
11. Panel Description

1 Precautions

Follow these safety, servicing and ESD precautions to prevent damage and to protect against potential hazards such as electrical shock.

1-1 Safety Precautions

1-1-1 Warnings

1. For continued safety, do not attempt to modify the circuit board.
2. Disconnect the AC power and DC Power Jack before servicing.

1-1-2 Servicing the LCD Monitor

1. When servicing the LCD Monitor Disconnect the AC line cord from the AC outlet.
2. It is essential that service technicians have an accurate voltage meter available at all times. Check the calibration of this meter periodically.

1-1-3 Fire and Shock Hazard

Before returning the monitor to the user, perform the following safety checks:

1. Inspect each lead dress to make certain that the leads are not pinched or that hardware is not lodged between the chassis and other metal parts in the monitor.
2. Inspect all protective devices such as nonmetallic control knobs, insulating materials, cabinet backs, adjustment and compartment covers or shields, isolation resistor-capacitor networks, mechanical insulators, etc.
3. Leakage Current Hot Check (Figure 1-1):

WARNING: Do not use an isolation transformer during this test.

Use a leakage current tester or a metering system that complies with American National Standards Institute (ANSI C101.1, *Leakage Current for Appliances*), and Underwriters Laboratories (UL Publication UL1410, 59.7).

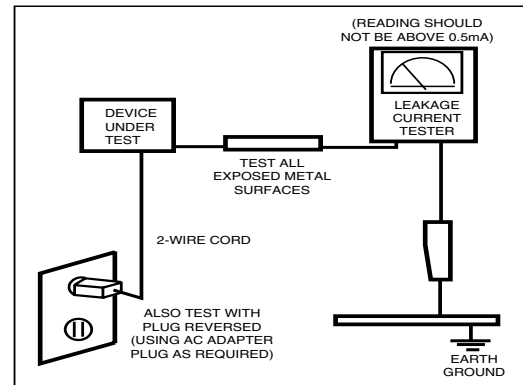


Figure 1-1. Leakage Current Test Circuit

4. With the unit completely reassembled, plug the AC line cord directly into a 120V AC outlet. With the unit's AC switch first in the ON position and then OFF, measure the current between a known earth ground (metal water pipe, conduit, etc.) and all exposed metal parts, including: metal cabinets, screwheads and control shafts. The current measured should not exceed 0.5 milliamp. Reverse the power-plug prongs in the AC outlet and repeat the test.

1-1-4 Product Safety Notices

Some electrical and mechanical parts have special safety-related characteristics which are often not evident from visual inspection. The protection they give may not be obtained by replacing them with components rated for higher voltage, wattage, etc. Parts that have special safety characteristics are identified by ⚠ on schematics and parts lists. A substitute replacement that does not have the same safety characteristics as the recommended replacement part might create shock, fire and / or other hazards. Product safety is under review continuously and new instructions are issued whenever appropriate.

1-2 Servicing Precautions

WARNING: An electrolytic capacitor installed with the wrong polarity might explode.

Caution: Before servicing units covered by this service manual, read and follow the Safety Precautions section of this manual.

Note: If unforeseen circumstances create conflict between the following servicing precautions and any of the safety precautions, always follow the safety precautions.

1-2-1 General Servicing Precautions

1. Always unplug the unit's AC power cord from the AC power source and disconnect the DC Power Jack before attempting to:
 - (a) remove or reinstall any component or assembly,
 - (b) disconnect PCB plugs or connectors, (c) connect a test component in parallel with an electrolytic capacitor.
2. Some components are raised above the printed circuit board for safety. An insulation tube or tape is sometimes used. The internal wiring is sometimes clamped to prevent contact with thermally hot components. Reinstall all such elements to their original position.
3. After servicing, always check that the screws, components and wiring have been correctly reinstalled. Make sure that the area around the serviced part has not been damaged.
4. Check the insulation between the blades of the AC plug and accessible conductive parts (examples: metal panels, input terminals and earphone jacks).
5. Insulation Checking Procedure: Disconnect the power cord from the AC source and turn the power switch ON. Connect an insulation resistance meter (500 V) to the blades of the AC plug.
The insulation resistance between each blade of the AC plug and accessible conductive parts (see above) should be greater than 1 megohm.
6. Always connect a test instrument's ground lead to the instrument chassis ground before connecting the positive lead; always remove the instrument's ground lead last.

1-3 Electrostatically Sensitive Devices (ESD) Precautions

Some semiconductor (solid state) devices can be easily damaged by static electricity. Such components are commonly called Electrostatically Sensitive Devices (ESD). Examples of typical ESD devices are integrated circuits and some field-effect transistors. The following techniques will reduce the incidence of component damage caused by static electricity.

1. Immediately before handling any semiconductor components or assemblies, drain the electrostatic charge from your body by touching a known earth ground. Alternatively, wear a discharging wrist-strap device. To avoid a shock hazard, be sure to remove the wrist strap before applying power to the monitor.
2. After removing an ESD-equipped assembly, place it on a conductive surface such as aluminum foil to prevent accumulation of an electrostatic charge.
3. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ESDs.
4. Use only a grounded-tip soldering iron to solder or desolder ESDs.
5. Use only an anti-static solder removal device. Some solder removal devices not classified as "anti-static" can generate electrical charges sufficient to damage ESDs.
6. Do not remove a replacement ESD from its protective package until you are ready to install it. Most replacement ESDs are packaged with leads that are electrically shorted together by conductive foam, aluminum foil or other conductive materials.
7. Immediately before removing the protective material from the leads of a replacement ESD, touch the protective material to the chassis or circuit assembly into which the device will be installed.
Caution: Be sure no power is applied to the chassis or circuit and observe all other safety precautions.
8. Minimize body motions when handling unpackaged replacement ESDs. Motions such as brushing clothes together, or lifting your foot from a carpeted floor can generate enough static electricity to damage an ESD.

2 Product Specifications

2-1 Specifications

Item	Description	
	ES15A*	ES17A*
LCD Panel	TFT-LCD panel, RGB vertical stripe, normaly white, 15-Inch viewable, 0.297 mm pixel pitch	TFT-LCD panel, RGB vertical stripe, normaly white, 17-Inch viewable, 0.264 mm pixel pitch
Scanning Frequency	Horizontal : 30 kHz ~ 69 kHz (Automatic) Vertical : 56 Hz ~ 85 Hz (Automatic)	30 kHz ~ 81 kHz (Automatic) 56 Hz ~ 76 Hz (Automatic)
Display Colors	16.7 Million colors	
Maximum Resolution	Horizontal : 1024 Pixels Vertical : 768 Pixels	1280 Pixels 1024 Pixels
Input Video Signal	Analog 0.7 Vp-p \pm 5% positive at 75 Ω , internally terminated	
Input Sync Signal	Type : Seperate H/V Sync-on-Green, automatic synchronization without external switch of sync type Level : TTL level	
Maximum Pixel Clock rate	95 MHz	135 MHz
Active Display Horizontal/Vertical	304.1 mm / 228.1 mm	338.1 mm / 270.1 mm
AC power voltage & Frequency	AC 90 ~ 264 Volts, 60 / 50 Hz \pm 3 Hz	
Power Consumption	40 W (Max)	52 W (Max)
Dimensions Unit (W x D x H) Carton (W x D x H)	18.6 x 15.6 x 8.0 Inches (474 x 397 x 204 mm) 22.6 x 18.3 x 10.2 Inches (577 x 465 x 259 mm)	20.8 x 17.6 x 8.0 Inches (529.2 x 447.7 x 204.4 mm) 24.0 x 20.0 x 10.1 Inches (611 x 511 x 258 mm)
Weight	3.95 Kg (8.7 lbs)	4.95 Kg (10.9 lbs)
Environmental Considerations	Operating Temperature : 50 °F ~ 104 °F (10 °C ~ 40 °C) Humidity : 10 % ~ 80 % Storage Temperature : -13 °F ~ 113 °F (-25 °C ~ 45 °C) Humidity : 5 % ~ 95 %	
TV System	Tunning	Frequency Synthesize
	Color	PAL, SECAM
	Sound	NICAM, A2 STEREO
Antena Input	75 Ω , Coaxial Cable	
Sound Characteristic	– MAX Internal speaker Out : Right => 3W Left => 3W	Right => 5W Left => 5W
	– BASS Control Range : -12dB~ + 12dB – TREBLE Control Range : -12dB~ + 12dB – Headphone Out: RF => 5mW max (400m Vrms) A/V => 10mW max (580 Vrms), Max Input sound: -9dBm – Output Frequency (TBD) : RF => 80 Hz ~ 15 kHz A/V => 80 Hz ~ 20 kHz	

2-2 Pin Assignments

<div> <div>Sync Type</div> <div>Pin No.</div> </div>	Separate H/V	Composite H/V	Sync-on-green
1	Red	Red	Red
2	Green	Green	Green + H/V Sync.
3	Blue	Blue	Blue
4	GND	GND	GND
5	GND (DDC Return)	GND (DDC Return)	GND (DDC Return)
6	GND-Red	GND-Red	GND-Red
7	GND-Green	GND-Green	GND-Green
8	GND-Blue	GND-Blue	GND-Blue
9	No Connection	No Connection	Not Used
10	GND-Sync./Self Test	GND-Sync./Self Test	GND-Sync./Self Test
11	GND	GND	GND
12	DDC Data	DDC Data	DDC Data
13	Horizontal sync.	H/V-Sync.	Not Used
14	Vertical sync.	Not Used	Not Used
15	DDC Clock	DDC Clock	DDC Clock



<div> <div>Sync Type</div> <div>Pin No.</div> </div>	DTV 15pin connector
1	Red , Y
2	Green , Pb
3	Blue , Pr
4	GND
5	GND
6	GND-Red
7	GND-Green
8	GND-Blue
9	GND
10	No Connection
11	GND
12	No Connection
13	Horizontal sync.
14	Vertical sync.
15	No Connection

2-3 Timing Chart

This section of the service manual describes the timing that the computer industry recognizes as standard for computer-generated video signals.

Table 2-1. Timing Chart

Mode Timing	IBM		VESA								
	VGA2/ 70 Hz 720 x 400	VGA3/ 60 Hz 640 x 480	640/75 Hz 640 x 480	640/85 Hz 640 x 480	800/75 Hz 800 x 600	800/85 Hz 800 x 600	1024/60Hz 1024 x 768	1024/75Hz 1024 x 768	1024/85Hz 1024x768	1280/76Hz 1280x1024 (17" Only)	1280/75Hz 1280x1024 (17" Only)
fH (kHz)	31.469	31.469	37.500	43.269	46.875	53.674	48.363	60.023	68.677	81.129	79.976
A μ sec	31.777	31.778	26.667	23.111	21.333	18.631	20.677	16.660	14.561	16.640	12.504
B μ sec	3.813	3.813	2.032	1.556	1.616	1.138	2.092	1.219	1.016	6.400	1.067
C μ sec	1.589	1.589	3.810	2.222	3.232	2.702	2.462	2.235	2.201	2.880	1.837
D μ sec	26.058	26.058	20.317	17.778	16.162	14.222	15.754	13.003	10.836		9.481
E μ sec	0.318	0.318	0.508	1.556	0.323	0.569	0.369	0.203	0.508	3.200	0.119
fV (Hz)	70.087	59.940	75.000	85.008	75.000	85.061	60.004	75.029	84.997	76.106	75.025
O msec	14.268	16.683	13.333	11.764	13.333	11.756	16.666	13.328	11.765	10.660	13.329
P msec	0.064	0.064	0.080	0.671	0.064	0.056	0.124	0.050	0.044	0.080	0.038
Q msec	0.858	0.794	0.427	0.578	0.448	0.503	0.600	0.466	0.524	3.200	0.475
R msec	13.155	15.761	12.800	11.093	12.800	11.179	15.880	12.795	11.183		12.804
S msec	0.191	0.064	0.027	0.023	0.021	0.019	0.062	0.017	0.015	0.020	0.013
Clock Freq. (MHz)	28.322	25.175	31.500	49.500	49.500	56.250	75.000	78.750	94.500	135.000	135.000
Polarity H.Sync	Negative	Negative	Negative	Negative	Positive	Positive	Negative	Positive	Positive	Negative	Positive
V.Sync	Positive	Negative	Negative	Negative	Positive	Positive	Negative	Positive	Positive	Negative	Positive
Remark	Separate	Separate	Separate	Separate	Separate	Separate	Separate	Separate	Separate	Com.	Separate

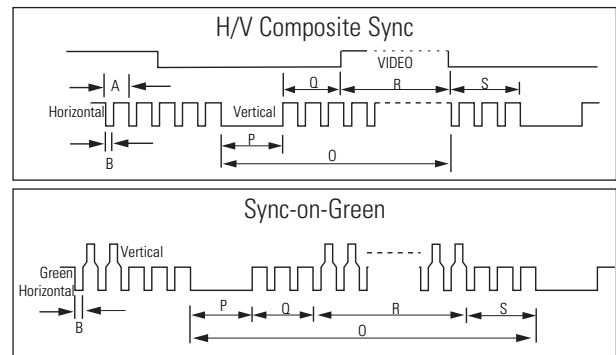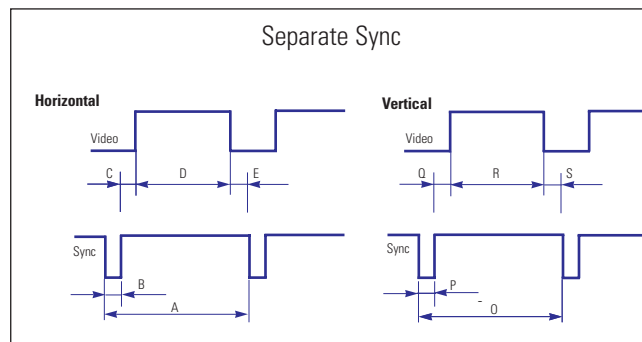

A : Line time total

B : Horizontal sync width

O : Frame time total

P : Vertical sync width

C : Back porch

D : Active time

Q : Back porch

R : Active time

E : Front porch

S : Front porch

Memo

3 Disassembly and Reassembly

This section of the service manual describes the disassembly and reassembly procedures for the ES15A*/ES17A* monitor.

WARNING: This monitor contains electrostatically sensitive devices. Use caution when handling these components.


3-1 Disassembly

Cautions: 1. Disconnect the monitor from the power source before disassembly.
2. Follow these directions carefully; never use metal instruments to pry apart the cabinet.


3-1 General Alignment Instruction

1. Usually, a color TV-VCR needs only slight touch-up adjustment upon installation. Check the basic characteristics such as height, horizontal and vertical sync.
2. Use the specified test equipment or its equivalent.
3. Correct impedance matching is essential.
4. Avoid overload. Excessive signal from a sweep generator might overload the front-end of the TV. When inserting signal markers, do not allow the marker generator to distort test result.
5. Connect the TV only to an DC power source with voltage and frequency as specified on the backcover nameplate.
6. Do not attempt to connect or disconnect any wire while the TV is turned on. Make sure that the power cord is disconnected before replacing any parts.
7. To protect against shock hazard, use an isolation transform.


3-2 Replacement Order of Lamp Assemblies

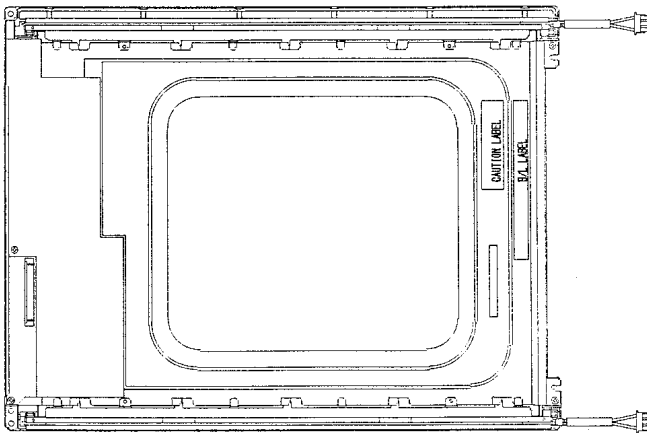


1. After confirm there is nothing on the desk
Turn the LCD module over and put it on a flat desk set to the ground.

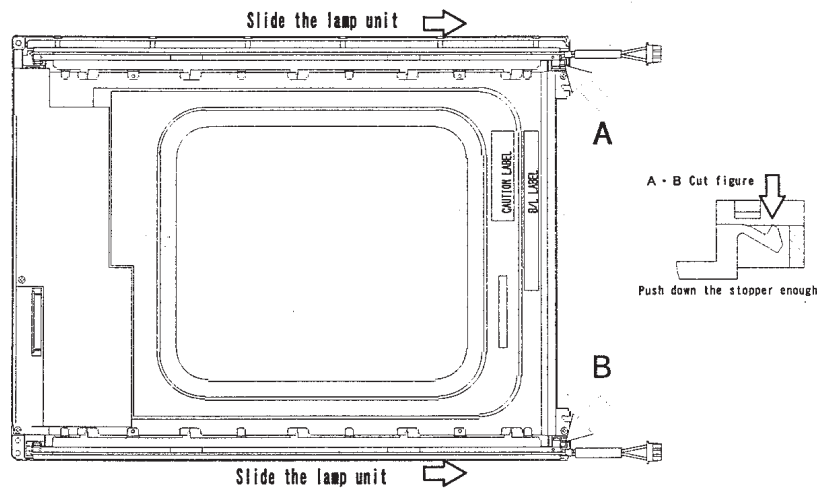

2. Push down the stopper and slide the lamp unit.

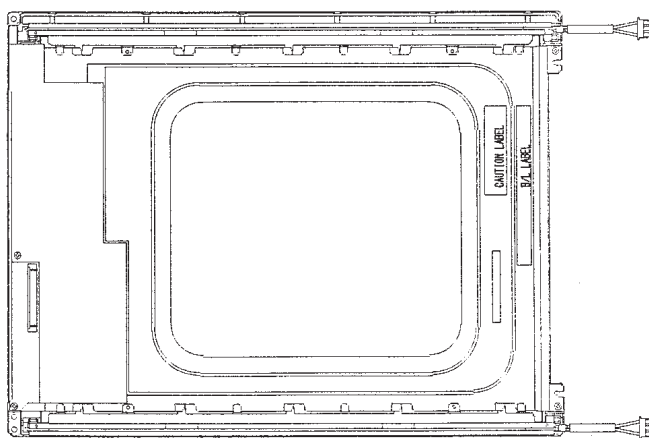

3. Please take out the lamp units from the LCD module.

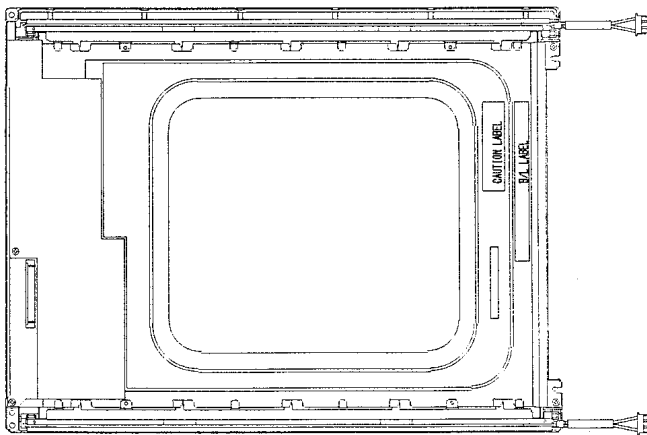

4. Please fix the new lamp units on the LCD module :
opposite process 2 and 3

* Replacement of lamp unit should be done at the power off state and recommended clean bench condition.

3-3 Reassembly

Reassembly procedures are in the reverse order of Disassembly procedures.

4 Alignments and Adjustments


4-1 General Alignment Instruction


1. Usually, a color TV-VCR needs only slight touch-up adjustment upon installation.
Check the basic characteristics such as height, horizontal and vertical sync.
2. Use the specified test equipment or its equivalent.
3. Correct impedance matching is essential.
4. Avoid overload. Excessive signal from a sweep generator might overload the front-end of the TV. When inserting signal markers, do not allow the marker generator to distort test result.
5. Connect the TV only to an AC power source with voltage and frequency as specified on the backcover nameplate.
6. Do not attempt to connect or disconnect any wire while the TV is turned on. Make sure that the power cord is disconnected before replacing any parts.
7. To protect against shock hazard, use an isolation transform.

Memo


5 Troubleshooting


5-1 No Power

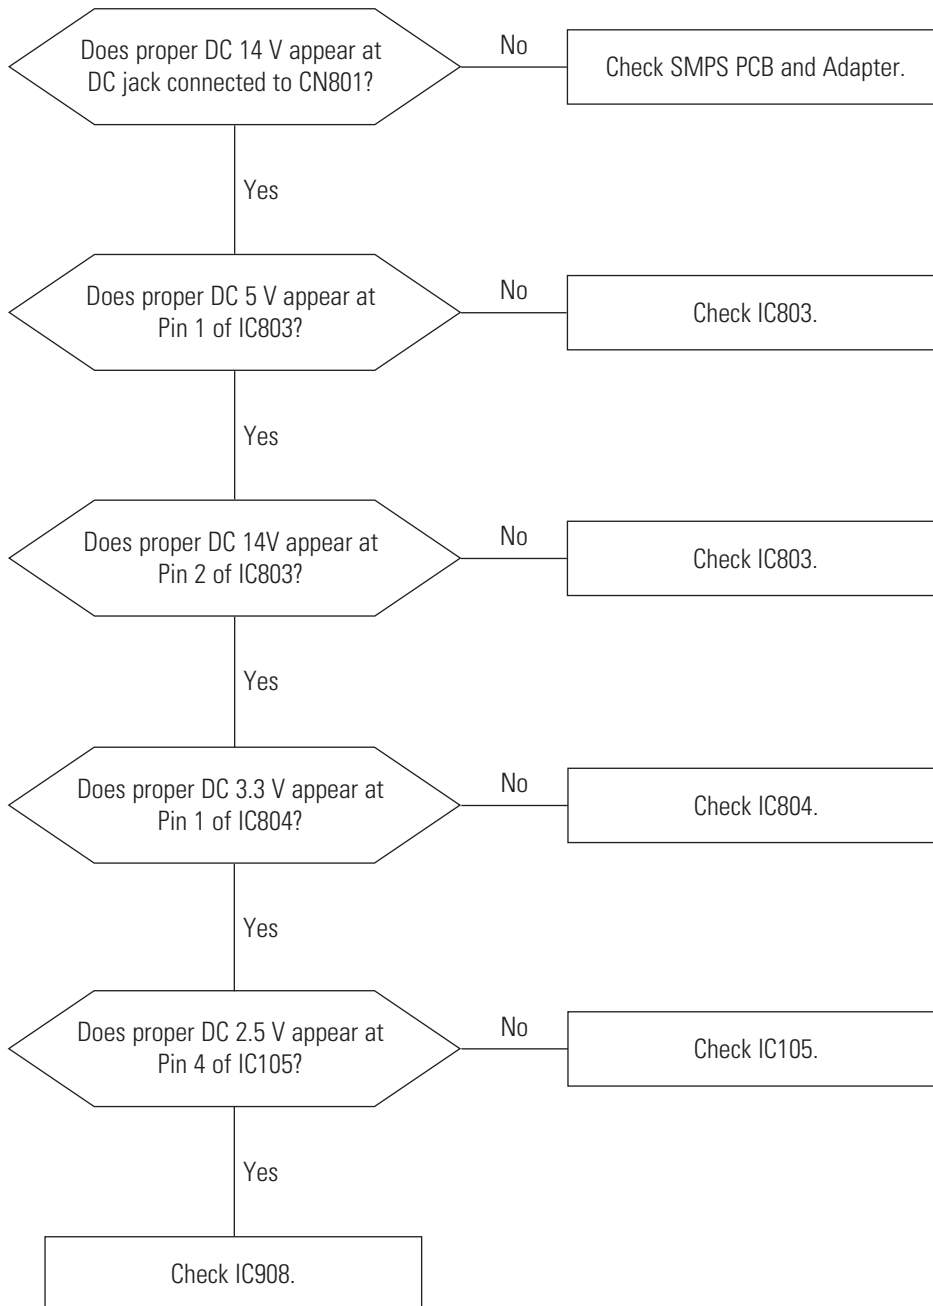

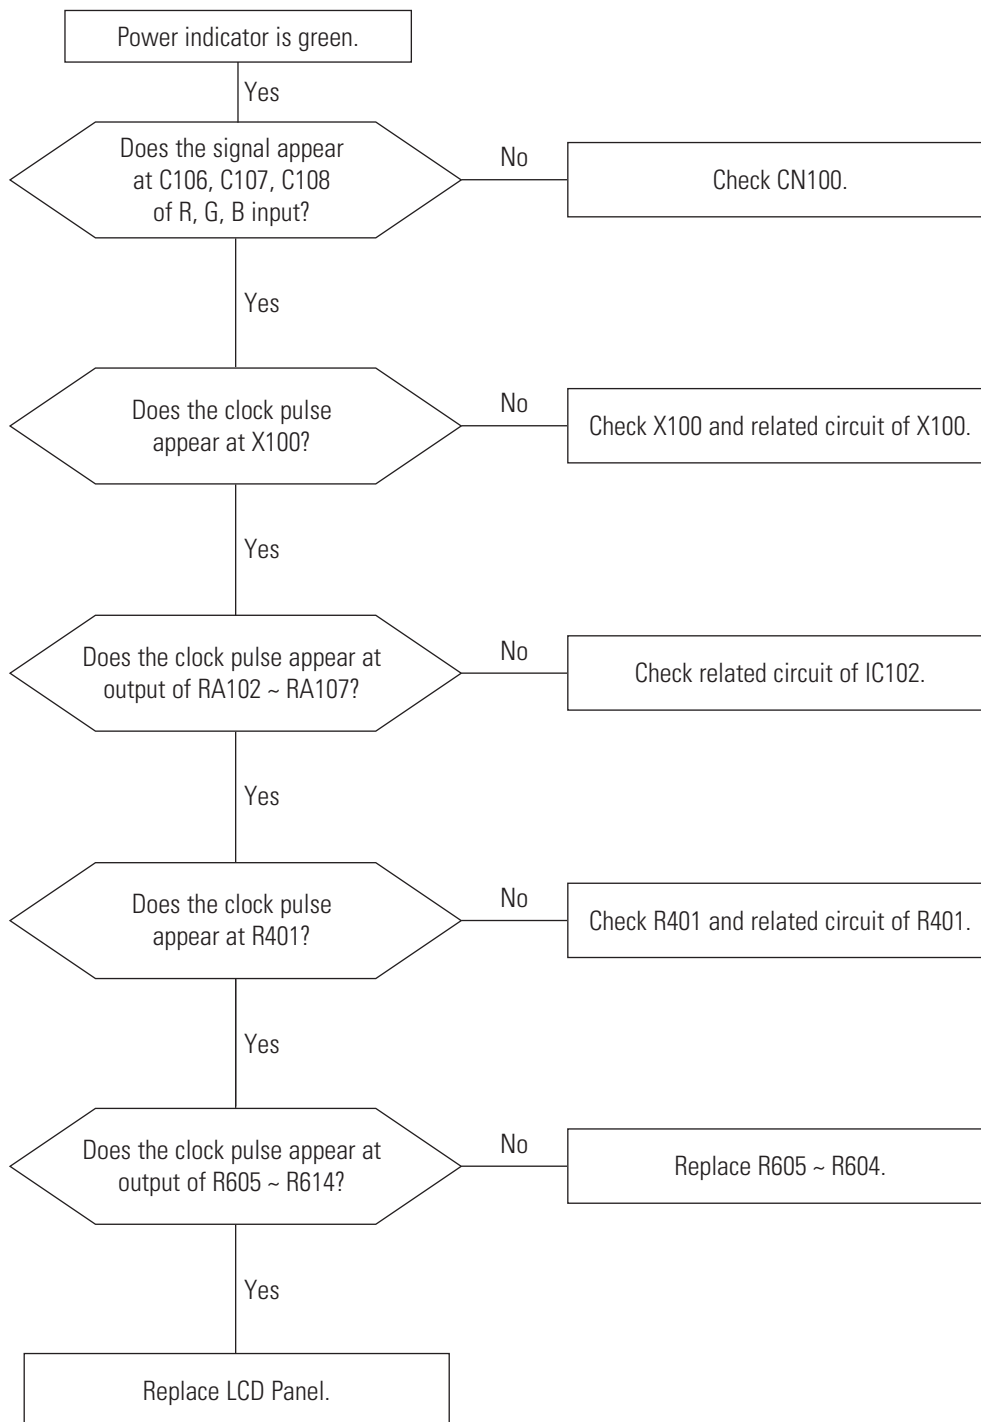5-2 No Video (PC Signal)


5-3 No Picture (TV, Video, S-Video, Scart Video)

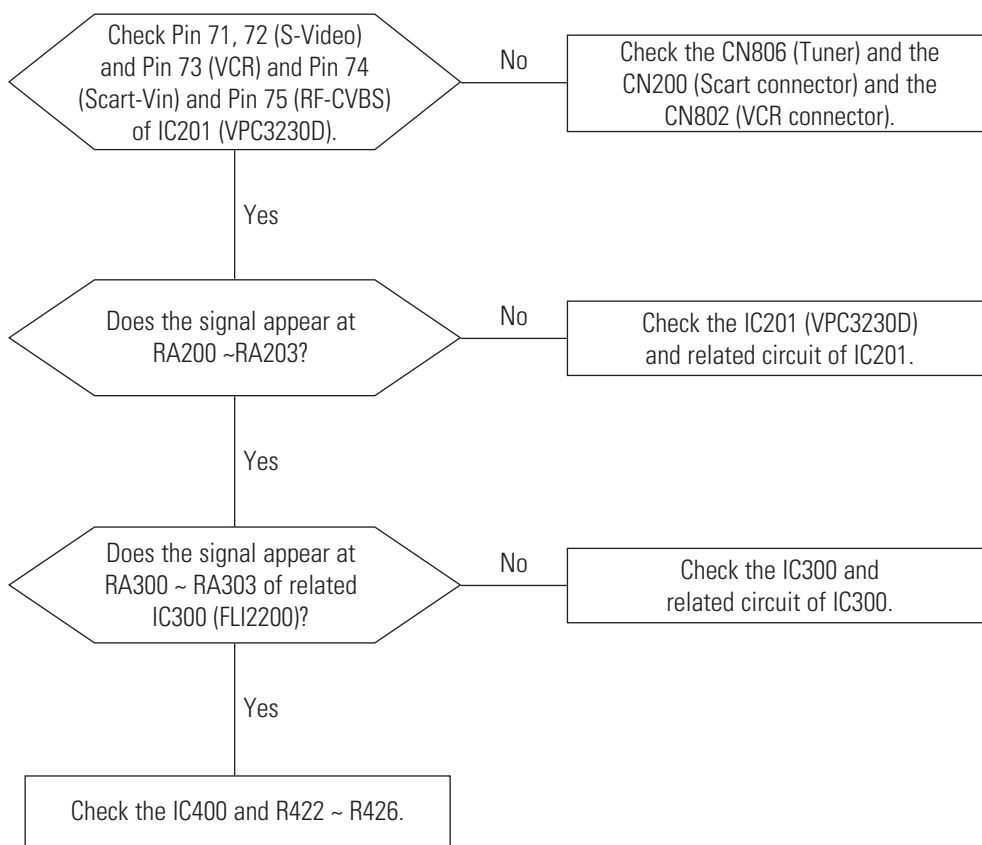

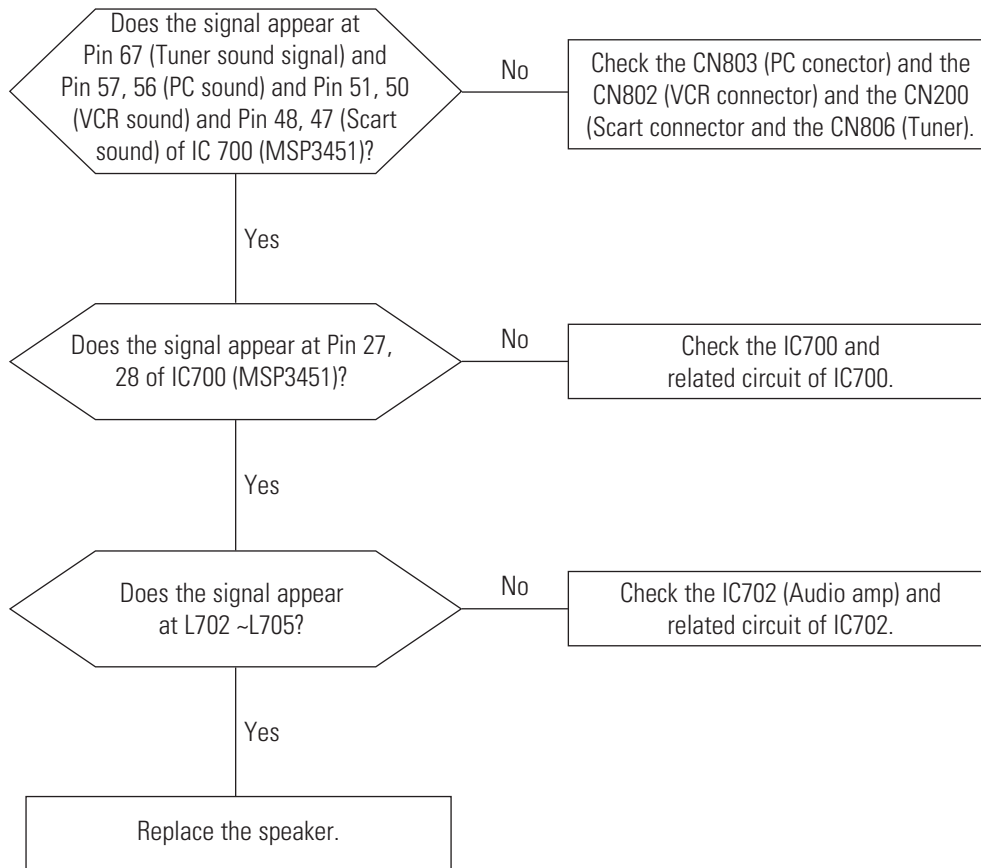
5-4 No Sound

6 Exploded View and Parts List

6-1 ES15A*

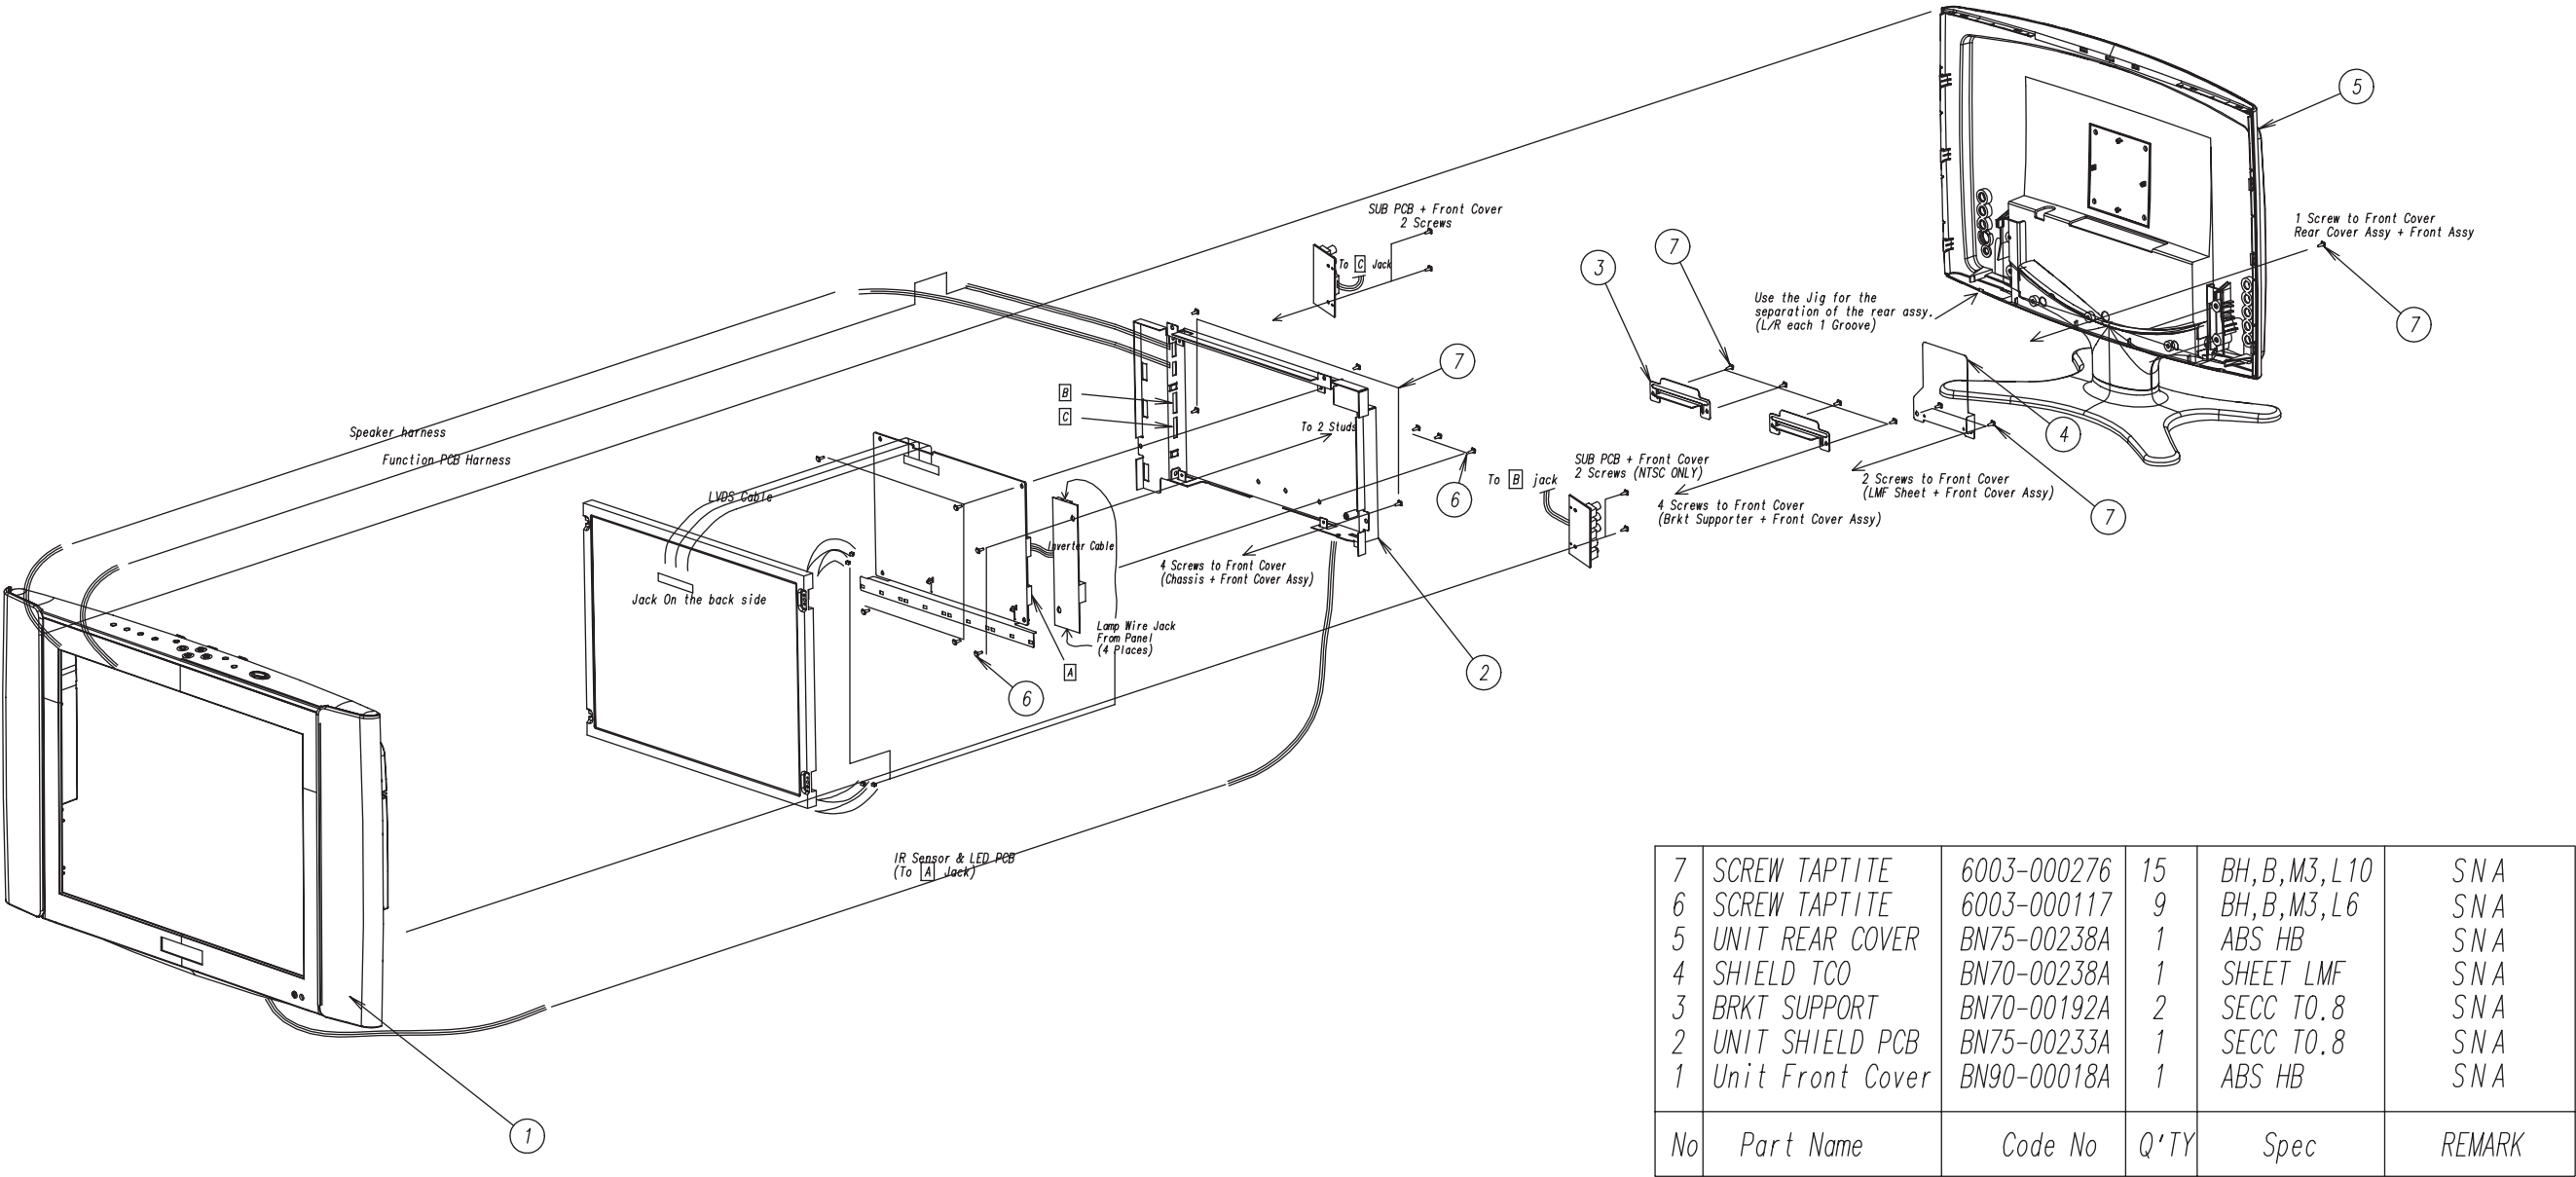

6-2 ES17A*

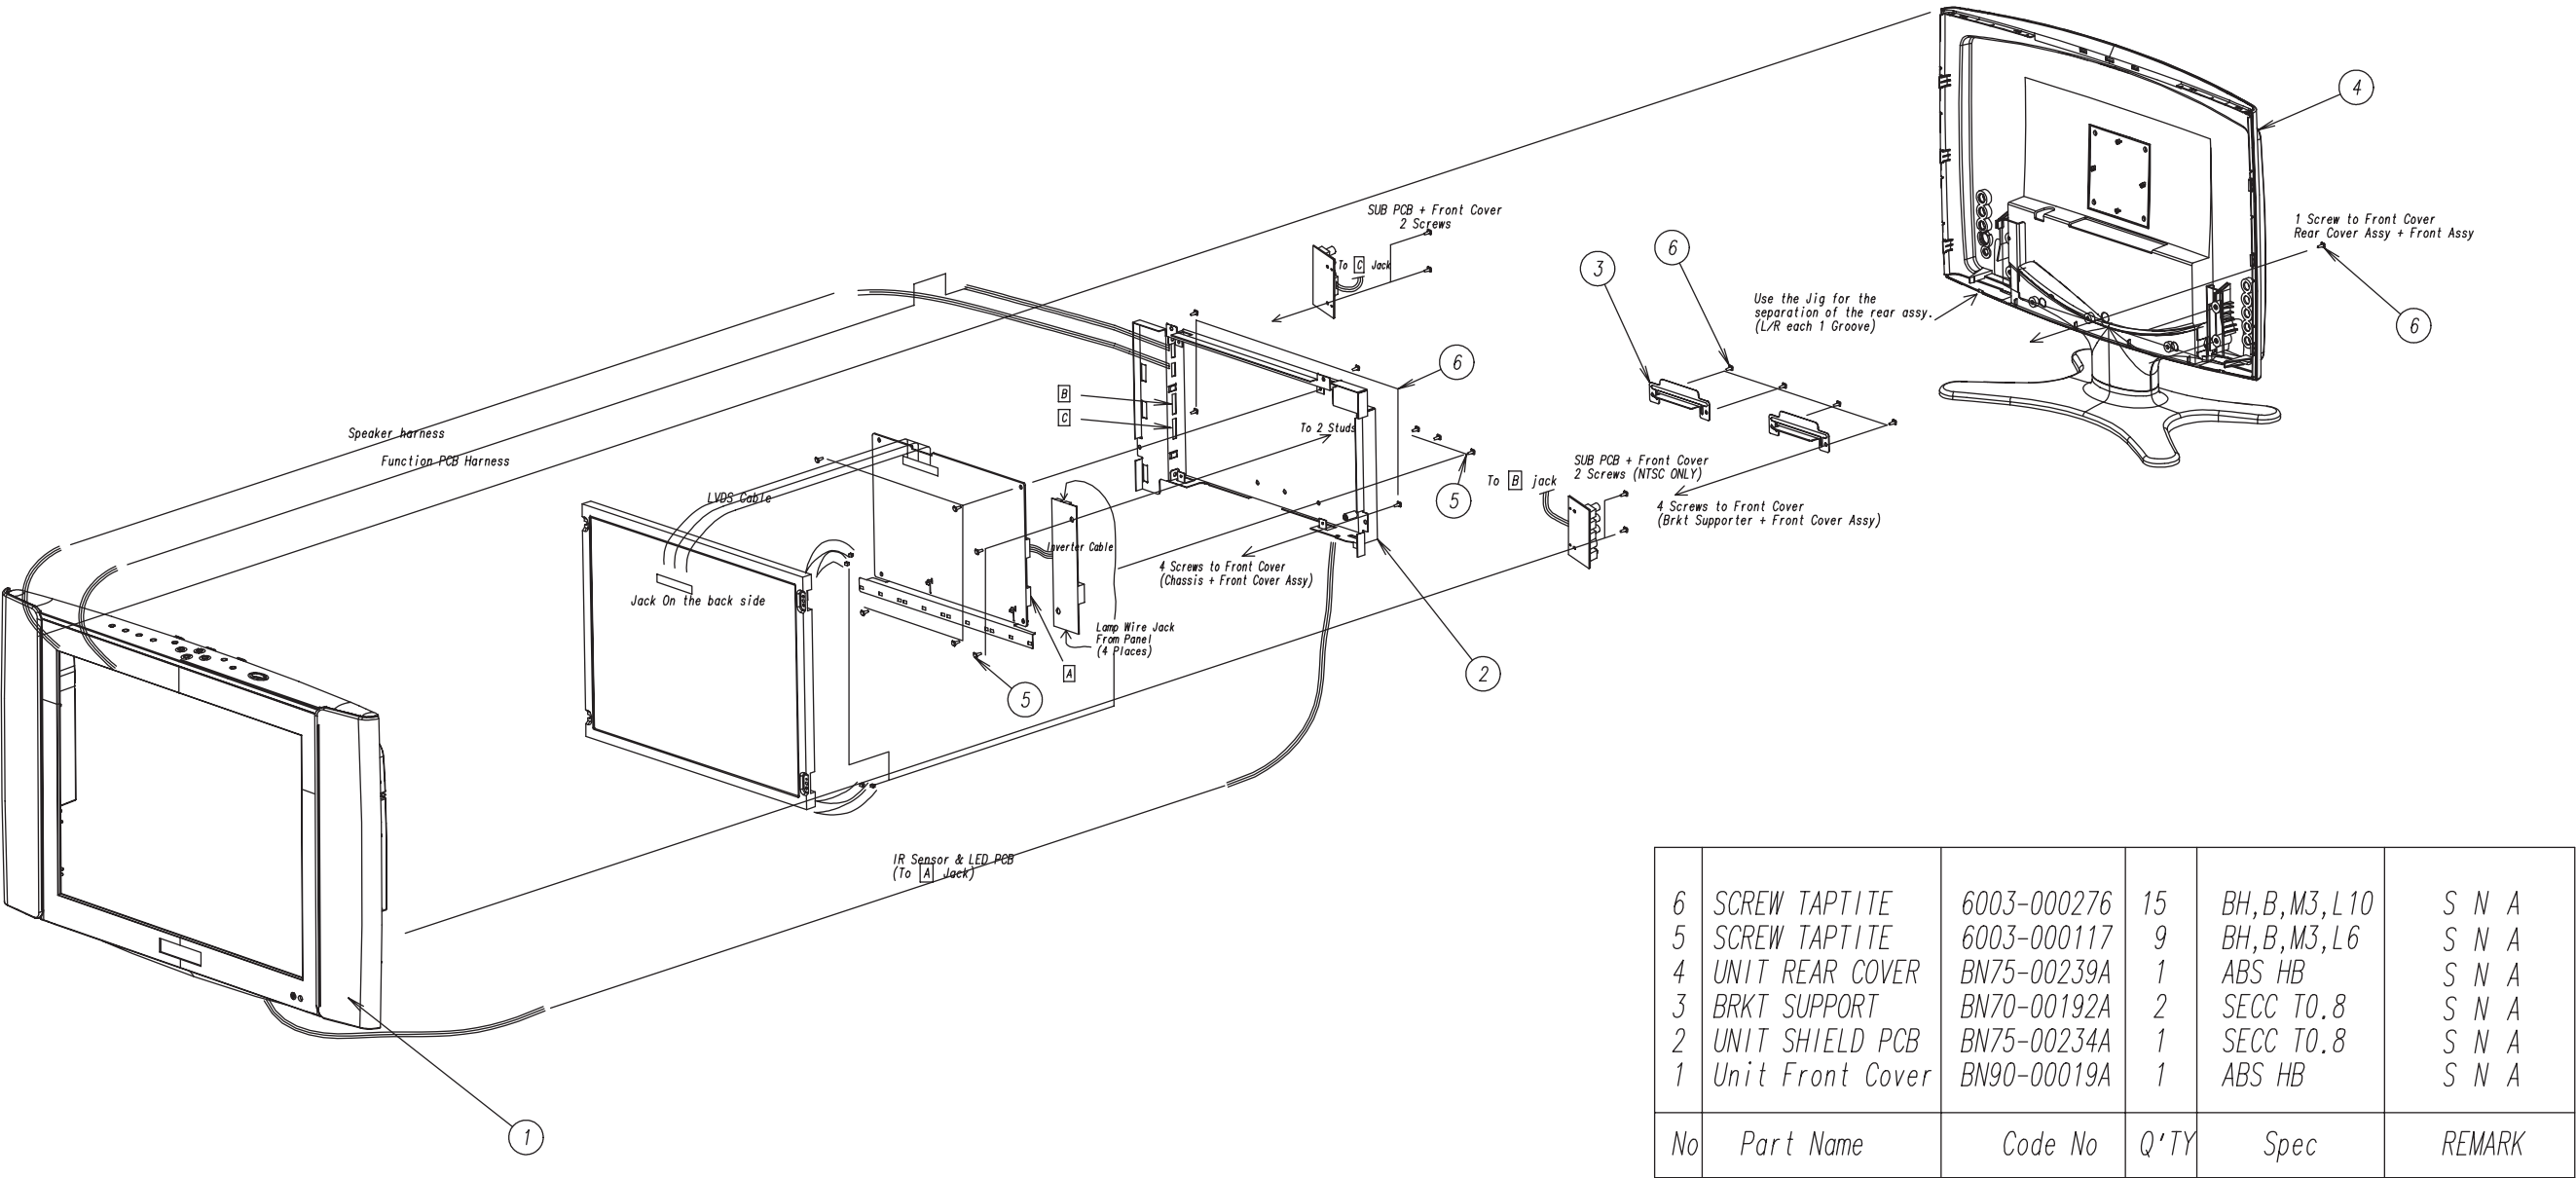

Item No	Design LOC		Spec	SERVICE
LW15E23CX/XEF				
EA-LW15E23CX/XEF	-	1	SEC, L06	-
BN90-00195E	-	ASSY STAND	GH17LS	SNA
6001-000154	STD+C/R	SCREW-MACHINE	BH,+,M4,L8,NI PLT,SWRCH18A,FP,-	
BN75-00242A	CIS	UNIT-STAND	EOS 15AS/NS,-,ABS,-,SV-012P,-,SPRAY,-	
6003-000009	CIS	SCREW-TAPTITE	BH,+,B,M4,L16,ZPC(YEL),SWRCH18	SNA
6003-001010	CIS	SCREW-TAPTITE	FH,+,B,M3,L6,ZPC(YEL),SWRCH18A	
6003-001315	CIS	SCREW-TAPTITE	BH,+,B,M4,L20,ZPC(YEL),SWRCH18A	SNA
BH73-60339A	CIS	RUBBER-LEG	SLC1400,EVA,GRAY,65HB,D1A13*H2	SNA
BN61-00159A	CIS	FRAME-STAND BASE	EOS/NIKE,EG1,T1.2	SNA
BN61-00184A	CIS	STAND-BASE	ES15AS,ABS PC,GR40,SV-012P	SNA
BN72-00254A	CIS	STAND-COVER REAR	EOS 15,ABS,HB,IV16,SPRAY	SNA
BN72-00257A	CIS	STAND FRONT	EOS 15,ABS,HB,16,SPRAY	SNA
BN75-00211A	CIS	UNIT-HINGE	EOS15,-,SECC T2.0,-,-,-,-,-	SNA
BN90-00200A	-	ASSY COVER FRONT	ES15AS	SNA
6003-001319	C/F+C/R	SCREW-TAPTITE	BH,+,B,M3,L10,NI PLT,SWRCH18A,-	SNA
BN90-00018F	CIS	ASSY COVER FRONT	ES15AS,ABS HB,BRIGHT SILVER,SV-012P PAL	
6002-000129	CIS	SCREW-TAPPING	FH,+,2S,M3,L8,ZPC(BLK),SM20C	SNA
6003-000276	CIS	SCREW-TAPTITE	BH,+,B,M3,L10,ZPC(YEL),SWCH10	SNA
BN59-00214A	CIS	BOARD	CN17VS,FUNCTION KEY,-,-,-,-,-	SNA
BN59-00216A	CIS	PBA SUB	CN17VS,IR PBA SUB,-,-,-,-,-	SNA
BN59-00262A	CIS	SPEAKER SYSTEM	EOS/NIKE15,EOS/NIKE15-R,100X42,WIRE:530MM	SNA
BN59-00263A	CIS	SPEAKER SYSTEM	EOS/NIKE17,EOS/NIKE17-L,100X42,WIRE:240MM	SNA
BN64-00031A	CIS	BADGE-BRAND	RB15AS,AL,T1.4,6.3,40.1,-,SILIVER,-	SNA
BN64-00035A	CIS	KNOB-FUNCTION	EOS15,ABS,IV16,-,-,HB,SPRAY,-,-	SNA
BN64-00039A	CIS	GRILLE-SPEAKER	EOS15,ABS,T2.7,-,-,HB,IV16,SPRAY	SNA
BN67-00020A	CIS	LENS-LED	EOS15,ACRYL,CLEAR,-,-,-,-,-	
BN72-00258A	CIS	COVER FRONT	EOS15,ABS,HB,IV16,SPRAY	SNA
BN90-00201A	-	ASSY COVER REAR	ES15AS	SNA
BN75-00238A	CIS	UNIT-REAR	EOS 15,-,ABS,-,SV-012P,-,SPRAY,-	
BN70-00176A	CIS	BRACKET VESA	RB15AS,SECC,1	SNA
BN72-00259A	CIS	COVER-REAR	EOS15,ABS,IV16,-,-,HB,-,-,SPRAY	SNA
BN91-00220A	-	ASSY LCD	ES15AS	SNA
BN07-00053A	CIS	LCD	LTM150XH-L06,CZB,6BIT_ FRC,331.6*254.76*12.5,16.19M,-,0.297*0.297,-,-,AMLCD/1 LV	
BN91-00221A	-	ASSY SHIELD	ES15AS	SNA
0203-001160	CIS	TAPE-FILAMENT	SCOTCH#8915,T0.16,W48,L55M,TRP	SNA
0203-001244	CIS	TAPE-AL FOIL	DK100-30-50,T40uM,W30,L50,SIL	SNA
6003-000117	SH/PCB+FU/HAR	SCREW-TAPTITE	BH,+,B,M3,L6,ZPC(YEL),SWRCH18A	SNA
6003-000276	C/F+AUD/PCB	SCREW-TAPTITE	BH,+,B,M3,L10,ZPC(YEL),SWCH10	SNA
6003-000276	C/F+B/GUIDE	SCREW-TAPTITE	BH,+,B,M3,L10,ZPC(YEL),SWCH10	SNA
6003-000276	C/F+SH/PCB	SCREW-TAPTITE	BH,+,B,M3,L10,ZPC(YEL),SWCH10	SNA
BN39-00202A	CIS	LEAD CONNECTOR-ASSY	EOS,UL2835#28,UL/CSA,12P,-,-,#28,SMH200-12,12505HS-12,BK,-,-,200MM,2835#28,SJ01-	
BN59-00215A	CIS	PBA SUB	CN17VS,AV PBA FUNCTION,-,-,-,-,-	
BN70-00192A	CIS	BRACKET-SUPPORT	RB15AS,SECC,0.8	SNA
BN91-00222A	-	ASSY CHASSIS	ES15AS	
BN94-00259A	-	ASSY PCB MAIN	ES15AS	SNA
0202-001044	CIS	SOLDER-WIRE.	S63S-W3.0,S63S,D3,63Sn/37Pb,-	SNA
0202-001046	CIS	SOLDER-WIRE FLUX	CF-110VH-2A,-,-,-,-,-	SNA
0202-001222	CIS	SOLDER-WIRE FLUX	RS-107,RS60-1.2AA,D1.2,SN60/PB40,-	SNA
0204-001095	CIS	THINNER	#4520,-,-,-	SNA
1204-001904	IC203	IC-PAL DECODER	SAA5264PS,SDIP,52P,600MIL,PLASTIC,3.6V,-,-,20TO+70C,ST,IC-DECODER	
2003-000797	R299	R-METAL OXIDE(S)	8.2ohm,5%,3W,AA,TP,6x16mm	

2201-000119	CIS	C-CERAMIC,DISC	100nF,+80-20%,50V,Y5V,TP,8x3,5	
2401-002286	C848	C-AL	470uF,20%,16V,WT,TP,10x12.5,5	
2401-002286	C849	C-AL	470uF,20%,16V,WT,TP,10x12.5,5	
2409-001044	C806	C-ORGANIC	100UF,+/-20%,16V,WT,TP,8X10.5,5	
2701-000116	L802	INDUCTOR-AXIAL	10uH,10%,4.2x9.8mm	
2701-000146	BD810	INDUCTOR-AXIAL	2.2uH,10%,2.5x3.4mm	
2701-000146	BD811	INDUCTOR-AXIAL	2.2uH,10%,2.5x3.4mm	
3701-001219	CN100	CONNECTOR-DSUB	15P,3R,FEMALE,ANGLE,AUF	
3704-000255	IC901 SOCK	SOCKET-IC	32P,DIP,SN,2.54mm	
3711-004270	CN700	CONNECTOR-HEADER	BOX,2P,1R,2MM,ANGLE,SN	SNA
3711-004386	CN701	CONNECTOR-HEADER	BOX,3P,1R,2mm,ANGLE,SN	SNA
3722-000117	CN801	JACK-DC POWER	3P,3.5MM,AG,BLK,NO	SNA
3722-000183	CN200	JACK-SCART	21P,4mm,SN,BLK,NO	
3722-001055	CN803	JACK-PHONE	5P/2C,3.6PI,AG,BLK,#16-22	
6003-000117	IN/PCB+SH/PCB	SCREW-TAPTITE	BH,+,B,M3,L6,ZPC(YEL),SWRCH18A	SNA
6003-000117	M/PCB+SH/PCB	SCREW-TAPTITE	BH,+,B,M3,L6,ZPC(YEL),SWRCH18A	SNA
6003-000117	SH/PCB+SH/D_SUB	SCREW-TAPTITE	BH,+,B,M3,L6,ZPC(YEL),SWRCH18A	SNA
BN39-00047A	CIS	CBF-HARNESS	100MM,100MM,BLU/WHT/GRY,UL1061,AWG28,51021-1200	
BN39-00201A	CIS	LEAD CONNECTOR-ASSY	ES15AS,UL2835#28,UL/CSA,6P,-,-,#28,12505HS-06,BK,-,-,170MM,2835#28,SJ	
BN39-00204A	CIS	LEAD CONNECTOR-ASSY	ES15AS,UL2835#28,UL/CSA,20P,#30,12507HS-20,12507HS-20,BK,130MM,2835#28,SJ01-01-2	
BN40-00005A	CN806	RF MODULATOR-PAL	TCPQ9091PD27D,PAL,-,-,-,5V,-10TO+65C,50DB,55DB	
BN44-00056A	CIS	INVERTER	GOGH,SIC1542,48KHZ,12VDC,1.5MARMS,5.6MARMS,48KHZ,37*140*16.0,4LAMP,40 56KV,-,SIC	
BN83-00065A	U4	CKD-BN44-00056A	BN44-00056A,1203-000560	SNA
BN83-00066A	U1	CKD-BN44-00056A	BN44-00056A,1201-000471	SNA
BN83-00067A	U2	CKD-BN44-00056A	BN44-00056A,1202-000104	SNA
BN83-00067A	U3	CKD-BN44-00056A	BN44-00056A,1202-000104	SNA
BN83-00067A	U5	CKD-BN44-00056A	BN44-00056A,1202-000104	SNA
BN83-00068A	Q2	CKD-BN44-00056A	BN44-00056A,0504-000158	SNA
BN83-00069A	Q12	CKD-BN44-00056A	BN44-00056A,0501-000457	SNA
BN83-00069A	Q5	CKD-BN44-00056A	BN44-00056A,0501-000457	SNA
BN83-00070A	Q1	CKD-BN44-00056A	BN44-00056A,0504-000129	SNA
BN83-00070A	Q10	CKD-BN44-00056A	BN44-00056A,0504-000129	SNA
BN83-00070A	Q11	CKD-BN44-00056A	BN44-00056A,0504-000129	SNA
BN83-00070A	Q16	CKD-BN44-00056A	BN44-00056A,0504-000129	SNA
BN83-00070A	Q17	CKD-BN44-00056A	BN44-00056A,0504-000129	SNA
BN83-00070A	Q18	CKD-BN44-00056A	BN44-00056A,0504-000129	SNA
BN83-00070A	Q3	CKD-BN44-00056A	BN44-00056A,0504-000129	SNA
BN83-00070A	Q4	CKD-BN44-00056A	BN44-00056A,0504-000129	SNA
BN83-00070A	Q9	CKD-BN44-00056A	BN44-00056A,0504-000129	SNA
BN83-00071A	Q23	CKD-BN44-00056A	BN44-00056A,0501-000462	SNA
BN83-00071A	Q24	CKD-BN44-00056A	BN44-00056A,0501-000462	SNA
BN83-00072A	Q13	CKD-BN44-00056A	BN44-00056A,0505-001160	SNA
BN83-00072A	Q6	CKD-BN44-00056A	BN44-00056A,0505-001160	SNA
BN83-00073A	Q14	CKD-BN44-00056A	BN44-00056A,0501-002186	SNA
BN83-00073A	Q15	CKD-BN44-00056A	BN44-00056A,0501-002186	SNA
BN83-00073A	Q7	CKD-BN44-00056A	BN44-00056A,0501-002186	SNA
BN83-00073A	Q8	CKD-BN44-00056A	BN44-00056A,0501-002186	SNA
BN83-00074A	D10	CKD-BN44-00056A	BN44-00056A,0407-000114	SNA
BN83-00074A	D12	CKD-BN44-00056A	BN44-00056A,0407-000114	SNA
BN83-00074A	D19	CKD-BN44-00056A	BN44-00056A,0407-000114	SNA
BN83-00074A	D2	CKD-BN44-00056A	BN44-00056A,0407-000114	SNA
BN83-00074A	D20	CKD-BN44-00056A	BN44-00056A,0407-000114	SNA
BN83-00074A	D7	CKD-BN44-00056A	BN44-00056A,0407-000114	SNA
BN83-00075A	D13	CKD-BN44-00056A	BN44-00056A,0402-001110	SNA
BN83-00075A	D3	CKD-BN44-00056A	BN44-00056A,0402-001110	SNA

BN83-00076A	D14	CKD-BN44-00056A	BN44-00056A,0407-000122	SNA
BN83-00076A	D4	CKD-BN44-00056A	BN44-00056A,0407-000122	SNA
BN83-00077A	D15	CKD-BN44-00056A	BN44-00056A,0407-000116	SNA
BN83-00077A	D16	CKD-BN44-00056A	BN44-00056A,0407-000116	SNA
BN83-00077A	D5	CKD-BN44-00056A	BN44-00056A,0407-000116	SNA
BN83-00077A	D6	CKD-BN44-00056A	BN44-00056A,0407-000116	SNA
BN83-00078A	C3	CKD-BN44-00056A	BN44-00056A,2401-003400	SNA
BN83-00079A	C14	CKD-BN44-00056A	BN44-00056A,2301-001336	SNA
BN83-00079A	C5	CKD-BN44-00056A	BN44-00056A,2301-001336	SNA
BN83-00080A	C15	CKD-BN44-00056A	BN44-00056A,2201-002122	SNA
BN83-00080A	C16	CKD-BN44-00056A	BN44-00056A,2201-002122	SNA
BN83-00080A	C6	CKD-BN44-00056A	BN44-00056A,2201-002122	SNA
BN83-00080A	C7	CKD-BN44-00056A	BN44-00056A,2201-002122	SNA
BN83-00081A	C1	CKD-BN44-00056A	BN44-00056A,2203-000206	SNA
BN83-00081A	C17	CKD-BN44-00056A	BN44-00056A,2203-000206	SNA
BN83-00081A	C18	CKD-BN44-00056A	BN44-00056A,2203-000206	SNA
BN83-00081A	C23	CKD-BN44-00056A	BN44-00056A,2203-000206	SNA
BN83-00081A	C50	CKD-BN44-00056A	BN44-00056A,2203-000206	SNA
BN83-00081A	C8	CKD-BN44-00056A	BN44-00056A,2203-000206	SNA
BN83-00081A	C9	CKD-BN44-00056A	BN44-00056A,2203-000206	SNA
BN83-00082A	C12	CKD-BN44-00056A	BN44-00056A,2203-001458	SNA
BN83-00082A	C21	CKD-BN44-00056A	BN44-00056A,2203-001458	SNA
BN83-00083A	C13	CKD-BN44-00056A	BN44-00056A,2203-000455	SNA
BN83-00083A	C22	CKD-BN44-00056A	BN44-00056A,2203-000455	SNA
BN83-00084A	C30	CKD-BN44-00056A	BN44-00056A,2203-000590	SNA
BN83-00084A	C31	CKD-BN44-00056A	BN44-00056A,2203-000590	SNA
BN83-00085A	C2	CKD-BN44-00056A	BN44-00056A,2203-001130	SNA
BN83-00086A	C10	CKD-BN44-00056A	BN44-00056A,2203-002793	SNA
BN83-00086A	C11	CKD-BN44-00056A	BN44-00056A,2203-002793	SNA
BN83-00086A	C19	CKD-BN44-00056A	BN44-00056A,2203-002793	SNA
BN83-00086A	C20	CKD-BN44-00056A	BN44-00056A,2203-002793	SNA
BN83-00087A	R19	CKD-BN44-00056A	BN44-00056A,2007-000671	SNA
BN83-00087A	R20	CKD-BN44-00056A	BN44-00056A,2007-000671	SNA
BN83-00087A	R45	CKD-BN44-00056A	BN44-00056A,2007-000671	SNA
BN83-00087A	R46	CKD-BN44-00056A	BN44-00056A,2007-000671	SNA
BN83-00088A	R2	CKD-BN44-00056A	BN44-00056A,2007-001010	SNA
BN83-00089A	R21	CKD-BN44-00056A	BN44-00056A,2007-000794	SNA
BN83-00089A	R22	CKD-BN44-00056A	BN44-00056A,2007-000794	SNA
BN83-00089A	R47	CKD-BN44-00056A	BN44-00056A,2007-000794	SNA
BN83-00089A	R48	CKD-BN44-00056A	BN44-00056A,2007-000794	SNA
BN83-00089A	R63	CKD-BN44-00056A	BN44-00056A,2007-000794	SNA
BN83-00089A	R66	CKD-BN44-00056A	BN44-00056A,2007-000794	SNA
BN83-00090A	R1	CKD-BN44-00056A	BN44-00056A,2007-000098	SNA
BN83-00090A	R23	CKD-BN44-00056A	BN44-00056A,2007-000098	SNA
BN83-00090A	R24	CKD-BN44-00056A	BN44-00056A,2007-000098	SNA
BN83-00090A	R29	CKD-BN44-00056A	BN44-00056A,2007-000098	SNA
BN83-00090A	R3	CKD-BN44-00056A	BN44-00056A,2007-000098	SNA
BN83-00090A	R49	CKD-BN44-00056A	BN44-00056A,2007-000098	SNA
BN83-00090A	R50	CKD-BN44-00056A	BN44-00056A,2007-000098	SNA
BN83-00090A	R55	CKD-BN44-00056A	BN44-00056A,2007-000098	SNA
BN83-00091A	R25	CKD-BN44-00056A	BN44-00056A,2007-000096	SNA
BN83-00091A	R52	CKD-BN44-00056A	BN44-00056A,2007-000096	SNA
BN83-00092A	R31	CKD-BN44-00056A	BN44-00056A,2007-000872	SNA
BN83-00092A	R34	CKD-BN44-00056A	BN44-00056A,2007-000872	SNA
BN83-00092A	R57	CKD-BN44-00056A	BN44-00056A,2007-000872	SNA

BN83-00092A	R8	CKD-BN44-00056A	BN44-00056A, 2007-000872	SNA
BN83-00093A	R27	CKD-BN44-00056A	BN44-00056A, 2007-000092	SNA
BN83-00093A	R54	CKD-BN44-00056A	BN44-00056A, 2007-000092	SNA
BN83-00093A	R62	CKD-BN44-00056A	BN44-00056A, 2007-000092	SNA
BN83-00093A	R65	CKD-BN44-00056A	BN44-00056A, 2007-000092	SNA
BN83-00093A	R94	CKD-BN44-00056A	BN44-00056A, 2007-000092	SNA
BN83-00094A	R28	CKD-BN44-00056A	BN44-00056A, 2007-000102	SNA
BN83-00094A	R70	CKD-BN44-00056A	BN44-00056A, 2007-000102	SNA
BN83-00094A	R77	CKD-BN44-00056A	BN44-00056A, 2007-000102	SNA
BN83-00094A	R78	CKD-BN44-00056A	BN44-00056A, 2007-000102	SNA
BN83-00094A	R84	CKD-BN44-00056A	BN44-00056A, 2007-000102	SNA
BN83-00094A	R85	CKD-BN44-00056A	BN44-00056A, 2007-000102	SNA
BN83-00094A	R91	CKD-BN44-00056A	BN44-00056A, 2007-000102	SNA
BN83-00094A	R92	CKD-BN44-00056A	BN44-00056A, 2007-000102	SNA
BN83-00095A	R73	CKD-BN44-00056A	BN44-00056A, 2007-000122	SNA
BN83-00095A	R74	CKD-BN44-00056A	BN44-00056A, 2007-000122	SNA
BN83-00095A	R75	CKD-BN44-00056A	BN44-00056A, 2007-000122	SNA
BN83-00095A	R76	CKD-BN44-00056A	BN44-00056A, 2007-000122	SNA
BN83-00096A	R5	CKD-BN44-00056A	BN44-00056A, 2007-000129	SNA
BN83-00097A	R6	CKD-BN44-00056A	BN44-00056A, 2007-001114	SNA
BN83-00097A	R79	CKD-BN44-00056A	BN44-00056A, 2007-001114	SNA
BN83-00098A	R69	CKD-BN44-00056A	BN44-00056A, 2007-000269	SNA
BN83-00099A	R71	CKD-BN44-00056A	BN44-00056A, 2007-000093	SNA
BN83-00099A	R72	CKD-BN44-00056A	BN44-00056A, 2007-000093	SNA
BN83-00100A	R35	CKD-BN44-00056A	BN44-00056A, 2007-000130	SNA
BN83-00100A	R4	CKD-BN44-00056A	BN44-00056A, 2007-000130	SNA
BN83-00100A	R9	CKD-BN44-00056A	BN44-00056A, 2007-000130	SNA
BN83-00101A	R10	CKD-BN44-00056A	BN44-00056A, 2007-000090	SNA
BN83-00101A	R30	CKD-BN44-00056A	BN44-00056A, 2007-000090	SNA
BN83-00101A	R36	CKD-BN44-00056A	BN44-00056A, 2007-000090	SNA
BN83-00101A	R56	CKD-BN44-00056A	BN44-00056A, 2007-000090	SNA
BN83-00101A	R61	CKD-BN44-00056A	BN44-00056A, 2007-000090	SNA
BN83-00101A	R64	CKD-BN44-00056A	BN44-00056A, 2007-000090	SNA
BN83-00101A	R95	CKD-BN44-00056A	BN44-00056A, 2007-000090	SNA
BN83-00102A	R11	CKD-BN44-00056A	BN44-00056A, 2007-000934	SNA
BN83-00102A	R12	CKD-BN44-00056A	BN44-00056A, 2007-000934	SNA
BN83-00102A	R13	CKD-BN44-00056A	BN44-00056A, 2007-000934	SNA
BN83-00102A	R14	CKD-BN44-00056A	BN44-00056A, 2007-000934	SNA
BN83-00102A	R37	CKD-BN44-00056A	BN44-00056A, 2007-000934	SNA
BN83-00102A	R38	CKD-BN44-00056A	BN44-00056A, 2007-000934	SNA
BN83-00102A	R39	CKD-BN44-00056A	BN44-00056A, 2007-000934	SNA
BN83-00102A	R40	CKD-BN44-00056A	BN44-00056A, 2007-000934	SNA
BN83-00103A	R80	CKD-BN44-00056A	BN44-00056A, 2007-000070	SNA
BN83-00103A	R83	CKD-BN44-00056A	BN44-00056A, 2007-000070	SNA
BN83-00103A	R93	CKD-BN44-00056A	BN44-00056A, 2007-000070	SNA
BN83-00104A	R81	CKD-BN44-00056A	BN44-00056A, 2007-002422	SNA
BN83-00104A	R82	CKD-BN44-00056A	BN44-00056A, 2007-002422	SNA
BN83-00105A	R86	CKD-BN44-00056A	BN44-00056A, 2007-000691	SNA
BN83-00105A	R87	CKD-BN44-00056A	BN44-00056A, 2007-000691	SNA
BN83-00106A	R100	CKD-BN44-00056A	BN44-00056A, 2104-000224	SNA
BN83-00107A	L1	CKD-BN44-00056A	BN44-00056A, LH27-00145A	SNA
BN83-00107A	L2	CKD-BN44-00056A	BN44-00056A, LH27-00145A	SNA
BN83-00108A	F1	CKD-BN44-00056A	BN44-00056A, 3601-001038	SNA
BN83-00109A	T1	CKD-BN44-00056A	BN44-00056A, LH26-00144A	SNA
BN83-00109A	T2	CKD-BN44-00056A	BN44-00056A, LH26-00144A	SNA

BN83-00110A	CN1	CKD-BN44-00056A	BN44-00056A,3711-000556	SNA
BN83-00111A	CN2	CKD-BN44-00056A	BN44-00056A,3711-004702	SNA
BN83-00111A	CN3	CKD-BN44-00056A	BN44-00056A,3711-004702	SNA
BN83-00111A	CN4	CKD-BN44-00056A	BN44-00056A,3711-004702	SNA
BN83-00111A	CN5	CKD-BN44-00056A	BN44-00056A,3711-004702	SNA
BN83-00112A	PCB	CKD-BN44-00056A	BN44-00056A,LH41-00214A	SNA
BN83-00113A	INSULATOR	CKD-BN44-00056A	BN44-00056A,LH72-00170A	SNA
BN83-00137A	CIS	CKD-BN44-00056A	BN44-00056A,2007-000091	SNA
BN63-00003A	CIS	GASKET-SHIELD	LSA700,POLYURETHANE SPONGE,-,-,35MM,-,-,-	SNA
BN63-00059A	CIS	GASKET	GH17MS,CONDUCTIVE FABRIC,5MM,160MM,17MM,-,-,EMI-GASKET	SNA
BN63-00066A	CIS	SHIELD-D SUB	EOS15,SPT,TO.5,-,-,-,-	SNA
BN63-00121A	CIS	GASKET	EOS,CONDUCTIVE FABRIC,4MM,30MM,80MM,GRAY,71TSSK 30-4-80-13,71TSSK 30-4-80-13	SNA
BN63-00133A	CIS	GASKET	EOS,CONDUCTIVE FABRIC,17MM,5MM,260MM,GRAY,71TSK17-5-260-13,71TSK17-5-260-13	SNA
BN75-00233A	CIS	UNIT-SHIELD PCB	EOS 15",-,-,SECC,TO.8,-,-,-,-	SNA
BN97-00054H	-	ASSY MICOM	ES15AS,-,-,-,-,-,-,-	
1102-001128	IC901	IC-EPROM	M27C2001,256KX8BIT,PDIP,32P,535MIL,55NS,5V,10%,PLASTIC,0TO+70C,-,-,ST	
BN46-00009D	CIS	S/W MICOM	ES15AS,-,-,-,-,-,-,-	SNA
BN97-00059A	-	ASSY SMD-MAIN	ES15AS	SNA
0202-001162	CIS	SOLDER-CREAM	RMA-20-21L,S63,-,SN63/PB36.6/AGO.4,FLUX9.5%	SNA
0401-001056	D100	DIODE-SWITCHING	MMBD4148SE,75V,200MA,SOT-23,TP	
0401-001056	D101	DIODE-SWITCHING	MMBD4148SE,75V,200MA,SOT-23,TP	
0401-001056	D102	DIODE-SWITCHING	MMBD4148SE,75V,200MA,SOT-23,TP	
0401-001056	ZD102	DIODE-SWITCHING	MMBD4148SE,75V,200MA,SOT-23,TP	
0401-001056	ZD103	DIODE-SWITCHING	MMBD4148SE,75V,200MA,SOT-23,TP	
0401-001056	ZD104	DIODE-SWITCHING	MMBD4148SE,75V,200MA,SOT-23,TP	
0402-000553	D801	DIODE-RECTIFIER	SS24,40V,2.0A,D0-214AA	
0402-000553	D802	DIODE-RECTIFIER	SS24,40V,2.0A,D0-214AA	
0402-000553	D803	DIODE-RECTIFIER	SS24,40V,2.0A,D0-214AA	
0403-000277	ZD807	DIODE-ZENER	MMBZ5226B,3.3V,5%,225mW,SOT-23	
0403-000277	ZD808	DIODE-ZENER	MMBZ5226B,3.3V,5%,225mW,SOT-23	
0403-000277	ZD809	DIODE-ZENER	MMBZ5226B,3.3V,5%,225mW,SOT-23	
0403-000277	ZD810	DIODE-ZENER	MMBZ5226B,3.3V,5%,225mW,SOT-23	
0403-000579	ZD100	DIODE-ZENER	BZX84C5V1,5.1V,5%,200mW,SOT-23	
0403-000579	ZD101	DIODE-ZENER	BZX84C5V1,5.1V,5%,200mW,SOT-23	
0403-000579	ZD207	DIODE-ZENER	BZX84C5V1,5.1V,5%,200mW,SOT-23	
0403-000579	ZD800	DIODE-ZENER	BZX84C5V1,5.1V,5%,200mW,SOT-23	
0403-000579	ZD801	DIODE-ZENER	BZX84C5V1,5.1V,5%,200mW,SOT-23	
0403-000579	ZD802	DIODE-ZENER	BZX84C5V1,5.1V,5%,200mW,SOT-23	
0403-000579	ZD803	DIODE-ZENER	BZX84C5V1,5.1V,5%,200mW,SOT-23	
0403-000579	ZD804	DIODE-ZENER	BZX84C5V1,5.1V,5%,200mW,SOT-23	
0403-000579	ZD805	DIODE-ZENER	BZX84C5V1,5.1V,5%,200mW,SOT-23	
0403-000579	ZD806	DIODE-ZENER	BZX84C5V1,5.1V,5%,200mW,SOT-23	
0403-000579	ZD900	DIODE-ZENER	BZX84C5V1,5.1V,5%,200mW,SOT-23	
0403-001052	D114	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0403-001052	D115	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0403-001052	D116	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0403-001052	D117	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0403-001052	D200	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0403-001052	D201	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0403-001052	D202	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0403-001052	D203	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0403-001052	ZD200	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0403-001052	ZD201	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0403-001052	ZD202	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0403-001052	ZD203	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	

0403-001052	ZD204	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0403-001052	ZD205	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0403-001052	ZD206	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0403-001052	ZD811	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0403-001052	ZD812	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0403-001052	ZD813	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0403-001052	ZD814	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0403-001052	ZD815	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0403-001052	ZD816	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0403-001052	ZD817	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0403-001052	ZD818	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0403-001052	ZD819	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0403-001052	ZD820	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0403-001052	ZD821	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S	
0501-002080	Q100	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270	
0501-002080	Q101	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270	
0501-002080	Q200	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270	
0501-002080	Q201	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270	
0501-002080	Q202	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270	
0501-002080	Q800	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270	
0501-002080	Q801	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270	
0501-002080	Q802	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270	
0501-002080	Q803	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270	
0501-002080	Q804	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270	
0501-002080	Q805	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270	
0501-002080	Q806	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270	
0501-002080	Q807	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270	
0501-002080	Q900	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270	
0505-001170	IC801	FET-SILICON	SI9933ADY-T1,P,-20V,3.4A,0.06ohm,2W,SO-8	
0505-001170	IC802	FET-SILICON	SI9933ADY-T1,P,-20V,3.4A,0.06ohm,2W,SO-8	
0801-000397	IC904	IC-CMOS LOGIC	74HC04,INVERTER,SOP,14P,150MIL	
0801-000411	IC903	IC-CMOS LOGIC	74HC32,OR GATE,SOP,14P,150MIL,	
0801-000411	IC905	IC-CMOS LOGIC	74HC32,OR GATE,SOP,14P,150MIL,	
0801-000888	IC806	IC-CMOS LOGIC	74HCT04,INVERTER,SOP,14P,150MI	
0801-002267	IC101	IC-CMOS LOGIC	74LCX14,-,SOIC,14P,150MIL,-,TP,-,-,3.6V,-40TO+85C,-,5.5V,-,-,24MA	
0801-002268	IC906	IC-CMOS LOGIC	74VHC139,DECODER,SOP,16P,150MI	
0801-002709	IC902	IC-CMOS LOGIC	74HC373,D FLIP-FLOP,TSSOP,20P,173MIL,OCTAL,TP,PLASTIC,3-STATE,-,0V,-40TO+85C,600	
0903-001202	IC908	IC-MICROCONTROLLER	80251G2,8Bit,PLCC,44P,653MIL,24MHz,TR,CMOS,PLASTIC,5V,1.5W,0to+70C,1KBYTE,-,24Bi	SNA
1001-001082	IC206	IC-VIDEO SWITCH	BA7657F,-,SOP,24P,300MIL,SINGL	
1001-001109	IC204	IC-ANALOG SWITCH	FST3125M,BUS SWITCH & CMOS,SOIC,17P,150MIL,QUAD,7V,-40TO+85C,PLASTIC,-,4.0OHM,5.	
1003-001391	IC300	IC-DISPLAY DRIVER	FLI2200,QFP,176P,945MIL,-,-,TR,PLASTIC,5.5V,-40TO+85C,1.75W,-,DISPLAY SUPPORT	
1103-000138	IC907	IC-EEPROM	24C16,2Kx8BIT,SOP,8P,150MIL,10	
1103-001023	IC202	IC-EEPROM	524C80D81,1028x8Bit,SOP,8P,150MIL,10mS,5V,10%,PLASTIC,0to+70C,110uA,CMOS,TP	
1103-001164	IC100	IC-EEPROM	24LC21A,128X8BIT,SOP,8P,150MIL,-,5V,10%,PLASTIC,0 TO +70C,100UA,CMOS,TP	
1105-001391	IC302	IC-DRAM	EM638325,2MX32BIT,TSOP(II),86P,400MIL,60NS,3.3V,10%,PLASTIC,0TO+70C,3MA,-,TR	
1105-001391	IC500	IC-DRAM	EM638325,2MX32BIT,TSOP(II),86P,400MIL,60NS,3.3V,10%,PLASTIC,0TO+70C,3MA,-,TR	
1105-001391	IC502	IC-DRAM	EM638325,2MX32BIT,TSOP(II),86P,400MIL,60NS,3.3V,10%,PLASTIC,0TO+70C,3MA,-,TR	
1201-001495	IC704	IC-AUDIO AMP	7050,SOP,8P,150MIL,DUAL,26DB,PLASTIC,6V,0.25W,-,40DB,-,-,20NA,-	
1201-001681	IC702	IC-AUDIO AMP	1101,SOP,30P,433MIL,-,-,PLASTIC,13.2V,-,0to+70C,-,-,-,-,TP	
1203-001109	IC900	IC-VOL. DETECTOR	7045,SOT-89,3P,-,PLASTIC,4.3/4	
1203-001447	IC805	IC-POS1.FIXED REG.	2596,TO-263,5P,-,PLASTIC,3.135	
1203-001465	IC402	IC-POS1.ADJUST REG.	317,TO-263,3P,-,PLASTIC,1.2/37	
1203-001488	IC200	IC-POS1.FIXED REG.	7805,TO-252,3P,-,PLASTIC,4.8/5	
1203-001779	IC703	IC-POS1.FIXED REG.	7812,D2PAK,3P,-,PLASTIC,11.5/12.5V,-,-40TO+125CC,1A,-,TP	
1203-001816	IC701	IC-POS1.FIXED REG.	78M08,TO-252,3P,-,PLASTIC,7.7/8.3V,1.0W,-40TO+85C,0.5A,-,TP	

1203-001830	IC804	IC-SWITCH VOL. REG.	2676,TO-263,7P,-,PLASTIC,3.234/3.336V,-,-40TO+125C,3A,-,TP
1203-001831	IC803	IC-SWITCH VOL. REG.	2676,TO-263,7P,-,PLASTIC,4.900/5.100V,-,-40TO+125C,3A,-,TP
1203-002410	IC105	IC-POS1.ADJUST REG.	KA317MR,D-PAK,3P,240MIL,PLASTIC,40V,-,0TO+125C,0.5A,1.2/1.3V,TP
1203-002410	IC301	IC-POS1.ADJUST REG.	KA317MR,D-PAK,3P,240MIL,PLASTIC,40V,-,0TO+125C,0.5A,1.2/1.3V,TP
1203-002450	IC104	IC-VOLTAGE REGULATOR	MC33375ST-2.5T3,SOT-223,4P,137MIL,PLASTIC,2.475/2.525V,-,-40TO+125C,300MA,-,TP
1204-000292	IC103	IC-VIDEO SYSTEM	LM1881M,SOP,8P,150MIL,PLASTIC,
1204-001926	IC201	IC-VIDEO PROCESS	VPC3230D-C5,PQFP,80P,-,PLASTIC,6V,-,0 TO 65C,TP,VPC3230D-C5
1204-002007	IC700	IC-SOUND PROCESSOR	MSP3411G-QA-B8,PQFP,80P,20X14MM,PLASTIC,8.7V,1W,0TO+70C,TR,-
1205-001740	IC600	IC-TRANSMITTER	DS90C385,TSSOP,56P,240MIL,PLASTIC,4V,1.63W,-10 TO +70C,ST,FPD LINK-85MHZ(LVDS)
1205-002028	IC102	IC-LCD CONTROLLER	JAGASM,BGA,388P,208MIL,PALATIC,3.45V,2.5W,-40TO+125C,TR,DIGITAL DISPLAY PRO.
1205-002028	IC400	IC-LCD CONTROLLER	JAGASM,BGA,388P,208MIL,PALATIC,3.45V,2.5W,-40TO+125C,TR,DIGITAL DISPLAY PRO.
2007-000070	R146	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R149	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R150	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R193	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R194	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R195	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R231	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R250	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R251	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R259	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R260	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R261	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R262	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R266	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R269	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R306	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R307	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R311	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R313	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R314	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R315	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R316	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R318	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R334	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R335	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R336	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R501	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R507	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R600	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R601	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R602	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R603	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R604	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R702	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R705	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R710	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R725	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R747	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R748	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R813	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R814	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R833	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R866	R-CHIP	0ohm,5%,1/16W,DA,TP,1608
2007-000070	R901	R-CHIP	0ohm,5%,1/16W,DA,TP,1608

2007-000074	R712	R-CHIP	100ohm,5%,1/16W,DA,TP,1608
2007-000074	R713	R-CHIP	100ohm,5%,1/16W,DA,TP,1608
2007-000074	R714	R-CHIP	100ohm,5%,1/16W,DA,TP,1608
2007-000074	R715	R-CHIP	100ohm,5%,1/16W,DA,TP,1608
2007-000074	R716	R-CHIP	100ohm,5%,1/16W,DA,TP,1608
2007-000074	R718	R-CHIP	100ohm,5%,1/16W,DA,TP,1608
2007-000074	R722	R-CHIP	100ohm,5%,1/16W,DA,TP,1608
2007-000074	R723	R-CHIP	100ohm,5%,1/16W,DA,TP,1608
2007-000074	R724	R-CHIP	100ohm,5%,1/16W,DA,TP,1608
2007-000074	R753	R-CHIP	100ohm,5%,1/16W,DA,TP,1608
2007-000074	R834	R-CHIP	100ohm,5%,1/16W,DA,TP,1608
2007-000074	R836	R-CHIP	100ohm,5%,1/16W,DA,TP,1608
2007-000074	R838	R-CHIP	100ohm,5%,1/16W,DA,TP,1608
2007-000074	R839	R-CHIP	100ohm,5%,1/16W,DA,TP,1608
2007-000074	R844	R-CHIP	100ohm,5%,1/16W,DA,TP,1608
2007-000074	R845	R-CHIP	100ohm,5%,1/16W,DA,TP,1608
2007-000074	R850	R-CHIP	100ohm,5%,1/16W,DA,TP,1608
2007-000074	R852	R-CHIP	100ohm,5%,1/16W,DA,TP,1608
2007-000074	R853	R-CHIP	100ohm,5%,1/16W,DA,TP,1608
2007-000074	R927	R-CHIP	100ohm,5%,1/16W,DA,TP,1608
2007-000074	R928	R-CHIP	100ohm,5%,1/16W,DA,TP,1608
2007-000075	R900	R-CHIP	220ohm,5%,1/16W,DA,TP,1608
2007-000076	R233	R-CHIP	330ohm,5%,1/16W,DA,TP,1608
2007-000076	R235	R-CHIP	330ohm,5%,1/16W,DA,TP,1608
2007-000076	R750	R-CHIP	330ohm,5%,1/16W,DA,TP,1608
2007-000076	R751	R-CHIP	330ohm,5%,1/16W,DA,TP,1608
2007-000077	R177	R-CHIP	470ohm,5%,1/16W,DA,TP,1608
2007-000077	R178	R-CHIP	470ohm,5%,1/16W,DA,TP,1608
2007-000077	R323	R-CHIP	470ohm,5%,1/16W,DA,TP,1608
2007-000077	R324	R-CHIP	470ohm,5%,1/16W,DA,TP,1608
2007-000077	R439	R-CHIP	470ohm,5%,1/16W,DA,TP,1608
2007-000077	R440	R-CHIP	470ohm,5%,1/16W,DA,TP,1608
2007-000077	R806	R-CHIP	470ohm,5%,1/16W,DA,TP,1608
2007-000077	R807	R-CHIP	470ohm,5%,1/16W,DA,TP,1608
2007-000077	R832	R-CHIP	470ohm,5%,1/16W,DA,TP,1608
2007-000077	R840	R-CHIP	470ohm,5%,1/16W,DA,TP,1608
2007-000077	R841	R-CHIP	470ohm,5%,1/16W,DA,TP,1608
2007-000078	R118	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R198	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R210	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R219	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R234	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R236	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R273	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R277	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R282	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R498	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R726	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R805	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R808	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R809	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R810	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R811	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R842	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R843	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608

2007-000078	R851	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R925	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R926	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000080	R253	R-CHIP	2Kohm,5%,1/16W,DA,TP,1608
2007-000080	R254	R-CHIP	2Kohm,5%,1/16W,DA,TP,1608
2007-000080	R255	R-CHIP	2Kohm,5%,1/16W,DA,TP,1608
2007-000082	R122	R-CHIP	3.3Kohm,5%,1/16W,DA,TP,1608
2007-000084	R116	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R117	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R241	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R242	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R243	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R244	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R245	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R246	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R741	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R742	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R749	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R800	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R801	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R802	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R803	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R827	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R829	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R831	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R904	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R910	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R930	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R931	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R932	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R933	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R934	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R935	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R936	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R937	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000088	R100	R-CHIP	7.5Kohm,5%,1/16W,DA,TP,1608
2007-000090	R108	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R134	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R145	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R168	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R237	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R300	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R301	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R312	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R317	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R332	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R333	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R406	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R420	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R500	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R502	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R506	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R508	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R743	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R744	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608

2007-000090	R745	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R746	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R812	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R820	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R822	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R823	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R826	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R828	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R830	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R846	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R847	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R902	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R909	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R924	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R929	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000092	R201	R-CHIP	15Kohm,5%,1/16W,DA,TP,1608
2007-000092	R903	R-CHIP	15Kohm,5%,1/16W,DA,TP,1608
2007-000093	R238	R-CHIP	20Kohm,5%,1/16W,DA,TP,1608
2007-000093	R730	R-CHIP	20Kohm,5%,1/16W,DA,TP,1608
2007-000093	R731	R-CHIP	20Kohm,5%,1/16W,DA,TP,1608
2007-000094	R203	R-CHIP	22Kohm,5%,1/16W,DA,TP,1608
2007-000098	R717	R-CHIP	56Kohm,5%,1/16W,DA,TP,1608
2007-000098	R719	R-CHIP	56Kohm,5%,1/16W,DA,TP,1608
2007-000098	R848	R-CHIP	56Kohm,5%,1/16W,DA,TP,1608
2007-000098	R849	R-CHIP	56Kohm,5%,1/16W,DA,TP,1608
2007-000102	R110	R-CHIP	100Kohm,5%,1/16W,DA,TP,1608
2007-000102	R819	R-CHIP	100Kohm,5%,1/16W,DA,TP,1608
2007-000102	R821	R-CHIP	100Kohm,5%,1/16W,DA,TP,1608
2007-000102	R824	R-CHIP	100Kohm,5%,1/16W,DA,TP,1608
2007-000102	R825	R-CHIP	100Kohm,5%,1/16W,DA,TP,1608
2007-000102	R835	R-CHIP	100Kohm,5%,1/16W,DA,TP,1608
2007-000102	R837	R-CHIP	100Kohm,5%,1/16W,DA,TP,1608
2007-000109	R733	R-CHIP	1Mohm,5%,1/16W,DA,TP,1608
2007-000116	R190	R-CHIP	120ohm,5%,1/16W,DA,TP,1608
2007-000119	R107	R-CHIP	560ohm,5%,1/16W,DA,TP,1608
2007-000124	R905	R-CHIP	2.2Kohm,5%,1/16W,DA,TP,1608
2007-000124	R906	R-CHIP	2.2Kohm,5%,1/16W,DA,TP,1608
2007-000124	R907	R-CHIP	2.2Kohm,5%,1/16W,DA,TP,1608
2007-000124	R908	R-CHIP	2.2Kohm,5%,1/16W,DA,TP,1608
2007-000124	R939	R-CHIP	2.2Kohm,5%,1/16W,DA,TP,1608
2007-000125	R103	R-CHIP	3.9Kohm,5%,1/16W,DA,TP,1608
2007-000132	R101	R-CHIP	180Kohm,5%,1/16W,DA,TP,1608
2007-000132	R102	R-CHIP	180Kohm,5%,1/16W,DA,TP,1608
2007-000308	R734	R-CHIP	100HM,5%,1/10W,DA,TP,2012
2007-000308	R735	R-CHIP	100HM,5%,1/10W,DA,TP,2012
2007-000309	R113	R-CHIP	10ohm,5%,1/16W,DA,TP,1608
2007-000309	R192	R-CHIP	10ohm,5%,1/16W,DA,TP,1608
2007-000458	R729	R-CHIP	18Kohm,5%,1/16W,DA,TP,1608
2007-000458	R732	R-CHIP	18Kohm,5%,1/16W,DA,TP,1608
2007-000518	R728	R-CHIP	2.7KOHM,5%,1/10W,DA,TP,2012
2007-000616	R256	R-CHIP	24Kohm,5%,1/16W,DA,TP,1608
2007-000819	R191	R-CHIP	390Kohm,5%,1/16W,DA,TP,1608
2007-000947	R605	R-CHIP	470HM,5%,1/10W,DA,TP,2012
2007-000947	R606	R-CHIP	470HM,5%,1/10W,DA,TP,2012
2007-000947	R607	R-CHIP	470HM,5%,1/10W,DA,TP,2012

2007-000947	R608	R-CHIP	470HM,5%,1/10W,DA,TP,2012
2007-000947	R609	R-CHIP	470HM,5%,1/10W,DA,TP,2012
2007-000947	R610	R-CHIP	470HM,5%,1/10W,DA,TP,2012
2007-000947	R611	R-CHIP	470HM,5%,1/10W,DA,TP,2012
2007-000947	R612	R-CHIP	470HM,5%,1/10W,DA,TP,2012
2007-000947	R613	R-CHIP	470HM,5%,1/10W,DA,TP,2012
2007-000947	R614	R-CHIP	470HM,5%,1/10W,DA,TP,2012
2007-000981	R727	R-CHIP	5.6KOHM,5%,1/10W,DA,TP,2012
2007-001044	R123	R-CHIP	56ohm,5%,1/16W,DA,TP,1608
2007-001167	R127	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R128	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R129	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R205	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R206	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R208	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R211	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R212	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R257	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R258	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R272	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R274	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R278	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R283	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R285	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R286	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R289	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R290	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R292	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R294	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R854	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R855	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R856	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2011-000002	RA100	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA101	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA102	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA103	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA104	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA105	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA106	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA107	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA200	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA201	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA202	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA203	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA300	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA301	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA302	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA303	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA400	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA401	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA402	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA403	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA404	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA405	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA406	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP

2203-000257	C822	C-CERAMIC,CHIP	10nF,10%,50V,X7R,TP,1608
2203-000257	C825	C-CERAMIC,CHIP	10nF,10%,50V,X7R,TP,1608
2203-000257	C830	C-CERAMIC,CHIP	10nF,10%,50V,X7R,TP,1608
2203-000257	C859	C-CERAMIC,CHIP	10nF,10%,50V,X7R,TP,1608
2203-000257	C904	C-CERAMIC,CHIP	10nF,10%,50V,X7R,TP,1608
2203-000257	U384	C-CERAMIC,CHIP	10nF,10%,50V,X7R,TP,1608
2203-000257	U385	C-CERAMIC,CHIP	10nF,10%,50V,X7R,TP,1608
2203-000280	C258	C-CERAMIC,CHIP	0.01nF,0.5pF,50V,NP0,TP,1608
2203-000280	C259	C-CERAMIC,CHIP	0.01nF,0.5pF,50V,NP0,TP,1608
2203-000384	C148	C-CERAMIC,CHIP	0.015nF,5%,50V,NP0,TP,1608
2203-000440	C109	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000440	C115	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000440	C118	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000440	C121	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000440	C233	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000440	C235	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000440	C401	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000440	C404	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000440	C614	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000440	C616	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000440	C617	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000440	C621	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000440	C622	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000440	C623	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000440	C723	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000440	C724	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000440	C860	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000440	C861	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000491	C261	C-CERAMIC,CHIP	2.2nF,10%,50V,X7R,TP,1608,-
2203-000697	C103	C-CERAMIC,CHIP	0.002nF,0.25pF,50V,NP0,TP,1608
2203-000697	C104	C-CERAMIC,CHIP	0.002nF,0.25pF,50V,NP0,TP,1608
2203-000697	C105	C-CERAMIC,CHIP	0.002nF,0.25pF,50V,NP0,TP,1608
2203-000701	C709	C-CERAMIC,CHIP	0.002nF,0.25pF,50V,NP0,TP,2012
2203-000701	C710	C-CERAMIC,CHIP	0.002nF,0.25pF,50V,NP0,TP,2012
2203-000716	C719	C-CERAMIC,CHIP	3.3nF,10%,50V,X7R,TP,2012,-
2203-000716	C720	C-CERAMIC,CHIP	3.3nF,10%,50V,X7R,TP,2012,-
2203-000784	C772	C-CERAMIC,CHIP	0.33nF,5%,50V,NP0,TP,2012
2203-000784	C774	C-CERAMIC,CHIP	0.33nF,5%,50V,NP0,TP,2012
2203-000784	C777	C-CERAMIC,CHIP	0.33nF,5%,50V,NP0,TP,2012
2203-000784	C835	C-CERAMIC,CHIP	0.33nF,5%,50V,NP0,TP,2012
2203-000784	C837	C-CERAMIC,CHIP	0.33nF,5%,50V,NP0,TP,2012
2203-000784	C843	C-CERAMIC,CHIP	0.33nF,5%,50V,NP0,TP,2012
2203-000784	C845	C-CERAMIC,CHIP	0.33nF,5%,50V,NP0,TP,2012
2203-000815	C906	C-CERAMIC,CHIP	0.033nF,5%,50V,NP0,TP,1608
2203-000815	C907	C-CERAMIC,CHIP	0.033nF,5%,50V,NP0,TP,1608
2203-000838	C214	C-CERAMIC,CHIP	0.39nF,5%,50V,NP0,TP,1608
2203-000838	C230	C-CERAMIC,CHIP	0.39nF,5%,50V,NP0,TP,1608
2203-000903	C603	C-CERAMIC,CHIP	0.0047nF,0.25pF,50V,NP0,TP,1608
2203-000903	C604	C-CERAMIC,CHIP	0.0047nF,0.25pF,50V,NP0,TP,1608
2203-000903	C605	C-CERAMIC,CHIP	0.0047nF,0.25pF,50V,NP0,TP,1608
2203-000903	C606	C-CERAMIC,CHIP	0.0047nF,0.25pF,50V,NP0,TP,1608
2203-000903	C607	C-CERAMIC,CHIP	0.0047nF,0.25pF,50V,NP0,TP,1608
2203-000903	C608	C-CERAMIC,CHIP	0.0047nF,0.25pF,50V,NP0,TP,1608
2203-000903	C609	C-CERAMIC,CHIP	0.0047nF,0.25pF,50V,NP0,TP,1608
2203-000903	C610	C-CERAMIC,CHIP	0.0047nF,0.25pF,50V,NP0,TP,1608

2203-000903	C611	C-CERAMIC,CHIP	0.0047nF,0.25pF,50V,NP0,TP,1608
2203-000903	C612	C-CERAMIC,CHIP	0.0047nF,0.25pF,50V,NP0,TP,1608
2203-000903	C708	C-CERAMIC,CHIP	0.0047nF,0.25pF,50V,NP0,TP,1608
2203-000903	C711	C-CERAMIC,CHIP	0.0047nF,0.25pF,50V,NP0,TP,1608
2203-000972	C206	C-CERAMIC,CHIP	47nF,10%,16V,X7R,TP,1608
2203-000972	C216	C-CERAMIC,CHIP	47nF,10%,16V,X7R,TP,1608
2203-000972	C252	C-CERAMIC,CHIP	47nF,10%,16V,X7R,TP,1608
2203-000972	C257	C-CERAMIC,CHIP	47nF,10%,16V,X7R,TP,1608
2203-000972	C713	C-CERAMIC,CHIP	47nF,10%,16V,X7R,TP,1608
2203-000998	C295	C-CERAMIC,CHIP	0.047nF,5%,50V,NP0,TP,1608
2203-001077	C242	C-CERAMIC,CHIP	0.056nF,5%,50V,NP0,TP,2012
2203-001077	C243	C-CERAMIC,CHIP	0.056nF,5%,50V,NP0,TP,2012
2203-001077	C700	C-CERAMIC,CHIP	0.056nF,5%,50V,NP0,TP,2012
2203-001077	C706	C-CERAMIC,CHIP	0.056nF,5%,50V,NP0,TP,2012
2203-001077	C707	C-CERAMIC,CHIP	0.056nF,5%,50V,NP0,TP,2012
2203-001077	C853	C-CERAMIC,CHIP	0.056nF,5%,50V,NP0,TP,2012
2203-001077	C854	C-CERAMIC,CHIP	0.056nF,5%,50V,NP0,TP,2012
2203-001140	C253	C-CERAMIC,CHIP	68nF,10%,16V,X7R,TP,1608,-
2203-001140	C254	C-CERAMIC,CHIP	68nF,10%,16V,X7R,TP,1608,-
2203-001140	C255	C-CERAMIC,CHIP	68nF,10%,16V,X7R,TP,1608,-
2203-001158	C151	C-CERAMIC,CHIP	0.068nF,5%,50V,NP0,TP,2012
2203-001158	C152	C-CERAMIC,CHIP	0.068nF,5%,50V,NP0,TP,2012
2203-001391	C741	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C742	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C743	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C745	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C746	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C747	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C748	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C749	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C750	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C751	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C752	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C753	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C754	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C756	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001402	C212	C-CERAMIC,CHIP	220nF,+80-20%,16V,Y5V,TP,1608
2203-001402	C220	C-CERAMIC,CHIP	220nF,+80-20%,16V,Y5V,TP,1608
2203-001402	C221	C-CERAMIC,CHIP	220nF,+80-20%,16V,Y5V,TP,1608
2203-001402	C222	C-CERAMIC,CHIP	220nF,+80-20%,16V,Y5V,TP,1608
2203-001402	C232	C-CERAMIC,CHIP	220nF,+80-20%,16V,Y5V,TP,1608
2203-001402	C804	C-CERAMIC,CHIP	220nF,+80-20%,16V,Y5V,TP,1608
2203-001402	C805	C-CERAMIC,CHIP	220nF,+80-20%,16V,Y5V,TP,1608
2203-001607	C717	C-CERAMIC,CHIP	0.22nF,5%,50V,NP0,TP,1608
2203-001630	C262	C-CERAMIC,CHIP	330nF,+80-20%,16V,Y5V,TP,1608
2203-001656	C705	C-CERAMIC,CHIP	0.47nF,5%,50V,NP0,TP,1608
2203-001656	C715	C-CERAMIC,CHIP	0.47nF,5%,50V,NP0,TP,1608
2203-001656	C728	C-CERAMIC,CHIP	0.47nF,5%,50V,NP0,TP,1608
2203-002793	C245	C-CERAMIC,CHIP	1000nF,+80-20%,25V,Y5V,TP,2012
2203-002793	C405	C-CERAMIC,CHIP	1000nF,+80-20%,25V,Y5V,TP,2012
2203-002793	C421	C-CERAMIC,CHIP	1000nF,+80-20%,25V,Y5V,TP,2012
2203-002793	C739	C-CERAMIC,CHIP	1000nF,+80-20%,25V,Y5V,TP,2012
2203-005005	C170	C-CERAMIC,CHIP	100nF,10%,16V,X7R,TP,1608
2203-005005	C195	C-CERAMIC,CHIP	100nF,10%,16V,X7R,TP,1608
2203-005005	C419	C-CERAMIC,CHIP	100nF,10%,16V,X7R,TP,1608

2203-005005	C901	C-CERAMIC,CHIP	100nF,10%,16V,X7R,TP,1608
2203-005065	C101	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C102	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C106	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C107	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C108	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C112	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C113	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C119	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C120	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C124	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C127	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C128	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C130	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C131	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C138	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C139	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C141	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C142	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C146	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C147	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C153	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C154	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C194	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005189	C207	C-CERAMIC,CHIP	680nF,+80-20%,16V,Y5V,TP,2012,
2203-005189	C208	C-CERAMIC,CHIP	680nF,+80-20%,16V,Y5V,TP,2012,
2203-005189	C209	C-CERAMIC,CHIP	680nF,+80-20%,16V,Y5V,TP,2012,
2203-005189	C210	C-CERAMIC,CHIP	680nF,+80-20%,16V,Y5V,TP,2012,
2203-005189	C211	C-CERAMIC,CHIP	680nF,+80-20%,16V,Y5V,TP,2012,
2203-005189	C721	C-CERAMIC,CHIP	680nF,+80-20%,16V,Y5V,TP,2012,
2203-005189	C722	C-CERAMIC,CHIP	680nF,+80-20%,16V,Y5V,TP,2012,
2402-000108	C173	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C203	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C300	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C303	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C305	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C310	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C402	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C420	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C601	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C613	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C615	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C618	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C620	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C701	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C703	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C716	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C727	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C731	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C814	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C852	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C902	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C903	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000176	C117	C-AL,SMD	10uF,20%,16V,GP,TP,4.3x4.3x5.4
2402-000176	C134	C-AL,SMD	10uF,20%,16V,GP,TP,4.3x4.3x5.4

2402-000176	C169	C-AL, SMD	10uF, 20%, 16V, GP, TP, 4.3x4.3x5.4
2402-000176	C179	C-AL, SMD	10uF, 20%, 16V, GP, TP, 4.3x4.3x5.4
2402-000176	C190	C-AL, SMD	10uF, 20%, 16V, GP, TP, 4.3x4.3x5.4
2402-000176	C191	C-AL, SMD	10uF, 20%, 16V, GP, TP, 4.3x4.3x5.4
2402-000176	C260	C-AL, SMD	10uF, 20%, 16V, GP, TP, 4.3x4.3x5.4
2402-000176	C264	C-AL, SMD	10uF, 20%, 16V, GP, TP, 4.3x4.3x5.4
2402-000176	C266	C-AL, SMD	10uF, 20%, 16V, GP, TP, 4.3x4.3x5.4
2402-000176	C268	C-AL, SMD	10uF, 20%, 16V, GP, TP, 4.3x4.3x5.4
2402-000176	C274	C-AL, SMD	10uF, 20%, 16V, GP, TP, 4.3x4.3x5.4
2402-000176	C276	C-AL, SMD	10uF, 20%, 16V, GP, TP, 4.3x4.3x5.4
2402-000176	C278	C-AL, SMD	10uF, 20%, 16V, GP, TP, 4.3x4.3x5.4
2402-000176	C290	C-AL, SMD	10uF, 20%, 16V, GP, TP, 4.3x4.3x5.4
2402-000176	C434	C-AL, SMD	10uF, 20%, 16V, GP, TP, 4.3x4.3x5.4
2402-000176	C735	C-AL, SMD	10uF, 20%, 16V, GP, TP, 4.3x4.3x5.4
2402-000176	U383	C-AL, SMD	10uF, 20%, 16V, GP, TP, 4.3x4.3x5.4
2402-000176	U389	C-AL, SMD	10uF, 20%, 16V, GP, TP, 4.3x4.3x5.4
2402-000179	C175	C-AL, SMD	47uF, 20%, 16V, GP, TP, 6.6x6.6x5.4
2402-000179	C202	C-AL, SMD	47uF, 20%, 16V, GP, TP, 6.6x6.6x5.4
2402-000209	C500	C-AL, SMD	22uF, 20%, 16V, WT, TP, 5.3x5.3mm, 1
2402-000209	C526	C-AL, SMD	22uF, 20%, 16V, WT, TP, 5.3x5.3mm, 1
2402-000209	C841	C-AL, SMD	22uF, 20%, 16V, WT, TP, 5.3x5.3mm, 1
2402-000209	C842	C-AL, SMD	22uF, 20%, 16V, WT, TP, 5.3x5.3mm, 1
2402-001006	C767	C-AL, SMD	4.7uF, 20%, 25V, GP, TP, 3.6x6.3x3.
2402-001006	C769	C-AL, SMD	4.7uF, 20%, 25V, GP, TP, 3.6x6.3x3.
2402-001006	C771	C-AL, SMD	4.7uF, 20%, 25V, GP, TP, 3.6x6.3x3.
2402-001006	C773	C-AL, SMD	4.7uF, 20%, 25V, GP, TP, 3.6x6.3x3.
2402-001006	C776	C-AL, SMD	4.7uF, 20%, 25V, GP, TP, 3.6x6.3x3.
2402-001006	C836	C-AL, SMD	4.7uF, 20%, 25V, GP, TP, 3.6x6.3x3.
2402-001006	C838	C-AL, SMD	4.7uF, 20%, 25V, GP, TP, 3.6x6.3x3.
2402-001006	C844	C-AL, SMD	4.7uF, 20%, 25V, GP, TP, 3.6x6.3x3.
2402-001006	C846	C-AL, SMD	4.7uF, 20%, 25V, GP, TP, 3.6x6.3x3.
2402-001042	C730	C-AL, SMD	100uF, 20%, 16V, GP, TP, 6.6x6.6x5.4mm
2402-001086	C177	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C758	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C759	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C760	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C764	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C765	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C766	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C813	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C817	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C818	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C821	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C823	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C827	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C828	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C832	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C833	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C855	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C857	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001155	C200	C-AL, SMD	47UF, 20%, 16V, WT, TP, 6.3X5.2MM
2402-001155	C205	C-AL, SMD	47UF, 20%, 16V, WT, TP, 6.3X5.2MM
2402-001155	C215	C-AL, SMD	47UF, 20%, 16V, WT, TP, 6.3X5.2MM
2402-001157	C725	C-AL, SMD	0.33UF, 20%, 50V, GP, TP, 4X5.2MM
2402-001157	C726	C-AL, SMD	0.33UF, 20%, 50V, GP, TP, 4X5.2MM

2402-001158	C738	C-AL, SMD	1UF, 20%, 50V, WT, TP, 4X5.2MM	
2402-001158	C811	C-AL, SMD	1UF, 20%, 50V, WT, TP, 4X5.2MM	
2402-001158	C812	C-AL, SMD	1UF, 20%, 50V, WT, TP, 4X5.2MM	
2402-001158	C815	C-AL, SMD	1UF, 20%, 50V, WT, TP, 4X5.2MM	
2402-001158	C816	C-AL, SMD	1UF, 20%, 50V, WT, TP, 4X5.2MM	
2402-001159	C732	C-AL, SMD	3.3UF, 20%, 50V, WT, TP, 4X5.2MM	
2409-001035	C150	C-ORGANIC	10uF, 20%, 10V, LZ, TP, 5.4x4.3x4.3mm, 1	
2409-001035	U386	C-ORGANIC	10uF, 20%, 10V, LZ, TP, 5.4x4.3x4.3mm, 1	
2409-001035	U387	C-ORGANIC	10uF, 20%, 10V, LZ, TP, 5.4x4.3x4.3mm, 1	
2503-001018	CA100	C-NETWORK	15PFX4, 10%, 50V, -	
2503-001018	CA101	C-NETWORK	15PFX4, 10%, 50V, -	
2503-001018	CA102	C-NETWORK	15PFX4, 10%, 50V, -	
2503-001018	CA103	C-NETWORK	15PFX4, 10%, 50V, -	
2503-001018	CA104	C-NETWORK	15PFX4, 10%, 50V, -	
2503-001018	CA105	C-NETWORK	15PFX4, 10%, 50V, -	
2503-001018	CA300	C-NETWORK	15PFX4, 10%, 50V, -	
2503-001018	CA301	C-NETWORK	15PFX4, 10%, 50V, -	
2503-001018	CA302	C-NETWORK	15PFX4, 10%, 50V, -	
2503-001018	CA303	C-NETWORK	15PFX4, 10%, 50V, -	
2503-001018	CA600	C-NETWORK	15PFX4, 10%, 50V, -	
2503-001018	CA601	C-NETWORK	15PFX4, 10%, 50V, -	
2503-001018	CA602	C-NETWORK	15PFX4, 10%, 50V, -	
2503-001018	CA603	C-NETWORK	15PFX4, 10%, 50V, -	
2503-001018	CA604	C-NETWORK	15PFX4, 10%, 50V, -	
2503-001018	CA605	C-NETWORK	15PFX4, 10%, 50V, -	
2703-000271	BD208	INDUCTOR-SMD	4.7uH, 10%, 2x1.25x1.25mm	
2703-000271	BD209	INDUCTOR-SMD	4.7uH, 10%, 2x1.25x1.25mm	
2703-000271	BD211	INDUCTOR-SMD	4.7uH, 10%, 2x1.25x1.25mm	
2703-000442	BD212	INDUCTOR-SMD	10UH, 10%, 2X1.25X1.25MM	
2703-000442	BD213	INDUCTOR-SMD	10UH, 10%, 2X1.25X1.25MM	
2703-001070	L201	INDUCTOR-SMD	100uH, 10%, 4.5x3.2x3.2mm	
2703-001778	L100	INDUCTOR-SMD	3.3UH, 20%, 3.2X2.5X2.2MM	
2703-001778	L101	INDUCTOR-SMD	3.3UH, 20%, 3.2X2.5X2.2MM	
2703-001778	L200	INDUCTOR-SMD	3.3UH, 20%, 3.2X2.5X2.2MM	
2703-001778	L700	INDUCTOR-SMD	3.3UH, 20%, 3.2X2.5X2.2MM	
2703-001778	L701	INDUCTOR-SMD	3.3UH, 20%, 3.2X2.5X2.2MM	
2801-003667	X900	CRYSTAL-SMD	14.3182MHZ, 50PPM, 28-AAN, 16, 500HM, TP	
2801-003773	X201	CRYSTAL-SMD	12MHZ, 30PPM, 28-AAN, 20PF, 500HM, TP	
2801-003843	X701	CRYSTAL-SMD	18.432MHz, 30ppm, 28-AAN, 20pF, 50ohm, TP	
2801-003846	X200	CRYSTAL-SMD	20.25MHz, 30ppm, 28-AAN, 20pF, 50ohm, TP	
2804-001474	X100	OSCILLATOR-CLOCK	14.31818MHZ, 100PPM, 30PF, TP, 3.3V, 15MA	
2901-001114	FT201	FILTER-EMI SMD	25VDC, 2.0ADC, -, 100nF, 3.2x1.6x1	
3301-001145	BD115	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	BD700	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	FT600	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	FT601	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	FT700	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	FT800	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	FT801	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	FT802	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	FT803	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	FT804	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	FT805	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	FT806	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	FT807	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA

3301-001145	FT808	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001163	BD100	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD101	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD102	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD104	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD105	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD106	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD107	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD108	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD109	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD200	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD201	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD202	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD203	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD204	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD205	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD206	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD207	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD300	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD400	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD401	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD402	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD600	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD601	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD602	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD800	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD801	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD802	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD803	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD804	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD805	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD806	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD807	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD808	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD812	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD813	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD900	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD901	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD902	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD903	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD904	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD905	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD906	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD907	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001236	BD111	CORE-FERRITE BEAD	AB, 60ohm, 1.6x0.8x0.8mm, 200mA, TP, H, 0.7ohm	
3301-001236	BD112	CORE-FERRITE BEAD	AB, 60ohm, 1.6x0.8x0.8mm, 200mA, TP, H, 0.7ohm	
3301-001236	BD113	CORE-FERRITE BEAD	AB, 60ohm, 1.6x0.8x0.8mm, 200mA, TP, H, 0.7ohm	
3711-000556	CN802	CONNECTOR-HEADER	BOX, 12P, 1R, 1.25mm, SMD-A, SN	SNA
3711-002046	CN804	CONNECTOR-HEADER	3WALL, 12P, 1R, 1.25mm, SMD-S, SN	SNA
3711-002049	CN805	CONNECTOR-HEADER	BOX, 6P, 1R, 1.25mm, SMD-A, SN	SNA
3711-002049	CN900	CONNECTOR-HEADER	BOX, 6P, 1R, 1.25mm, SMD-A, SN	SNA
3711-002127	CN800	CONNECTOR-HEADER	BOX, 8P, 1R, 1.25mm, SMD-A, SN	SNA
3711-003161	CN600	CONNECTOR-HEADER	BOX, 20P, 1R, 1.25mm, ANGLE, SN	SNA
BN27-00007A	L702	COIL CHOKE-SMD	DHB0504-100, RB15/17NS, 10UH, ±10%, -, 0.080HM, 1.5A, DR5.8X4.5, 20.5TS, 6.0X5.2X4.5MM, -	
BN27-00007A	L703	COIL CHOKE-SMD	DHB0504-100, RB15/17NS, 10UH, ±10%, -, 0.080HM, 1.5A, DR5.8X4.5, 20.5TS, 6.0X5.2X4.5MM, -	

BN27-00007A	L704	COIL CHOKE-SMD	DHB0504-100, RB15/17NS, 10UH, ±10%, -, 0.080HM, 1.5A, DR5.8X4.5, 20.5TS, 6.0X5.2X4.5MM, -	
BN27-00007A	L705	COIL CHOKE-SMD	DHB0504-100, RB15/17NS, 10UH, ±10%, -, 0.080HM, 1.5A, DR5.8X4.5, 20.5TS, 6.0X5.2X4.5MM, -	
BN27-00009A	L803	COIL CHOKE	SMD 12X12X6, EOS, 33UH, 15%, -, 0.12 MAX, 2A, DR10X5.0MM, 18.5TS, 12X12X6, 1.8MM, 1UEW 0.	
BN27-20001A	L804	COIL-CHOKE	-, 53.0UH, 20%, DR10*5, -, -, -, -, 0.18ohm, -, -, -, TRAY	
BN27-20001A	L805	COIL-CHOKE	-, 53.0UH, 20%, DR10*5, -, -, -, -, 0.18ohm, -, -, -, TRAY	
BN41-00115A	MP1.0	PCB MAIN	ES15AS, FR4, 6L, -, -, 228X157X1.6, ES15AS, -, -, -	SNA
BN91-00305A	-	ASSY MISC-ADAPTOR	CS15MOA	SNA
BN44-00058A	CIS	ADAPTOR	PSCV420106A(AD-4214N, GH17PS, 100 TO 240 VAC, 47 - 63 HZ, +14VDC, 3A, -, 42W, AC-DC, 0 T	
BN92-00264A	-	ASSY BOX	ES15AS, -, -, -	SNA
BH75-10529A	CIS	UNIT-HANDLE PACKING	LXA410TLMU, PE, -, WHITE, -	SNA
BN72-60001A	CIS	LEVER TOP	LSD210TL, PE-LD, WHITE, TFT_LCD	SNA
BN72-60002A	CIS	LEVER BOTTOM	LSD210TL, PE-LD, WHITE, TFT-LCD	SNA
BN68-00135A	CIS	LABEL BAR CODE	-, ALL, MPRII, DOM, ART-PAPER 90G, -, WHT, BLACK, -, -, -	SNA
BN69-00254B	CIS	BOX	LW15E23C, GUJU, CB-SW4, YEL, A-1, -, -, -, L545*W453*H235, -	SNA
BN92-00265A	-	ASSY LABEL	ES15AS	SNA
0203-001159	CIS	TAPE-FILAMENT	#8915, TO.15, W12, L55000, CLR	SNA
BN68-00233B	CIS	LABEL RATING	ES15AS, EDC, PE, TO.05, 90, 45, SYNC, -, PE NATURE, -, -	SNA
BN92-00267A	-	ASSY P/MATERIAL	ES17SO	SNA
0203-001100	CIS	TAPE-OPP MASKING	OPP/W75/CLR, TO.05, W75, L800000, CLR	SNA
BH69-00457B	CIS	PACKING-PAD	GH15, FOAM, T3.0, 930, 1000	SNA
BH69-30355E	CIS	BAG-PE/N	NK15, PE FOAM, 0.5, 650, 650, NTR	SNA
BH69-40321C	CIS	PACKING-EDGE	SW4/YEL, 2030*140, -, CGC5637 (HP)	SNA
BH69-40378A	CIS	PACKING-PALLET	WOOD, 1300*1120*120, 13500, CGE71	SNA
BH69-40379A	CIS	PACKING-WRAP	LDPE, W500*TO.02, -, -	SNA
BN68-00129A	CIS	LABEL SHIPPING	-, LABEL SHIPPING, ART-PAPER, 100G, -, WHT, BLACK, -, -, -	SNA
BN69-00140T	CIS	PAD-PALLET COVER	SUN(LSA810), SW, 900, 3760, -, -, -, -, -	SNA
BN69-00230A	CIS	CUSHION-L/R	EOS15, EPS 50, -, -, -, -, -, -	SNA
BN92-00416B	-	ASSY ACCESSORY	LW15E23CX/XEF	SNA
BN96-00050B	CIS	ASSY ACCESSORY	LW15E23CX/XEF	SNA
0203-000214	CIS	TAPE-OPP MASKING	OPP/W50/CLR, TO.05, W50, L400000,	SNA
4301-000121	CIS	BATTERY-MN	1.5V, -, AAA, 10.5x44.5mm, HOLDER	SNA
6801-001009	CIS	CARD-WARRANTY	EUROPE (12), 8	SNA
6801-001016	CIS	CARD-REGISTRATION	XEF, FRENCH, MOJ0100, L150, W392, -, -	SNA
BH39-10339H	CIS	CBF POWER CORD	DET, H05VV-F, 250V/10, 16A, BLK, 25	
BH59-00179A	CIS	S/W DRIVER-2.6	ALL, NATURA-COLOR, ALL, -	SNA
BH68-00297G	CIS	MANUAL-ETC-00	WIN2000, SAMSUNG, English, W/W, MIMOJ080G, -, 148, 210, -, -, -, -	SNA
BH69-30348D	CIS	BAG-PE	LDPE, TO.05, W240*L356, Y, -, CMG73	SNA
BN39-00043A	CIS	CBF SIGNAL	DETACHABLE, -, 15P/15P, -, -, -	
BN59-00217B	CIS	REMOCON	-, TM71, EOS, 40, GR20, SILVER C/T, PAL, -, -, -, -	
BN68-00235A	CIS	MANUAL USERS-06	LW-15E23C/LW-17E24C, SYNCMASTER, E/F/S/G/I/SW, EDC, MIMOJ080G, -, 148, 210, -, -, -, -	
EW-LW15E23CX/XEF	-	2	LTM150XH-L06	-
BN90-00195E	-	ASSY STAND	GH17LS	SNA
6001-000154	STD+C/R	SCREW-MACHINE	BH, +, M4, L8, NI PLT, SWRCH18A, FP, -	
BN75-00242A	CIS	UNIT-STAND	EOS 15AS/NS, -, ABS, -, SV-012P, -, SPRAY, -	
6003-000009	CIS	SCREW-TAPTITE	BH, +, B, M4, L16, ZPC(YEL), SWRCH18	SNA
6003-001010	CIS	SCREW-TAPTITE	FH, +, B, M3, L6, ZPC(YEL), SWRCH18A	
6003-001315	CIS	SCREW-TAPTITE	BH, +, B, M4, L20, ZPC(YEL), SWRCH18A	SNA
BH73-60339A	CIS	RUBBER-LEG	SLC1400, EVA, GRAY, 65HB, DIA13*H2	SNA
BN61-00159A	CIS	FRAME-STAND BASE	EOS/NIKE, EG1, T1.2	SNA
BN61-00184A	CIS	STAND-BASE	ES15AS, ABS PC, GR40, SV-012P	SNA
BN72-00254A	CIS	STAND-COVER REAR	EOS 15, ABS, HB, IV16, SPRAY	SNA
BN72-00257A	CIS	STAND FRONT	EOS 15, ABS, HB, 16, SPRAY	SNA
BN75-00211A	CIS	UNIT-HINGE	EOS15, -, SECC T2.0, -, -, -, -, -	SNA
BN90-00200A	-	ASSY COVER FRONT	ES15AS	SNA
6003-001319	C/F+C/R	SCREW-TAPTITE	BH, +, B, M3, L10, NI PLT, SWRCH18A, -	SNA

BN90-00018F	CIS	ASSY COVER FRONT	ES15AS,ABS HB,BRIGHT SILVER,SV-012P PAL	
6002-000129	CIS	SCREW-TAPPING	FH,+,2S,M3,L8,ZPC(BLK),SM20C	SNA
6003-000276	CIS	SCREW-TAPTITE	BH,+,B,M3,L10,ZPC(YEL),SWCH10	SNA
BN59-00214A	CIS	BOARD	CN17VS,FUNCTION KEY,-,-,-,-	SNA
BN59-00216A	CIS	PBA SUB	CN17VS,IR PBA SUB,-,-,-,-	SNA
BN59-00262A	CIS	SPEAKER SYSTEM	EOS/NIKE15,EOS/NIKE15-R,100X42,WIRE:530MM	SNA
BN59-00263A	CIS	SPEAKER SYSTEM	EOS/NIKE17,EOS/NIKE17-L,100X42,WIRE:240MM	SNA
BN64-00031A	CIS	BADGE-BRAND	RB15AS,AL,T1.4,6.3,40.1,-,SILIVER,-	SNA
BN64-00035A	CIS	KNOB-FUNCTION	EOS15,ABS,IV16,-,-,HB,SPRAY,-,-	SNA
BN64-00039A	CIS	GRILLE-SPEAKER	EOS15,ABS,T2.7,-,-,HB,IV16,SPRAY	SNA
BN67-00020A	CIS	LENS-LED	EOS15,ACRYL,CLEAR,-,-,-,-	
BN72-00258A	CIS	COVER FRONT	EOS15,ABS,HB,IV16,SPRAY	SNA
BN90-00201A	-	ASSY COVER REAR	ES15AS	SNA
BN75-00238A	CIS	UNIT-REAR	EOS 15,-,ABS,-,SV-012P,-,SPRAY,-	
BN70-00176A	CIS	BRACKET VESA	RB15AS,SECC,1	SNA
BN72-00259A	CIS	COVER-REAR	EOS15,ABS,IV16,-,-,HB,-,-,SPRAY	SNA
BN91-00221A	-	ASSY SHIELD	ES15AS	SNA
0203-001160	CIS	TAPE-FILAMENT	SCOTCH#8915,TO.16,W48,L55M,TRP	SNA
0203-001244	CIS	TAPE-AL FOIL	DK100-30-50,T40uM,W30,L50,SIL	SNA
6003-000117	SH/PCB+FU/HAR	SCREW-TAPTITE	BH,+,B,M3,L6,ZPC(YEL),SWRCH18A	SNA
6003-000276	C/F+AUD/PCB	SCREW-TAPTITE	BH,+,B,M3,L10,ZPC(YEL),SWCH10	SNA
6003-000276	C/F+B/GUIDE	SCREW-TAPTITE	BH,+,B,M3,L10,ZPC(YEL),SWCH10	SNA
6003-000276	C/F+SH/PCB	SCREW-TAPTITE	BH,+,B,M3,L10,ZPC(YEL),SWCH10	SNA
BN39-00202A	CIS	LEAD CONNECTOR-ASSY	EOS,UL2835#28,UL/CSA,12P,-,-,#28,SMH200-12,12505HS-12,BK,-,-,200MM,2835#28,SJ01-	
BN59-00215A	CIS	PBA SUB	CN17VS,AV PBA FUNCTION,-,-,-,-	
BN70-00192A	CIS	BRACKET-SUPPORT	RB15AS,SECC,0.8	SNA
BN91-00222A	-	ASSY CHASSIS	ES15AS	
BN94-00259A	-	ASSY PCB MAIN	ES15AS	SNA
0202-001044	CIS	SOLDER-WIRE.	S63S-W3.0,S63S,D3,63Sn/37Pb,-	SNA
0202-001046	CIS	SOLDER-WIRE FLUX	CF-110VH-2A,-,-,-,-	SNA
0202-001222	CIS	SOLDER-WIRE FLUX	RS-107,RS60-1.2AA,D1.2,SN60/PB40,-	SNA
0204-001095	CIS	THINNER	#4520,-,-,-	SNA
1204-001904	IC203	IC-PAL DECODER	SAA5264PS,SDIP,52P,600MIL,PLASTIC,3.6V,-,-20TO+70C,ST,IC-DECODER	
2003-000797	R299	R-METAL OXIDE(S)	8.2ohm,5%,3W,AA,TP,6x16mm	
2201-000119	CIS	C-CERAMIC,DISC	100nF,+80-20%,50V,Y5V,TP,8x3.5	
2401-002286	C848	C-AL	470uF,20%,16V,WT,TP,10x12.5,5	
2401-002286	C849	C-AL	470uF,20%,16V,WT,TP,10x12.5,5	
2409-001044	C806	C-ORGANIC	100UF,+20%,16V,WT,TP,8X10.5,5	
2701-000116	L802	INDUCTOR-AXIAL	10uH,10%,4.2x9.8mm	
2701-000146	BD810	INDUCTOR-AXIAL	2.2uH,10%,2.5x3.4mm	
2701-000146	BD811	INDUCTOR-AXIAL	2.2uH,10%,2.5x3.4mm	
3701-001219	CN100	CONNECTOR-DSUB	15P,3R,FEMALE,ANGLE,AUF	
3704-000255	IC901 SOCK	SOCKET-IC	32P,DIP,SN,2.54mm	
3711-004270	CN700	CONNECTOR-HEADER	BOX,2P,1R,2MM,ANGLE,SN	SNA
3711-004386	CN701	CONNECTOR-HEADER	BOX,3P,1R,2mm,ANGLE,SN	SNA
3722-000117	CN801	JACK-DC POWER	3P,3.5MM,AG,BLK,NO	SNA
3722-000183	CN200	JACK-SCART	21P,4mm,SN,BLK,NO	
3722-001055	CN803	JACK-PHONE	5P/2C,3.6PI,AG,BLK,#16-22	
6003-000117	IN/PCB+SH/PCB	SCREW-TAPTITE	BH,+,B,M3,L6,ZPC(YEL),SWRCH18A	SNA
6003-000117	M/PCB+SH/PCB	SCREW-TAPTITE	BH,+,B,M3,L6,ZPC(YEL),SWRCH18A	SNA
6003-000117	SH/PCB+SH/D_SUB	SCREW-TAPTITE	BH,+,B,M3,L6,ZPC(YEL),SWRCH18A	SNA
BN39-00047A	CIS	CBF-HARNESS	100MM,100MM,BLU/WHT/GRY,UL1061,AWG28,51021-1200	
BN39-00201A	CIS	LEAD CONNECTOR-ASSY	ES15AS,UL2835#28,UL/CSA,6P,-,-,#28,12505HS-06,12505HS-06,BK,-,-,170MM,2835#28,SJ	
BN39-00204A	CIS	LEAD CONNECTOR-ASSY	ES15AS,UL2835#28,UL/CSA,20P,#30,12507HS-20,12507HS-20,BK,130MM,2835#28,SJ01-01-2	
BN40-00005A	CN806	RF MODULATOR-PAL	TCPQ9091PD27D,PAL,-,-,-,5V,-10TO+65C,50DB,55DB	

BN44-00056A	C1S	INVERTER	GOGH, SIC1542, 48KHZ, 12VDC, 1.5MARMS, 5.6MARMS, 48KHZ, 37*140*16.0, 4LAMP, 40 56KV, -, SIC	
BN83-00065A	U4	CKD-BN44-00056A	BN44-00056A, 1203-000560	SNA
BN83-00066A	U1	CKD-BN44-00056A	BN44-00056A, 1201-000471	SNA
BN83-00067A	U2	CKD-BN44-00056A	BN44-00056A, 1202-000104	SNA
BN83-00067A	U3	CKD-BN44-00056A	BN44-00056A, 1202-000104	SNA
BN83-00067A	U5	CKD-BN44-00056A	BN44-00056A, 1202-000104	SNA
BN83-00068A	Q2	CKD-BN44-00056A	BN44-00056A, 0504-000158	SNA
BN83-00069A	Q12	CKD-BN44-00056A	BN44-00056A, 0501-000457	SNA
BN83-00069A	Q5	CKD-BN44-00056A	BN44-00056A, 0501-000457	SNA
BN83-00070A	Q1	CKD-BN44-00056A	BN44-00056A, 0504-000129	SNA
BN83-00070A	Q10	CKD-BN44-00056A	BN44-00056A, 0504-000129	SNA
BN83-00070A	Q11	CKD-BN44-00056A	BN44-00056A, 0504-000129	SNA
BN83-00070A	Q16	CKD-BN44-00056A	BN44-00056A, 0504-000129	SNA
BN83-00070A	Q17	CKD-BN44-00056A	BN44-00056A, 0504-000129	SNA
BN83-00070A	Q18	CKD-BN44-00056A	BN44-00056A, 0504-000129	SNA
BN83-00070A	Q3	CKD-BN44-00056A	BN44-00056A, 0504-000129	SNA
BN83-00070A	Q4	CKD-BN44-00056A	BN44-00056A, 0504-000129	SNA
BN83-00070A	Q9	CKD-BN44-00056A	BN44-00056A, 0504-000129	SNA
BN83-00071A	Q23	CKD-BN44-00056A	BN44-00056A, 0501-000462	SNA
BN83-00071A	Q24	CKD-BN44-00056A	BN44-00056A, 0501-000462	SNA
BN83-00072A	Q13	CKD-BN44-00056A	BN44-00056A, 0505-001160	SNA
BN83-00072A	Q6	CKD-BN44-00056A	BN44-00056A, 0505-001160	SNA
BN83-00073A	Q14	CKD-BN44-00056A	BN44-00056A, 0501-002186	SNA
BN83-00073A	Q15	CKD-BN44-00056A	BN44-00056A, 0501-002186	SNA
BN83-00073A	Q7	CKD-BN44-00056A	BN44-00056A, 0501-002186	SNA
BN83-00073A	Q8	CKD-BN44-00056A	BN44-00056A, 0501-002186	SNA
BN83-00074A	D10	CKD-BN44-00056A	BN44-00056A, 0407-000114	SNA
BN83-00074A	D12	CKD-BN44-00056A	BN44-00056A, 0407-000114	SNA
BN83-00074A	D19	CKD-BN44-00056A	BN44-00056A, 0407-000114	SNA
BN83-00074A	D2	CKD-BN44-00056A	BN44-00056A, 0407-000114	SNA
BN83-00074A	D20	CKD-BN44-00056A	BN44-00056A, 0407-000114	SNA
BN83-00074A	D7	CKD-BN44-00056A	BN44-00056A, 0407-000114	SNA
BN83-00075A	D13	CKD-BN44-00056A	BN44-00056A, 0402-001110	SNA
BN83-00075A	D3	CKD-BN44-00056A	BN44-00056A, 0402-001110	SNA
BN83-00076A	D14	CKD-BN44-00056A	BN44-00056A, 0407-000122	SNA
BN83-00076A	D4	CKD-BN44-00056A	BN44-00056A, 0407-000122	SNA
BN83-00077A	D15	CKD-BN44-00056A	BN44-00056A, 0407-000116	SNA
BN83-00077A	D16	CKD-BN44-00056A	BN44-00056A, 0407-000116	SNA
BN83-00077A	D5	CKD-BN44-00056A	BN44-00056A, 0407-000116	SNA
BN83-00077A	D6	CKD-BN44-00056A	BN44-00056A, 0407-000116	SNA
BN83-00078A	C3	CKD-BN44-00056A	BN44-00056A, 2401-003400	SNA
BN83-00079A	C14	CKD-BN44-00056A	BN44-00056A, 2301-001336	SNA
BN83-00079A	C5	CKD-BN44-00056A	BN44-00056A, 2301-001336	SNA
BN83-00080A	C15	CKD-BN44-00056A	BN44-00056A, 2201-002122	SNA
BN83-00080A	C16	CKD-BN44-00056A	BN44-00056A, 2201-002122	SNA
BN83-00080A	C6	CKD-BN44-00056A	BN44-00056A, 2201-002122	SNA
BN83-00080A	C7	CKD-BN44-00056A	BN44-00056A, 2201-002122	SNA
BN83-00081A	C1	CKD-BN44-00056A	BN44-00056A, 2203-000206	SNA
BN83-00081A	C17	CKD-BN44-00056A	BN44-00056A, 2203-000206	SNA
BN83-00081A	C18	CKD-BN44-00056A	BN44-00056A, 2203-000206	SNA
BN83-00081A	C23	CKD-BN44-00056A	BN44-00056A, 2203-000206	SNA
BN83-00081A	C50	CKD-BN44-00056A	BN44-00056A, 2203-000206	SNA
BN83-00081A	C8	CKD-BN44-00056A	BN44-00056A, 2203-000206	SNA
BN83-00081A	C9	CKD-BN44-00056A	BN44-00056A, 2203-000206	SNA
BN83-00082A	C12	CKD-BN44-00056A	BN44-00056A, 2203-001458	SNA

BN83-00082A	C21	CKD-BN44-00056A	BN44-00056A, 2203-001458	SNA
BN83-00083A	C13	CKD-BN44-00056A	BN44-00056A, 2203-000455	SNA
BN83-00083A	C22	CKD-BN44-00056A	BN44-00056A, 2203-000455	SNA
BN83-00084A	C30	CKD-BN44-00056A	BN44-00056A, 2203-000590	SNA
BN83-00084A	C31	CKD-BN44-00056A	BN44-00056A, 2203-000590	SNA
BN83-00085A	C2	CKD-BN44-00056A	BN44-00056A, 2203-001130	SNA
BN83-00086A	C10	CKD-BN44-00056A	BN44-00056A, 2203-002793	SNA
BN83-00086A	C11	CKD-BN44-00056A	BN44-00056A, 2203-002793	SNA
BN83-00086A	C19	CKD-BN44-00056A	BN44-00056A, 2203-002793	SNA
BN83-00086A	C20	CKD-BN44-00056A	BN44-00056A, 2203-002793	SNA
BN83-00087A	R19	CKD-BN44-00056A	BN44-00056A, 2007-000671	SNA
BN83-00087A	R20	CKD-BN44-00056A	BN44-00056A, 2007-000671	SNA
BN83-00087A	R45	CKD-BN44-00056A	BN44-00056A, 2007-000671	SNA
BN83-00087A	R46	CKD-BN44-00056A	BN44-00056A, 2007-000671	SNA
BN83-00088A	R2	CKD-BN44-00056A	BN44-00056A, 2007-001010	SNA
BN83-00089A	R21	CKD-BN44-00056A	BN44-00056A, 2007-000794	SNA
BN83-00089A	R22	CKD-BN44-00056A	BN44-00056A, 2007-000794	SNA
BN83-00089A	R47	CKD-BN44-00056A	BN44-00056A, 2007-000794	SNA
BN83-00089A	R48	CKD-BN44-00056A	BN44-00056A, 2007-000794	SNA
BN83-00089A	R63	CKD-BN44-00056A	BN44-00056A, 2007-000794	SNA
BN83-00089A	R66	CKD-BN44-00056A	BN44-00056A, 2007-000794	SNA
BN83-00090A	R1	CKD-BN44-00056A	BN44-00056A, 2007-000098	SNA
BN83-00090A	R23	CKD-BN44-00056A	BN44-00056A, 2007-000098	SNA
BN83-00090A	R24	CKD-BN44-00056A	BN44-00056A, 2007-000098	SNA
BN83-00090A	R29	CKD-BN44-00056A	BN44-00056A, 2007-000098	SNA
BN83-00090A	R3	CKD-BN44-00056A	BN44-00056A, 2007-000098	SNA
BN83-00090A	R49	CKD-BN44-00056A	BN44-00056A, 2007-000098	SNA
BN83-00090A	R50	CKD-BN44-00056A	BN44-00056A, 2007-000098	SNA
BN83-00090A	R55	CKD-BN44-00056A	BN44-00056A, 2007-000098	SNA
BN83-00091A	R25	CKD-BN44-00056A	BN44-00056A, 2007-000096	SNA
BN83-00091A	R52	CKD-BN44-00056A	BN44-00056A, 2007-000096	SNA
BN83-00092A	R31	CKD-BN44-00056A	BN44-00056A, 2007-000872	SNA
BN83-00092A	R34	CKD-BN44-00056A	BN44-00056A, 2007-000872	SNA
BN83-00092A	R57	CKD-BN44-00056A	BN44-00056A, 2007-000872	SNA
BN83-00092A	R8	CKD-BN44-00056A	BN44-00056A, 2007-000872	SNA
BN83-00093A	R27	CKD-BN44-00056A	BN44-00056A, 2007-000092	SNA
BN83-00093A	R54	CKD-BN44-00056A	BN44-00056A, 2007-000092	SNA
BN83-00093A	R62	CKD-BN44-00056A	BN44-00056A, 2007-000092	SNA
BN83-00093A	R65	CKD-BN44-00056A	BN44-00056A, 2007-000092	SNA
BN83-00093A	R94	CKD-BN44-00056A	BN44-00056A, 2007-000092	SNA
BN83-00094A	R28	CKD-BN44-00056A	BN44-00056A, 2007-000102	SNA
BN83-00094A	R70	CKD-BN44-00056A	BN44-00056A, 2007-000102	SNA
BN83-00094A	R77	CKD-BN44-00056A	BN44-00056A, 2007-000102	SNA
BN83-00094A	R78	CKD-BN44-00056A	BN44-00056A, 2007-000102	SNA
BN83-00094A	R84	CKD-BN44-00056A	BN44-00056A, 2007-000102	SNA
BN83-00094A	R85	CKD-BN44-00056A	BN44-00056A, 2007-000102	SNA
BN83-00094A	R91	CKD-BN44-00056A	BN44-00056A, 2007-000102	SNA
BN83-00094A	R92	CKD-BN44-00056A	BN44-00056A, 2007-000102	SNA
BN83-00095A	R73	CKD-BN44-00056A	BN44-00056A, 2007-000122	SNA
BN83-00095A	R74	CKD-BN44-00056A	BN44-00056A, 2007-000122	SNA
BN83-00095A	R75	CKD-BN44-00056A	BN44-00056A, 2007-000122	SNA
BN83-00095A	R76	CKD-BN44-00056A	BN44-00056A, 2007-000122	SNA
BN83-00096A	R5	CKD-BN44-00056A	BN44-00056A, 2007-000129	SNA
BN83-00097A	R6	CKD-BN44-00056A	BN44-00056A, 2007-001114	SNA
BN83-00097A	R79	CKD-BN44-00056A	BN44-00056A, 2007-001114	SNA

BN83-00098A	R69	CKD-BN44-00056A	BN44-00056A,2007-000269	SNA
BN83-00099A	R71	CKD-BN44-00056A	BN44-00056A,2007-000093	SNA
BN83-00099A	R72	CKD-BN44-00056A	BN44-00056A,2007-000093	SNA
BN83-00100A	R35	CKD-BN44-00056A	BN44-00056A,2007-000130	SNA
BN83-00100A	R4	CKD-BN44-00056A	BN44-00056A,2007-000130	SNA
BN83-00100A	R9	CKD-BN44-00056A	BN44-00056A,2007-000130	SNA
BN83-00101A	R10	CKD-BN44-00056A	BN44-00056A,2007-000090	SNA
BN83-00101A	R30	CKD-BN44-00056A	BN44-00056A,2007-000090	SNA
BN83-00101A	R36	CKD-BN44-00056A	BN44-00056A,2007-000090	SNA
BN83-00101A	R56	CKD-BN44-00056A	BN44-00056A,2007-000090	SNA
BN83-00101A	R61	CKD-BN44-00056A	BN44-00056A,2007-000090	SNA
BN83-00101A	R64	CKD-BN44-00056A	BN44-00056A,2007-000090	SNA
BN83-00101A	R95	CKD-BN44-00056A	BN44-00056A,2007-000090	SNA
BN83-00102A	R11	CKD-BN44-00056A	BN44-00056A,2007-000934	SNA
BN83-00102A	R12	CKD-BN44-00056A	BN44-00056A,2007-000934	SNA
BN83-00102A	R13	CKD-BN44-00056A	BN44-00056A,2007-000934	SNA
BN83-00102A	R14	CKD-BN44-00056A	BN44-00056A,2007-000934	SNA
BN83-00102A	R37	CKD-BN44-00056A	BN44-00056A,2007-000934	SNA
BN83-00102A	R38	CKD-BN44-00056A	BN44-00056A,2007-000934	SNA
BN83-00102A	R39	CKD-BN44-00056A	BN44-00056A,2007-000934	SNA
BN83-00102A	R40	CKD-BN44-00056A	BN44-00056A,2007-000934	SNA
BN83-00103A	R80	CKD-BN44-00056A	BN44-00056A,2007-000070	SNA
BN83-00103A	R83	CKD-BN44-00056A	BN44-00056A,2007-000070	SNA
BN83-00103A	R93	CKD-BN44-00056A	BN44-00056A,2007-000070	SNA
BN83-00104A	R81	CKD-BN44-00056A	BN44-00056A,2007-002422	SNA
BN83-00104A	R82	CKD-BN44-00056A	BN44-00056A,2007-002422	SNA
BN83-00105A	R86	CKD-BN44-00056A	BN44-00056A,2007-000691	SNA
BN83-00105A	R87	CKD-BN44-00056A	BN44-00056A,2007-000691	SNA
BN83-00106A	R100	CKD-BN44-00056A	BN44-00056A,2104-000224	SNA
BN83-00107A	L1	CKD-BN44-00056A	BN44-00056A,LH27-00145A	SNA
BN83-00107A	L2	CKD-BN44-00056A	BN44-00056A,LH27-00145A	SNA
BN83-00108A	F1	CKD-BN44-00056A	BN44-00056A,3601-001038	SNA
BN83-00109A	T1	CKD-BN44-00056A	BN44-00056A,LH26-00144A	SNA
BN83-00109A	T2	CKD-BN44-00056A	BN44-00056A,LH26-00144A	SNA
BN83-00110A	CN1	CKD-BN44-00056A	BN44-00056A,3711-000556	SNA
BN83-00111A	CN2	CKD-BN44-00056A	BN44-00056A,3711-004702	SNA
BN83-00111A	CN3	CKD-BN44-00056A	BN44-00056A,3711-004702	SNA
BN83-00111A	CN4	CKD-BN44-00056A	BN44-00056A,3711-004702	SNA
BN83-00111A	CN5	CKD-BN44-00056A	BN44-00056A,3711-004702	SNA
BN83-00112A	PCB	CKD-BN44-00056A	BN44-00056A,LH41-00214A	SNA
BN83-00113A	INSULATOR	CKD-BN44-00056A	BN44-00056A,LH72-00170A	SNA
BN83-00137A	CIS	CKD-BN44-00056A	BN44-00056A,2007-000091	SNA
BN63-00003A	CIS	GASKET-SHIELD	LSA700,POLYURETHANE SPONGE,-,-,35MM,-,-,-	SNA
BN63-00059A	CIS	GASKET	GH17MS,CONDUCTIVE FABRIC,5MM,160MM,17MM,-,-,EMI-GASKET	SNA
BN63-00066A	CIS	SHIELD-D SUB	EOS15,SPTT ,TO.5,-,-,-,-	SNA
BN63-00121A	CIS	GASKET	EOS,CONDUCTIVE FABRIC,4MM,30MM,80MM,GRAY,71TSSK 30-4-80-13,71TSSK 30-4-80-13	SNA
BN63-00133A	CIS	GASKET	EOS,CONDUCTIVE FABRIC,17MM,5MM,260MM,GRAY,71TSK17-5-260-13,71TSK17-5-260-13	SNA
BN75-00233A	CIS	UNIT-SHIELD PCB	EOS 15",-,-,SECC,TO.8,-,-,-,-,-	SNA
BN97-00054H	-	ASSY MICOM	ES15AS,-,-,-,-,-,-,-,-	
1102-001128	IC901	IC-EPROM	M27C2001,256KX8BIT,PDIP,32P,535MIL,55NS,5V,10%,PLASTIC,OTO+70C,-,-,ST	
BN46-00009D	CIS	S/W MICOM	ES15AS,-,-,-,-,-,-,-	SNA
BN97-00059A	-	ASSY SMD-MAIN	ES15AS	SNA
0202-001162	CIS	SOLDER-CREAM	RMA-20-21L,S63,-,SN63/PB36.6/AGO.4,FLUX9.5%	SNA
0401-001056	D100	DIODE-SWITCHING	MMBD4148SE,75V,200MA,SOT-23,TP	
0401-001056	D101	DIODE-SWITCHING	MMBD4148SE,75V,200MA,SOT-23,TP	

0401-001056	D102	DIODE-SWITCHING	MMBD4148SE,75V,200MA,SOT-23,TP
0401-001056	ZD102	DIODE-SWITCHING	MMBD4148SE,75V,200MA,SOT-23,TP
0401-001056	ZD103	DIODE-SWITCHING	MMBD4148SE,75V,200MA,SOT-23,TP
0401-001056	ZD104	DIODE-SWITCHING	MMBD4148SE,75V,200MA,SOT-23,TP
0402-000553	D801	DIODE-RECTIFIER	SS24,40V,2.0A,D0-214AA
0402-000553	D802	DIODE-RECTIFIER	SS24,40V,2.0A,D0-214AA
0402-000553	D803	DIODE-RECTIFIER	SS24,40V,2.0A,D0-214AA
0403-000277	ZD807	DIODE-ZENER	MMBZ5226B,3.3V,5%,225mW,SOT-23
0403-000277	ZD808	DIODE-ZENER	MMBZ5226B,3.3V,5%,225mW,SOT-23
0403-000277	ZD809	DIODE-ZENER	MMBZ5226B,3.3V,5%,225mW,SOT-23
0403-000277	ZD810	DIODE-ZENER	MMBZ5226B,3.3V,5%,225mW,SOT-23
0403-000579	ZD100	DIODE-ZENER	BZX84C5V1,5.1V,5%,200mW,SOT-23
0403-000579	ZD101	DIODE-ZENER	BZX84C5V1,5.1V,5%,200mW,SOT-23
0403-000579	ZD207	DIODE-ZENER	BZX84C5V1,5.1V,5%,200mW,SOT-23
0403-000579	ZD800	DIODE-ZENER	BZX84C5V1,5.1V,5%,200mW,SOT-23
0403-000579	ZD801	DIODE-ZENER	BZX84C5V1,5.1V,5%,200mW,SOT-23
0403-000579	ZD802	DIODE-ZENER	BZX84C5V1,5.1V,5%,200mW,SOT-23
0403-000579	ZD803	DIODE-ZENER	BZX84C5V1,5.1V,5%,200mW,SOT-23
0403-000579	ZD804	DIODE-ZENER	BZX84C5V1,5.1V,5%,200mW,SOT-23
0403-000579	ZD805	DIODE-ZENER	BZX84C5V1,5.1V,5%,200mW,SOT-23
0403-000579	ZD806	DIODE-ZENER	BZX84C5V1,5.1V,5%,200mW,SOT-23
0403-000579	ZD900	DIODE-ZENER	BZX84C5V1,5.1V,5%,200mW,SOT-23
0403-001052	D114	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	D115	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	D116	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	D117	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	D200	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	D201	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	D202	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	D203	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	ZD200	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	ZD201	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	ZD202	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	ZD203	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	ZD204	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	ZD205	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	ZD206	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	ZD811	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	ZD812	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	ZD813	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	ZD814	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	ZD815	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	ZD816	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	ZD817	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	ZD818	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	ZD819	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	ZD820	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0403-001052	ZD821	DIODE-ZENER	RD8.2MB,8.2V,7.7-8.64V,200mW,S
0501-002080	Q100	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270
0501-002080	Q101	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270
0501-002080	Q200	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270
0501-002080	Q201	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270
0501-002080	Q202	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270
0501-002080	Q800	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270
0501-002080	Q801	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270

0501-002080	Q802	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270	
0501-002080	Q803	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270	
0501-002080	Q804	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270	
0501-002080	Q805	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270	
0501-002080	Q806	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270	
0501-002080	Q807	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270	
0501-002080	Q900	TR-SMALL SIGNAL	2SC2412K,NPN,200mW,SC-59,TP,120-270	
0505-001170	IC801	FET-SILICON	SI9933ADY-T1,P,-20V,3.4A,0.06ohm,2W,SO-8	
0505-001170	IC802	FET-SILICON	SI9933ADY-T1,P,-20V,3.4A,0.06ohm,2W,SO-8	
0801-000397	IC904	IC-CMOS LOGIC	74HC04,INVERTER,SOP,14P,150MIL	
0801-000411	IC903	IC-CMOS LOGIC	74HC32,OR GATE,SOP,14P,150MIL,	
0801-000411	IC905	IC-CMOS LOGIC	74HC32,OR GATE,SOP,14P,150MIL,	
0801-000888	IC806	IC-CMOS LOGIC	74HCT04,INVERTER,SOP,14P,150MI	
0801-002267	IC101	IC-CMOS LOGIC	74LCX14,-,SOIC,14P,150MIL,-,TP,-,-,3.6V,-40TO+85C,-,5.5V,-,24MA	
0801-002268	IC906	IC-CMOS LOGIC	74VHC139,DECODER,SOP,16P,150MI	
0801-002709	IC902	IC-CMOS LOGIC	74HC373,D FLIP-FLOP,TSSOP,20P,173MIL,OCTAL,TP,PLASTIC,3-STATE,-,0V,-40TO+85C,600	
0903-001202	IC908	IC-MICROCONTROLLER	80251G2,8Bit,PLCC,44P,653MIL,24MHz,TR,CMOS,PLASTIC,5V,1.5W,0to+70C,1KBYTE,-,24Bi	SNA
1001-001082	IC206	IC-VIDEO SWITCH	BA7657F,-,SOP,24P,300MIL,SINGL	
1001-001109	IC204	IC-ANALOG SWITCH	FST3125M,BUS SWITCH & CMOS,SOIC,17P,150MIL,QUAD,7V,-40TO+85C,PLASTIC,-,4.00HM,5.	
1003-001391	IC300	IC-DISPLAY DRIVER	FLI2200,QFP,176P,945MIL,-,TR,PLASTIC,5.5V,-40TO+85C,1.75W,-,DISPLAY SUPPORT	
1103-000138	IC907	IC-EEPROM	24C16,2Kx8BIT,SOP,8P,150MIL,10	
1103-001023	IC202	IC-EEPROM	524C80D81,1028x8Bit,SOP,8P,150MIL,10mS,5V,10%,PLASTIC,0to+70C,110uA,CMOS,TP	
1103-001164	IC100	IC-EEPROM	24LC21A,128X8BIT,SOP,8P,150MIL,-,5V,10%,PLASTIC,0 TO +70C,100UA,CMOS,TP	
1105-001391	IC302	IC-DRAM	EM638325,2MX32BIT,TSOP(II),86P,400MIL,60NS,3.3V,10%,PLASTIC,0TO+70C,3MA,-,TR	
1105-001391	IC500	IC-DRAM	EM638325,2MX32BIT,TSOP(II),86P,400MIL,60NS,3.3V,10%,PLASTIC,0TO+70C,3MA,-,TR	
1105-001391	IC502	IC-DRAM	EM638325,2MX32BIT,TSOP(II),86P,400MIL,60NS,3.3V,10%,PLASTIC,0TO+70C,3MA,-,TR	
1201-001495	IC704	IC-AUDIO AMP	7050,SOP,8P,150MIL,DUAL,26DB,PLASTIC,6V,0.25W,-,40DB,-,20NA,-	
1201-001681	IC702	IC-AUDIO AMP	1101,SOP,30P,433MIL,-,PLASTIC,13.2V,-,0to+70C,-,-,-,TP	
1203-001109	IC900	IC-VOL. DETECTOR	7045,SOT-89,3P,-,PLASTIC,4.3/4	
1203-001447	IC805	IC-POS1.FIXED REG.	2596,TO-263,5P,-,PLASTIC,3.135	
1203-001465	IC402	IC-POS1.ADJUST REG.	317,TO-263,3P,-,PLASTIC,1.2/37	
1203-001488	IC200	IC-POS1.FIXED REG.	7805,TO-252,3P,-,PLASTIC,4.8/5	
1203-001779	IC703	IC-POS1.FIXED REG.	7812,D2PAK,3P,-,PLASTIC,11.5/12.5V,-,40TO+125CC,1A,-,TP	
1203-001816	IC701	IC-POS1.FIXED REG.	78M08,TO-252,3P,-,PLASTIC,7.7/8.3V,1.0W,-40TO+85C,0.5A,-,TP	
1203-001830	IC804	IC-SWITCH VOL. REG.	2676,TO-263,7P,-,PLASTIC,3.234/3.336V,-,40TO+125C,3A,-,TP	
1203-001831	IC803	IC-SWITCH VOL. REG.	2676,TO-263,7P,-,PLASTIC,4.900/5.100V,-,40TO+125C,3A,-,TP	
1203-002410	IC105	IC-POS1.ADJUST REG.	KA317MR,D-PAK,3P,240MIL,PLASTIC,40V,-,0TO+125C,0.5A,1.2/1.3V,TP	
1203-002410	IC301	IC-POS1.ADJUST REG.	KA317MR,D-PAK,3P,240MIL,PLASTIC,40V,-,0TO+125C,0.5A,1.2/1.3V,TP	
1203-002450	IC104	IC-VOLTAGE REGULATOR	MC33375ST-2.5T3,SOT-223,4P,137MIL,PLASTIC,2.475/2.525V,-,40TO+125C,300MA,-,TP	
1204-000292	IC103	IC-VIDEO SYSTEM	LM1881M,SOP,8P,150MIL,PLASTIC,	
1204-001926	IC201	IC-VIDEO PROCESS	VPC3230D-C5,PQFP,80P,-,PLASTIC,6V,-,0 TO 65C,TP,VPC3230D-C5	
1204-002007	IC700	IC-SOUND PROCESSOR	MSP3411G-QA-B8,PQFP,80P,20X14MM,PLASTIC,8.7V,1W,0TO+70C,TR,-	
1205-001740	IC600	IC-TRANSMITTER	DS90C385,TSSOP,56P,240MIL,PLASTIC,4V,1.63W,-10 TO +70C,ST,FPD LINK-85MHZ(LVDS)	
1205-002028	IC102	IC-LCD CONTROLLER	JAGASM,BGA,388P,208MIL,PALATIC,3.45V,2.5W,-40TO+125C,TR,DIGITAL DISPLAY PRO.	
1205-002028	IC400	IC-LCD CONTROLLER	JAGASM,BGA,388P,208MIL,PALATIC,3.45V,2.5W,-40TO+125C,TR,DIGITAL DISPLAY PRO.	
2007-000070	R146	R-CHIP	0ohm,5%,1/16W,DA,TP,1608	
2007-000070	R149	R-CHIP	0ohm,5%,1/16W,DA,TP,1608	
2007-000070	R150	R-CHIP	0ohm,5%,1/16W,DA,TP,1608	
2007-000070	R193	R-CHIP	0ohm,5%,1/16W,DA,TP,1608	
2007-000070	R194	R-CHIP	0ohm,5%,1/16W,DA,TP,1608	
2007-000070	R195	R-CHIP	0ohm,5%,1/16W,DA,TP,1608	
2007-000070	R231	R-CHIP	0ohm,5%,1/16W,DA,TP,1608	
2007-000070	R250	R-CHIP	0ohm,5%,1/16W,DA,TP,1608	
2007-000070	R251	R-CHIP	0ohm,5%,1/16W,DA,TP,1608	
2007-000070	R259	R-CHIP	0ohm,5%,1/16W,DA,TP,1608	

2007-000075	R900	R-CHIP	220ohm,5%,1/16W,DA,TP,1608
2007-000076	R233	R-CHIP	330ohm,5%,1/16W,DA,TP,1608
2007-000076	R235	R-CHIP	330ohm,5%,1/16W,DA,TP,1608
2007-000076	R750	R-CHIP	330ohm,5%,1/16W,DA,TP,1608
2007-000076	R751	R-CHIP	330ohm,5%,1/16W,DA,TP,1608
2007-000077	R177	R-CHIP	470ohm,5%,1/16W,DA,TP,1608
2007-000077	R178	R-CHIP	470ohm,5%,1/16W,DA,TP,1608
2007-000077	R323	R-CHIP	470ohm,5%,1/16W,DA,TP,1608
2007-000077	R324	R-CHIP	470ohm,5%,1/16W,DA,TP,1608
2007-000077	R439	R-CHIP	470ohm,5%,1/16W,DA,TP,1608
2007-000077	R440	R-CHIP	470ohm,5%,1/16W,DA,TP,1608
2007-000077	R806	R-CHIP	470ohm,5%,1/16W,DA,TP,1608
2007-000077	R807	R-CHIP	470ohm,5%,1/16W,DA,TP,1608
2007-000077	R832	R-CHIP	470ohm,5%,1/16W,DA,TP,1608
2007-000077	R840	R-CHIP	470ohm,5%,1/16W,DA,TP,1608
2007-000077	R841	R-CHIP	470ohm,5%,1/16W,DA,TP,1608
2007-000078	R118	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R198	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R210	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R219	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R234	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R236	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R273	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R277	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R282	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R498	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R726	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R805	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R808	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R809	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R810	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R811	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R842	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R843	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R851	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R925	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000078	R926	R-CHIP	1Kohm,5%,1/16W,DA,TP,1608
2007-000080	R253	R-CHIP	2Kohm,5%,1/16W,DA,TP,1608
2007-000080	R254	R-CHIP	2Kohm,5%,1/16W,DA,TP,1608
2007-000080	R255	R-CHIP	2Kohm,5%,1/16W,DA,TP,1608
2007-000082	R122	R-CHIP	3.3Kohm,5%,1/16W,DA,TP,1608
2007-000084	R116	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R117	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R241	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R242	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R243	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R244	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R245	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R246	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R741	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R742	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R749	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R800	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R801	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R802	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608

2007-000084	R803	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R827	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R829	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R831	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R904	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R910	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R930	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R931	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R932	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R933	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R934	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R935	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R936	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000084	R937	R-CHIP	4.7Kohm,5%,1/16W,DA,TP,1608
2007-000088	R100	R-CHIP	7.5Kohm,5%,1/16W,DA,TP,1608
2007-000090	R108	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R134	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R145	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R168	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R237	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R300	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R301	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R312	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R317	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R332	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R333	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R406	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R420	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R500	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R502	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R506	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R508	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R743	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R744	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R745	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R746	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R812	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R820	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R822	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R823	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R826	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R828	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R830	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R846	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R847	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R902	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R909	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R924	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000090	R929	R-CHIP	10KOHM,5%,1/16W,DA,TP,1608
2007-000092	R201	R-CHIP	15Kohm,5%,1/16W,DA,TP,1608
2007-000092	R903	R-CHIP	15Kohm,5%,1/16W,DA,TP,1608
2007-000093	R238	R-CHIP	20Kohm,5%,1/16W,DA,TP,1608
2007-000093	R730	R-CHIP	20Kohm,5%,1/16W,DA,TP,1608
2007-000093	R731	R-CHIP	20Kohm,5%,1/16W,DA,TP,1608
2007-000094	R203	R-CHIP	22Kohm,5%,1/16W,DA,TP,1608

2007-000098	R717	R-CHIP	56Kohm, 5%, 1/16W, DA, TP, 1608
2007-000098	R719	R-CHIP	56Kohm, 5%, 1/16W, DA, TP, 1608
2007-000098	R848	R-CHIP	56Kohm, 5%, 1/16W, DA, TP, 1608
2007-000098	R849	R-CHIP	56Kohm, 5%, 1/16W, DA, TP, 1608
2007-000102	R110	R-CHIP	100Kohm, 5%, 1/16W, DA, TP, 1608
2007-000102	R819	R-CHIP	100Kohm, 5%, 1/16W, DA, TP, 1608
2007-000102	R821	R-CHIP	100Kohm, 5%, 1/16W, DA, TP, 1608
2007-000102	R824	R-CHIP	100Kohm, 5%, 1/16W, DA, TP, 1608
2007-000102	R825	R-CHIP	100Kohm, 5%, 1/16W, DA, TP, 1608
2007-000102	R835	R-CHIP	100Kohm, 5%, 1/16W, DA, TP, 1608
2007-000102	R837	R-CHIP	100Kohm, 5%, 1/16W, DA, TP, 1608
2007-000109	R733	R-CHIP	1Mohm, 5%, 1/16W, DA, TP, 1608
2007-000116	R190	R-CHIP	120ohm, 5%, 1/16W, DA, TP, 1608
2007-000119	R107	R-CHIP	560ohm, 5%, 1/16W, DA, TP, 1608
2007-000124	R905	R-CHIP	2.2Kohm, 5%, 1/16W, DA, TP, 1608
2007-000124	R906	R-CHIP	2.2Kohm, 5%, 1/16W, DA, TP, 1608
2007-000124	R907	R-CHIP	2.2Kohm, 5%, 1/16W, DA, TP, 1608
2007-000124	R908	R-CHIP	2.2Kohm, 5%, 1/16W, DA, TP, 1608
2007-000124	R939	R-CHIP	2.2Kohm, 5%, 1/16W, DA, TP, 1608
2007-000125	R103	R-CHIP	3.9Kohm, 5%, 1/16W, DA, TP, 1608
2007-000132	R101	R-CHIP	180Kohm, 5%, 1/16W, DA, TP, 1608
2007-000132	R102	R-CHIP	180Kohm, 5%, 1/16W, DA, TP, 1608
2007-000308	R734	R-CHIP	100HM, 5%, 1/10W, DA, TP, 2012
2007-000308	R735	R-CHIP	100HM, 5%, 1/10W, DA, TP, 2012
2007-000309	R113	R-CHIP	10ohm, 5%, 1/16W, DA, TP, 1608
2007-000309	R192	R-CHIP	10ohm, 5%, 1/16W, DA, TP, 1608
2007-000458	R729	R-CHIP	18Kohm, 5%, 1/16W, DA, TP, 1608
2007-000458	R732	R-CHIP	18Kohm, 5%, 1/16W, DA, TP, 1608
2007-000518	R728	R-CHIP	2.7KOHM, 5%, 1/10W, DA, TP, 2012
2007-000616	R256	R-CHIP	24Kohm, 5%, 1/16W, DA, TP, 1608
2007-000819	R191	R-CHIP	390Kohm, 5%, 1/16W, DA, TP, 1608
2007-000947	R605	R-CHIP	470HM, 5%, 1/10W, DA, TP, 2012
2007-000947	R606	R-CHIP	470HM, 5%, 1/10W, DA, TP, 2012
2007-000947	R607	R-CHIP	470HM, 5%, 1/10W, DA, TP, 2012
2007-000947	R608	R-CHIP	470HM, 5%, 1/10W, DA, TP, 2012
2007-000947	R609	R-CHIP	470HM, 5%, 1/10W, DA, TP, 2012
2007-000947	R610	R-CHIP	470HM, 5%, 1/10W, DA, TP, 2012
2007-000947	R611	R-CHIP	470HM, 5%, 1/10W, DA, TP, 2012
2007-000947	R612	R-CHIP	470HM, 5%, 1/10W, DA, TP, 2012
2007-000947	R613	R-CHIP	470HM, 5%, 1/10W, DA, TP, 2012
2007-000947	R614	R-CHIP	470HM, 5%, 1/10W, DA, TP, 2012
2007-000981	R727	R-CHIP	5.6KOHM, 5%, 1/10W, DA, TP, 2012
2007-001044	R123	R-CHIP	56ohm, 5%, 1/16W, DA, TP, 1608
2007-001167	R127	R-CHIP	75ohm, 5%, 1/16W, DA, TP, 1608
2007-001167	R128	R-CHIP	75ohm, 5%, 1/16W, DA, TP, 1608
2007-001167	R129	R-CHIP	75ohm, 5%, 1/16W, DA, TP, 1608
2007-001167	R205	R-CHIP	75ohm, 5%, 1/16W, DA, TP, 1608
2007-001167	R206	R-CHIP	75ohm, 5%, 1/16W, DA, TP, 1608
2007-001167	R208	R-CHIP	75ohm, 5%, 1/16W, DA, TP, 1608
2007-001167	R211	R-CHIP	75ohm, 5%, 1/16W, DA, TP, 1608
2007-001167	R212	R-CHIP	75ohm, 5%, 1/16W, DA, TP, 1608
2007-001167	R257	R-CHIP	75ohm, 5%, 1/16W, DA, TP, 1608
2007-001167	R258	R-CHIP	75ohm, 5%, 1/16W, DA, TP, 1608
2007-001167	R272	R-CHIP	75ohm, 5%, 1/16W, DA, TP, 1608
2007-001167	R274	R-CHIP	75ohm, 5%, 1/16W, DA, TP, 1608

2007-001167	R278	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R283	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R285	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R286	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R289	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R290	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R292	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R294	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R854	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R855	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2007-001167	R856	R-CHIP	75ohm,5%,1/16W,DA,TP,1608
2011-000002	RA100	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA101	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA102	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA103	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA104	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA105	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA106	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA107	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA200	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA201	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA202	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA203	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA300	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA301	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA302	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA303	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA400	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA401	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA402	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA403	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA404	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA405	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA406	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA407	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA408	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA409	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA410	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA411	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA412	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2011-000002	RA413	R-NETWORK	22ohm,5%,63mW,L,CHIP,8P,TP
2203-000140	C213	C-CERAMIC,CHIP	1.5nF,10%,50V,X7R,TP,1608,-
2203-000140	C231	C-CERAMIC,CHIP	1.5nF,10%,50V,X7R,TP,1608,-
2203-000140	C251	C-CERAMIC,CHIP	1.5nF,10%,50V,X7R,TP,1608,-
2203-000140	C256	C-CERAMIC,CHIP	1.5nF,10%,50V,X7R,TP,1608,-
2203-000140	C704	C-CERAMIC,CHIP	1.5nF,10%,50V,X7R,TP,1608,-
2203-000140	C714	C-CERAMIC,CHIP	1.5nF,10%,50V,X7R,TP,1608,-
2203-000140	C729	C-CERAMIC,CHIP	1.5nF,10%,50V,X7R,TP,1608,-
2203-000140	C790	C-CERAMIC,CHIP	1.5nF,10%,50V,X7R,TP,1608,-
2203-000140	C791	C-CERAMIC,CHIP	1.5nF,10%,50V,X7R,TP,1608,-
2203-000189	C100	C-CERAMIC,CHIP	100nF,+80-20%,25V,Y5V,TP,1608,
2203-000189	C110	C-CERAMIC,CHIP	100nF,+80-20%,25V,Y5V,TP,1608,
2203-000189	C111	C-CERAMIC,CHIP	100nF,+80-20%,25V,Y5V,TP,1608,
2203-000189	C114	C-CERAMIC,CHIP	100nF,+80-20%,25V,Y5V,TP,1608,
2203-000189	C116	C-CERAMIC,CHIP	100nF,+80-20%,25V,Y5V,TP,1608,

2203-000440	C621	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000440	C622	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000440	C623	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000440	C723	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000440	C724	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000440	C860	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000440	C861	C-CERAMIC,CHIP	1nF,10%,50V,X7R,TP,1608,-
2203-000491	C261	C-CERAMIC,CHIP	2.2nF,10%,50V,X7R,TP,1608,-
2203-000697	C103	C-CERAMIC,CHIP	0.002nF,0.25pF,50V,NP0,TP,1608
2203-000697	C104	C-CERAMIC,CHIP	0.002nF,0.25pF,50V,NP0,TP,1608
2203-000697	C105	C-CERAMIC,CHIP	0.002nF,0.25pF,50V,NP0,TP,1608
2203-000701	C709	C-CERAMIC,CHIP	0.002nF,0.25pF,50V,NP0,TP,2012
2203-000701	C710	C-CERAMIC,CHIP	0.002nF,0.25pF,50V,NP0,TP,2012
2203-000716	C719	C-CERAMIC,CHIP	3.3nF,10%,50V,X7R,TP,2012,-
2203-000716	C720	C-CERAMIC,CHIP	3.3nF,10%,50V,X7R,TP,2012,-
2203-000784	C772	C-CERAMIC,CHIP	0.33nF,5%,50V,NP0,TP,2012
2203-000784	C774	C-CERAMIC,CHIP	0.33nF,5%,50V,NP0,TP,2012
2203-000784	C777	C-CERAMIC,CHIP	0.33nF,5%,50V,NP0,TP,2012
2203-000784	C835	C-CERAMIC,CHIP	0.33nF,5%,50V,NP0,TP,2012
2203-000784	C837	C-CERAMIC,CHIP	0.33nF,5%,50V,NP0,TP,2012
2203-000784	C843	C-CERAMIC,CHIP	0.33nF,5%,50V,NP0,TP,2012
2203-000784	C845	C-CERAMIC,CHIP	0.33nF,5%,50V,NP0,TP,2012
2203-000815	C906	C-CERAMIC,CHIP	0.033nF,5%,50V,NP0,TP,1608
2203-000815	C907	C-CERAMIC,CHIP	0.033nF,5%,50V,NP0,TP,1608
2203-000838	C214	C-CERAMIC,CHIP	0.39nF,5%,50V,NP0,TP,1608
2203-000838	C230	C-CERAMIC,CHIP	0.39nF,5%,50V,NP0,TP,1608
2203-000903	C603	C-CERAMIC,CHIP	0.0047nF,0.25pF,50V,NP0,TP,1608
2203-000903	C604	C-CERAMIC,CHIP	0.0047nF,0.25pF,50V,NP0,TP,1608
2203-000903	C605	C-CERAMIC,CHIP	0.0047nF,0.25pF,50V,NP0,TP,1608
2203-000903	C606	C-CERAMIC,CHIP	0.0047nF,0.25pF,50V,NP0,TP,1608
2203-000903	C607	C-CERAMIC,CHIP	0.0047nF,0.25pF,50V,NP0,TP,1608
2203-000903	C608	C-CERAMIC,CHIP	0.0047nF,0.25pF,50V,NP0,TP,1608
2203-000903	C609	C-CERAMIC,CHIP	0.0047nF,0.25pF,50V,NP0,TP,1608
2203-000903	C610	C-CERAMIC,CHIP	0.0047nF,0.25pF,50V,NP0,TP,1608
2203-000903	C611	C-CERAMIC,CHIP	0.0047nF,0.25pF,50V,NP0,TP,1608
2203-000903	C612	C-CERAMIC,CHIP	0.0047nF,0.25pF,50V,NP0,TP,1608
2203-000903	C708	C-CERAMIC,CHIP	0.0047nF,0.25pF,50V,NP0,TP,1608
2203-000903	C711	C-CERAMIC,CHIP	0.0047nF,0.25pF,50V,NP0,TP,1608
2203-000972	C206	C-CERAMIC,CHIP	47nF,10%,16V,X7R,TP,1608
2203-000972	C216	C-CERAMIC,CHIP	47nF,10%,16V,X7R,TP,1608
2203-000972	C252	C-CERAMIC,CHIP	47nF,10%,16V,X7R,TP,1608
2203-000972	C257	C-CERAMIC,CHIP	47nF,10%,16V,X7R,TP,1608
2203-000972	C713	C-CERAMIC,CHIP	47nF,10%,16V,X7R,TP,1608
2203-000998	C295	C-CERAMIC,CHIP	0.047nF,5%,50V,NP0,TP,1608
2203-001077	C242	C-CERAMIC,CHIP	0.056nF,5%,50V,NP0,TP,2012
2203-001077	C243	C-CERAMIC,CHIP	0.056nF,5%,50V,NP0,TP,2012
2203-001077	C700	C-CERAMIC,CHIP	0.056nF,5%,50V,NP0,TP,2012
2203-001077	C706	C-CERAMIC,CHIP	0.056nF,5%,50V,NP0,TP,2012
2203-001077	C707	C-CERAMIC,CHIP	0.056nF,5%,50V,NP0,TP,2012
2203-001077	C853	C-CERAMIC,CHIP	0.056nF,5%,50V,NP0,TP,2012
2203-001077	C854	C-CERAMIC,CHIP	0.056nF,5%,50V,NP0,TP,2012
2203-001140	C253	C-CERAMIC,CHIP	68nF,10%,16V,X7R,TP,1608,-
2203-001140	C254	C-CERAMIC,CHIP	68nF,10%,16V,X7R,TP,1608,-
2203-001140	C255	C-CERAMIC,CHIP	68nF,10%,16V,X7R,TP,1608,-
2203-001158	C151	C-CERAMIC,CHIP	0.068nF,5%,50V,NP0,TP,2012

2203-001158	C152	C-CERAMIC,CHIP	0.068nF,5%,50V,NP0,TP,2012
2203-001391	C741	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C742	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C743	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C745	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C746	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C747	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C748	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C749	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C750	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C751	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C752	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C753	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C754	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001391	C756	C-CERAMIC,CHIP	150nF,10%,25V,X7R,TP,2012,-
2203-001402	C212	C-CERAMIC,CHIP	220nF,+80-20%,16V,Y5V,TP,1608
2203-001402	C220	C-CERAMIC,CHIP	220nF,+80-20%,16V,Y5V,TP,1608
2203-001402	C221	C-CERAMIC,CHIP	220nF,+80-20%,16V,Y5V,TP,1608
2203-001402	C222	C-CERAMIC,CHIP	220nF,+80-20%,16V,Y5V,TP,1608
2203-001402	C232	C-CERAMIC,CHIP	220nF,+80-20%,16V,Y5V,TP,1608
2203-001402	C804	C-CERAMIC,CHIP	220nF,+80-20%,16V,Y5V,TP,1608
2203-001402	C805	C-CERAMIC,CHIP	220nF,+80-20%,16V,Y5V,TP,1608
2203-001607	C717	C-CERAMIC,CHIP	0.22nF,5%,50V,NP0,TP,1608
2203-001630	C262	C-CERAMIC,CHIP	330nF,+80-20%,16V,Y5V,TP,1608
2203-001656	C705	C-CERAMIC,CHIP	0.47nF,5%,50V,NP0,TP,1608
2203-001656	C715	C-CERAMIC,CHIP	0.47nF,5%,50V,NP0,TP,1608
2203-001656	C728	C-CERAMIC,CHIP	0.47nF,5%,50V,NP0,TP,1608
2203-002793	C245	C-CERAMIC,CHIP	1000nF,+80-20%,25V,Y5V,TP,2012
2203-002793	C405	C-CERAMIC,CHIP	1000nF,+80-20%,25V,Y5V,TP,2012
2203-002793	C421	C-CERAMIC,CHIP	1000nF,+80-20%,25V,Y5V,TP,2012
2203-002793	C739	C-CERAMIC,CHIP	1000nF,+80-20%,25V,Y5V,TP,2012
2203-005005	C170	C-CERAMIC,CHIP	100nF,10%,16V,X7R,TP,1608
2203-005005	C195	C-CERAMIC,CHIP	100nF,10%,16V,X7R,TP,1608
2203-005005	C419	C-CERAMIC,CHIP	100nF,10%,16V,X7R,TP,1608
2203-005005	C901	C-CERAMIC,CHIP	100nF,10%,16V,X7R,TP,1608
2203-005065	C101	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C102	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C106	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C107	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C108	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C112	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C113	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C119	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C120	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C124	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C127	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C128	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C130	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C131	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C138	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C139	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C141	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C142	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C146	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C147	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608

2203-005065	C153	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C154	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005065	C194	C-CERAMIC,CHIP	1000nF,+80-20%,10V,Y5V,TP,1608
2203-005189	C207	C-CERAMIC,CHIP	680nF,+80-20%,16V,Y5V,TP,2012,
2203-005189	C208	C-CERAMIC,CHIP	680nF,+80-20%,16V,Y5V,TP,2012,
2203-005189	C209	C-CERAMIC,CHIP	680nF,+80-20%,16V,Y5V,TP,2012,
2203-005189	C210	C-CERAMIC,CHIP	680nF,+80-20%,16V,Y5V,TP,2012,
2203-005189	C211	C-CERAMIC,CHIP	680nF,+80-20%,16V,Y5V,TP,2012,
2203-005189	C721	C-CERAMIC,CHIP	680nF,+80-20%,16V,Y5V,TP,2012,
2203-005189	C722	C-CERAMIC,CHIP	680nF,+80-20%,16V,Y5V,TP,2012,
2402-000108	C173	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C203	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C300	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C303	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C305	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C310	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C402	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C420	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C601	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C613	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C615	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C618	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C620	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C701	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C703	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C716	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C727	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C731	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C814	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C852	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C902	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000108	C903	C-AL,SMD	10uF,20%,16V,WT,TP,4.3x4.3x5.4
2402-000176	C117	C-AL,SMD	10uF,20%,16V,GP,TP,4.3x4.3x5.4
2402-000176	C134	C-AL,SMD	10uF,20%,16V,GP,TP,4.3x4.3x5.4
2402-000176	C169	C-AL,SMD	10uF,20%,16V,GP,TP,4.3x4.3x5.4
2402-000176	C179	C-AL,SMD	10uF,20%,16V,GP,TP,4.3x4.3x5.4
2402-000176	C190	C-AL,SMD	10uF,20%,16V,GP,TP,4.3x4.3x5.4
2402-000176	C191	C-AL,SMD	10uF,20%,16V,GP,TP,4.3x4.3x5.4
2402-000176	C260	C-AL,SMD	10uF,20%,16V,GP,TP,4.3x4.3x5.4
2402-000176	C264	C-AL,SMD	10uF,20%,16V,GP,TP,4.3x4.3x5.4
2402-000176	C266	C-AL,SMD	10uF,20%,16V,GP,TP,4.3x4.3x5.4
2402-000176	C268	C-AL,SMD	10uF,20%,16V,GP,TP,4.3x4.3x5.4
2402-000176	C274	C-AL,SMD	10uF,20%,16V,GP,TP,4.3x4.3x5.4
2402-000176	C276	C-AL,SMD	10uF,20%,16V,GP,TP,4.3x4.3x5.4
2402-000176	C278	C-AL,SMD	10uF,20%,16V,GP,TP,4.3x4.3x5.4
2402-000176	C290	C-AL,SMD	10uF,20%,16V,GP,TP,4.3x4.3x5.4
2402-000176	C434	C-AL,SMD	10uF,20%,16V,GP,TP,4.3x4.3x5.4
2402-000176	C735	C-AL,SMD	10uF,20%,16V,GP,TP,4.3x4.3x5.4
2402-000176	U383	C-AL,SMD	10uF,20%,16V,GP,TP,4.3x4.3x5.4
2402-000176	U389	C-AL,SMD	10uF,20%,16V,GP,TP,4.3x4.3x5.4
2402-000179	C175	C-AL,SMD	47uF,20%,16V,GP,TP,6.6x6.6x5.4
2402-000179	C202	C-AL,SMD	47uF,20%,16V,GP,TP,6.6x6.6x5.4
2402-000209	C500	C-AL,SMD	22uF,20%,16V,WT,TP,5.3x5.3mm,1
2402-000209	C526	C-AL,SMD	22uF,20%,16V,WT,TP,5.3x5.3mm,1
2402-000209	C841	C-AL,SMD	22uF,20%,16V,WT,TP,5.3x5.3mm,1


2402-000209	C842	C-AL, SMD	22uF, 20%, 16V, WT, TP, 5.3x5.3mm, 1
2402-001006	C767	C-AL, SMD	4.7uF, 20%, 25V, GP, TP, 3.6x6.3x3.
2402-001006	C769	C-AL, SMD	4.7uF, 20%, 25V, GP, TP, 3.6x6.3x3.
2402-001006	C771	C-AL, SMD	4.7uF, 20%, 25V, GP, TP, 3.6x6.3x3.
2402-001006	C773	C-AL, SMD	4.7uF, 20%, 25V, GP, TP, 3.6x6.3x3.
2402-001006	C776	C-AL, SMD	4.7uF, 20%, 25V, GP, TP, 3.6x6.3x3.
2402-001006	C836	C-AL, SMD	4.7uF, 20%, 25V, GP, TP, 3.6x6.3x3.
2402-001006	C838	C-AL, SMD	4.7uF, 20%, 25V, GP, TP, 3.6x6.3x3.
2402-001006	C844	C-AL, SMD	4.7uF, 20%, 25V, GP, TP, 3.6x6.3x3.
2402-001006	C846	C-AL, SMD	4.7uF, 20%, 25V, GP, TP, 3.6x6.3x3.
2402-001042	C730	C-AL, SMD	100uF, 20%, 16V, GP, TP, 6.6x6.6x5.4mm
2402-001086	C177	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C758	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C759	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C760	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C764	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C765	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C766	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C813	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C817	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C818	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C821	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C823	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C827	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C828	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C832	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C833	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C855	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001086	C857	C-AL, SMD	100UF, 20%, 16V, WT, TP, 6.6X6.6X5.3
2402-001155	C200	C-AL, SMD	47UF, 20%, 16V, WT, TP, 6.3X5.2MM
2402-001155	C205	C-AL, SMD	47UF, 20%, 16V, WT, TP, 6.3X5.2MM
2402-001155	C215	C-AL, SMD	47UF, 20%, 16V, WT, TP, 6.3X5.2MM
2402-001157	C725	C-AL, SMD	0.33UF, 20%, 50V, GP, TP, 4X5.2MM
2402-001157	C726	C-AL, SMD	0.33UF, 20%, 50V, GP, TP, 4X5.2MM
2402-001158	C738	C-AL, SMD	1UF, 20%, 50V, WT, TP, 4X5.2MM
2402-001158	C811	C-AL, SMD	1UF, 20%, 50V, WT, TP, 4X5.2MM
2402-001158	C812	C-AL, SMD	1UF, 20%, 50V, WT, TP, 4X5.2MM
2402-001158	C815	C-AL, SMD	1UF, 20%, 50V, WT, TP, 4X5.2MM
2402-001158	C816	C-AL, SMD	1UF, 20%, 50V, WT, TP, 4X5.2MM
2402-001159	C732	C-AL, SMD	3.3UF, 20%, 50V, WT, TP, 4X5.2MM
2409-001035	C150	C-ORGANIC	10uF, 20%, 10V, LZ, TP, 5.4x4.3x4.3mm, 1
2409-001035	U386	C-ORGANIC	10uF, 20%, 10V, LZ, TP, 5.4x4.3x4.3mm, 1
2409-001035	U387	C-ORGANIC	10uF, 20%, 10V, LZ, TP, 5.4x4.3x4.3mm, 1
2503-001018	CA100	C-NETWORK	15PFX4, 10%, 50V, -
2503-001018	CA101	C-NETWORK	15PFX4, 10%, 50V, -
2503-001018	CA102	C-NETWORK	15PFX4, 10%, 50V, -
2503-001018	CA103	C-NETWORK	15PFX4, 10%, 50V, -
2503-001018	CA104	C-NETWORK	15PFX4, 10%, 50V, -
2503-001018	CA105	C-NETWORK	15PFX4, 10%, 50V, -
2503-001018	CA300	C-NETWORK	15PFX4, 10%, 50V, -
2503-001018	CA301	C-NETWORK	15PFX4, 10%, 50V, -
2503-001018	CA302	C-NETWORK	15PFX4, 10%, 50V, -
2503-001018	CA303	C-NETWORK	15PFX4, 10%, 50V, -
2503-001018	CA600	C-NETWORK	15PFX4, 10%, 50V, -
2503-001018	CA601	C-NETWORK	15PFX4, 10%, 50V, -

2503-001018	CA602	C-NETWORK	15PFX4, 10%, 50V, -	
2503-001018	CA603	C-NETWORK	15PFX4, 10%, 50V, -	
2503-001018	CA604	C-NETWORK	15PFX4, 10%, 50V, -	
2503-001018	CA605	C-NETWORK	15PFX4, 10%, 50V, -	
2703-000271	BD208	INDUCTOR-SMD	4.7uH, 10%, 2x1.25x1.25mm	
2703-000271	BD209	INDUCTOR-SMD	4.7uH, 10%, 2x1.25x1.25mm	
2703-000271	BD211	INDUCTOR-SMD	4.7uH, 10%, 2x1.25x1.25mm	
2703-000442	BD212	INDUCTOR-SMD	10UH, 10%, 2X1.25X1.25MM	
2703-000442	BD213	INDUCTOR-SMD	10UH, 10%, 2X1.25X1.25MM	
2703-001070	L201	INDUCTOR-SMD	100uH, 10%, 4.5x3.2x3.2mm	
2703-001778	L100	INDUCTOR-SMD	3.3UH, 20%, 3.2X2.5X2.2MM	
2703-001778	L101	INDUCTOR-SMD	3.3UH, 20%, 3.2X2.5X2.2MM	
2703-001778	L200	INDUCTOR-SMD	3.3UH, 20%, 3.2X2.5X2.2MM	
2703-001778	L700	INDUCTOR-SMD	3.3UH, 20%, 3.2X2.5X2.2MM	
2703-001778	L701	INDUCTOR-SMD	3.3UH, 20%, 3.2X2.5X2.2MM	
2801-003667	X900	CRYSTAL-SMD	14.3182MHZ, 50PPM, 28-AAN, 16, 50OHM, TP	
2801-003773	X201	CRYSTAL-SMD	12MHZ, 30PPM, 28-AAN, 20PF, 50OHM, TP	
2801-003843	X701	CRYSTAL-SMD	18.432MHz, 30ppm, 28-AAN, 20pF, 50ohm, TP	
2801-003846	X200	CRYSTAL-SMD	20.25MHz, 30ppm, 28-AAN, 20pF, 50ohm, TP	
2804-001474	X100	OSCILLATOR-CLOCK	14.31818MHZ, 100PPM, 30PF, TP, 3.3V, 15MA	
2901-001114	FT201	FILTER-EMI SMD	25VDC, 2.0ADC, -, 100nF, 3.2x1.6x1	
3301-001145	BD115	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	BD700	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	FT600	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	FT601	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	FT700	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	FT800	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	FT801	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	FT802	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	FT803	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	FT804	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	FT805	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	FT806	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	FT807	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001145	FT808	CORE-FERRITE BEAD	AB, 4.5x1.6x1.6mm, -, -	SNA
3301-001163	BD100	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD101	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD102	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD104	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD105	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD106	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD107	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD108	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD109	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD200	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD201	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD202	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD203	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD204	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD205	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD206	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD207	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD300	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD400	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	
3301-001163	BD401	CORE-FERRITE BEAD	AB, 80ohm, 2x1.25x1mm, 300mA, TP, FERRITE, 0.08ohm	

3301-001163	BD402	CORE-FERRITE BEAD	AB,80ohm,2x1.25x1mm,300mA,TP,FERRITE,0.08ohm	
3301-001163	BD600	CORE-FERRITE BEAD	AB,80ohm,2x1.25x1mm,300mA,TP,FERRITE,0.08ohm	
3301-001163	BD601	CORE-FERRITE BEAD	AB,80ohm,2x1.25x1mm,300mA,TP,FERRITE,0.08ohm	
3301-001163	BD602	CORE-FERRITE BEAD	AB,80ohm,2x1.25x1mm,300mA,TP,FERRITE,0.08ohm	
3301-001163	BD800	CORE-FERRITE BEAD	AB,80ohm,2x1.25x1mm,300mA,TP,FERRITE,0.08ohm	
3301-001163	BD801	CORE-FERRITE BEAD	AB,80ohm,2x1.25x1mm,300mA,TP,FERRITE,0.08ohm	
3301-001163	BD802	CORE-FERRITE BEAD	AB,80ohm,2x1.25x1mm,300mA,TP,FERRITE,0.08ohm	
3301-001163	BD803	CORE-FERRITE BEAD	AB,80ohm,2x1.25x1mm,300mA,TP,FERRITE,0.08ohm	
3301-001163	BD804	CORE-FERRITE BEAD	AB,80ohm,2x1.25x1mm,300mA,TP,FERRITE,0.08ohm	
3301-001163	BD805	CORE-FERRITE BEAD	AB,80ohm,2x1.25x1mm,300mA,TP,FERRITE,0.08ohm	
3301-001163	BD806	CORE-FERRITE BEAD	AB,80ohm,2x1.25x1mm,300mA,TP,FERRITE,0.08ohm	
3301-001163	BD807	CORE-FERRITE BEAD	AB,80ohm,2x1.25x1mm,300mA,TP,FERRITE,0.08ohm	
3301-001163	BD808	CORE-FERRITE BEAD	AB,80ohm,2x1.25x1mm,300mA,TP,FERRITE,0.08ohm	
3301-001163	BD812	CORE-FERRITE BEAD	AB,80ohm,2x1.25x1mm,300mA,TP,FERRITE,0.08ohm	
3301-001163	BD813	CORE-FERRITE BEAD	AB,80ohm,2x1.25x1mm,300mA,TP,FERRITE,0.08ohm	
3301-001163	BD900	CORE-FERRITE BEAD	AB,80ohm,2x1.25x1mm,300mA,TP,FERRITE,0.08ohm	
3301-001163	BD901	CORE-FERRITE BEAD	AB,80ohm,2x1.25x1mm,300mA,TP,FERRITE,0.08ohm	
3301-001163	BD902	CORE-FERRITE BEAD	AB,80ohm,2x1.25x1mm,300mA,TP,FERRITE,0.08ohm	
3301-001163	BD903	CORE-FERRITE BEAD	AB,80ohm,2x1.25x1mm,300mA,TP,FERRITE,0.08ohm	
3301-001163	BD904	CORE-FERRITE BEAD	AB,80ohm,2x1.25x1mm,300mA,TP,FERRITE,0.08ohm	
3301-001163	BD905	CORE-FERRITE BEAD	AB,80ohm,2x1.25x1mm,300mA,TP,FERRITE,0.08ohm	
3301-001163	BD906	CORE-FERRITE BEAD	AB,80ohm,2x1.25x1mm,300mA,TP,FERRITE,0.08ohm	
3301-001163	BD907	CORE-FERRITE BEAD	AB,80ohm,2x1.25x1mm,300mA,TP,FERRITE,0.08ohm	
3301-001236	BD111	CORE-FERRITE BEAD	AB,60ohm,1.6x0.8x0.8mm,200mA,TP,H,0.7ohm	
3301-001236	BD112	CORE-FERRITE BEAD	AB,60ohm,1.6x0.8x0.8mm,200mA,TP,H,0.7ohm	
3301-001236	BD113	CORE-FERRITE BEAD	AB,60ohm,1.6x0.8x0.8mm,200mA,TP,H,0.7ohm	
3711-000556	CN802	CONNECTOR-HEADER	BOX,12P,1R,1.25mm,SMD-A,SN	SNA
3711-002046	CN804	CONNECTOR-HEADER	3WALL,12P,1R,1.25mm,SMD-S,SN	SNA
3711-002049	CN805	CONNECTOR-HEADER	BOX,6P,1R,1.25mm,SMD-A,SN	SNA
3711-002049	CN900	CONNECTOR-HEADER	BOX,6P,1R,1.25mm,SMD-A,SN	SNA
3711-002127	CN800	CONNECTOR-HEADER	BOX,8P,1R,1.25mm,SMD-A,SN	SNA
3711-003161	CN600	CONNECTOR-HEADER	BOX,20P,1R,1.25mm,ANGLE,SN	
BN27-00007A	L702	COIL CHOKE-SMD	DHB0504-100,RB15/17NS,10UH,±10%,-,0.08OHM,1.5A,DR5.8X4.5,20.5TS,6.0X5.2X4.5MM,-	
BN27-00007A	L703	COIL CHOKE-SMD	DHB0504-100,RB15/17NS,10UH,±10%,-,0.08OHM,1.5A,DR5.8X4.5,20.5TS,6.0X5.2X4.5MM,-	
BN27-00007A	L704	COIL CHOKE-SMD	DHB0504-100,RB15/17NS,10UH,±10%,-,0.08OHM,1.5A,DR5.8X4.5,20.5TS,6.0X5.2X4.5MM,-	
BN27-00007A	L705	COIL CHOKE-SMD	DHB0504-100,RB15/17NS,10UH,±10%,-,0.08OHM,1.5A,DR5.8X4.5,20.5TS,6.0X5.2X4.5MM,-	
BN27-00009A	L803	COIL CHOKE	SMD 12X12X6,E0S,33UH,15%,-,0.12 MAX,2A,DR10X5.0MM,18.5TS,12X12X6,1.8MM,1UEW 0.	
BN27-20001A	L804	COIL-CHOKE	-,53.0UH,20%,DR10*5,-,-,-,0.18ohm,-,-,-,TRAY	
BN27-20001A	L805	COIL-CHOKE	-,53.0UH,20%,DR10*5,-,-,-,0.18ohm,-,-,-,TRAY	
BN41-00115A	MP1.0	PCB MAIN	ES15AS,FR4,6L,-,-,228X157X1.6,ES15AS,-,-,-	SNA
BN91-00305A	-	ASSY MISC-ADAPTOR	CS15MOA	SNA
BN44-00058A	CIS	ADAPTOR	PSCV420106A(AD-4214N,GH17PS,100 TO 240 VAC,47 - 63 HZ,+14VDC,3A,-,42W,AC-DC,0 T	
BN91-00524V	-	ASSY LCD	ES15AS	SNA
BN07-00091A	CIS	LCD	LTM150XH-L06,CZB,6BIT_ FRC,331.6*254.76*12.5,16.19M,-,0.297*0.297,-,-,AMLCD/1 LV	
BN92-00264A	-	ASSY BOX	ES15AS,-,-,-	SNA
BH75-10529A	CIS	UNIT-HANDLE PACKING	LXA410TLMU,PE,-,WHITE,-	SNA
BN72-60001A	CIS	LEVER TOP	LSD210TL,PE-LD,WHITE,TFT_LCD	SNA
BN72-60002A	CIS	LEVER BOTTOM	LSD210TL,PE-LD,WHITE,TFT-LCD	SNA
BN68-00135A	CIS	LABEL BAR CODE	-,ALL,MPRII,DOM,ART-PAPER 90G,-,WHT,BLACK,-,-,-	SNA
BN69-00254B	CIS	BOX	LW15E23C,GUJU,CB-SW4,YEL,A-1,-,-,-,L545*W453*H235,-	SNA
BN92-00265A	-	ASSY LABEL	ES15AS	SNA
0203-001159	CIS	TAPE-FILAMENT	#8915,TO.15,W12,L55000,CLR	SNA
BN68-00233B	CIS	LABEL RATING	ES15AS,EDC,PE,TO.05.90,45,SYNC,-,PE NATURE,-,-	SNA
BN92-00267A	-	ASSY P/MATERIAL	ES17S0	SNA
0203-001100	CIS	TAPE-OPP MASKING	OPP/W75/CLR,TO.05,W75,L800000,CLR	SNA


BH69-00457B	CIS	PACKING-PAD	GH15,FOAM,T3.0,930,1000	SNA
BH69-30355E	CIS	BAG-PE/N	NK15,PE FOAM,0.5,650,650,NTR	SNA
BH69-40321C	CIS	PACKING-EDGE	SW4/YEL,2030*140,-,CGC5637(HP)	SNA
BH69-40378A	CIS	PACKING-PALLET	WOOD,1300*1120*120,13500,CGE71	SNA
BH69-40379A	CIS	PACKING-WRAP	LDPE,W500*T0.02,-,-	SNA
BN68-00129A	CIS	LABEL SHIPPING	-,LABEL SHIPPING,ART-PAPER,100G,-,WHT,BLACK,-,-,-	SNA
BN69-00140T	CIS	PAD-PALLET COVER	SUN(LSA810),SW,900,3760,-,-,-,-,-	SNA
BN69-00230A	CIS	CUSHION-L/R	EOS15,EPS 50,-,-,-,-,-,-,-	SNA
BN92-00416B	-	ASSY ACCESSORY	LW15E23CX/XEF	SNA
BN96-00050B	CIS	ASSY ACCESSORY	LW15E23CX/XEF	SNA
0203-000214	CIS	TAPE-OPP MASKING	OPP/W50/CLR,T0.05,W50,L400000,	SNA
4301-000121	CIS	BATTERY-MN	1.5V,-,AAA,10.5x44.5m,HOLDER	SNA
6801-001009	CIS	CARD-WARRANTY	EUROPE(12),8	SNA
6801-001016	CIS	CARD-REGISTRATION	XEF,FRENCH,MOJO100,L150,W392,-,-	SNA
BH39-10339H	CIS	CBF POWER CORD	DET,H05VV-F,250V/10,16A,BLK,25	
BH59-00179A	CIS	S/W DRIVER-2.6	ALL,NATURA-COLOR,ALL,-	SNA
BH68-00297G	CIS	MANUAL-ETC-00	WIN2000,SAMSUNG,English,W/W,MIMOJO80G,-,148,210,-,-,-,-	SNA
BH69-30348D	CIS	BAG-PE	LDPE,T0.05,W240*L356,Y,-,CMG73	SNA
BN39-00043A	CIS	CBF SIGNAL	DETACHABLE,-,15P/15P,-,-,-	
BN59-00217B	CIS	REMOCON	-,TM71,EOS,40,GR20,SILVER C/T,PAL,-,-,-,-	
BN68-00235A	CIS	MANUAL USERS-06	LW-15E23C/LW-17E24C,SYNCMaster,E/F/S/G/I/SW,EDC,MIMOJO80G,-,148,210,-,-,-,-	

8 Block Diagram

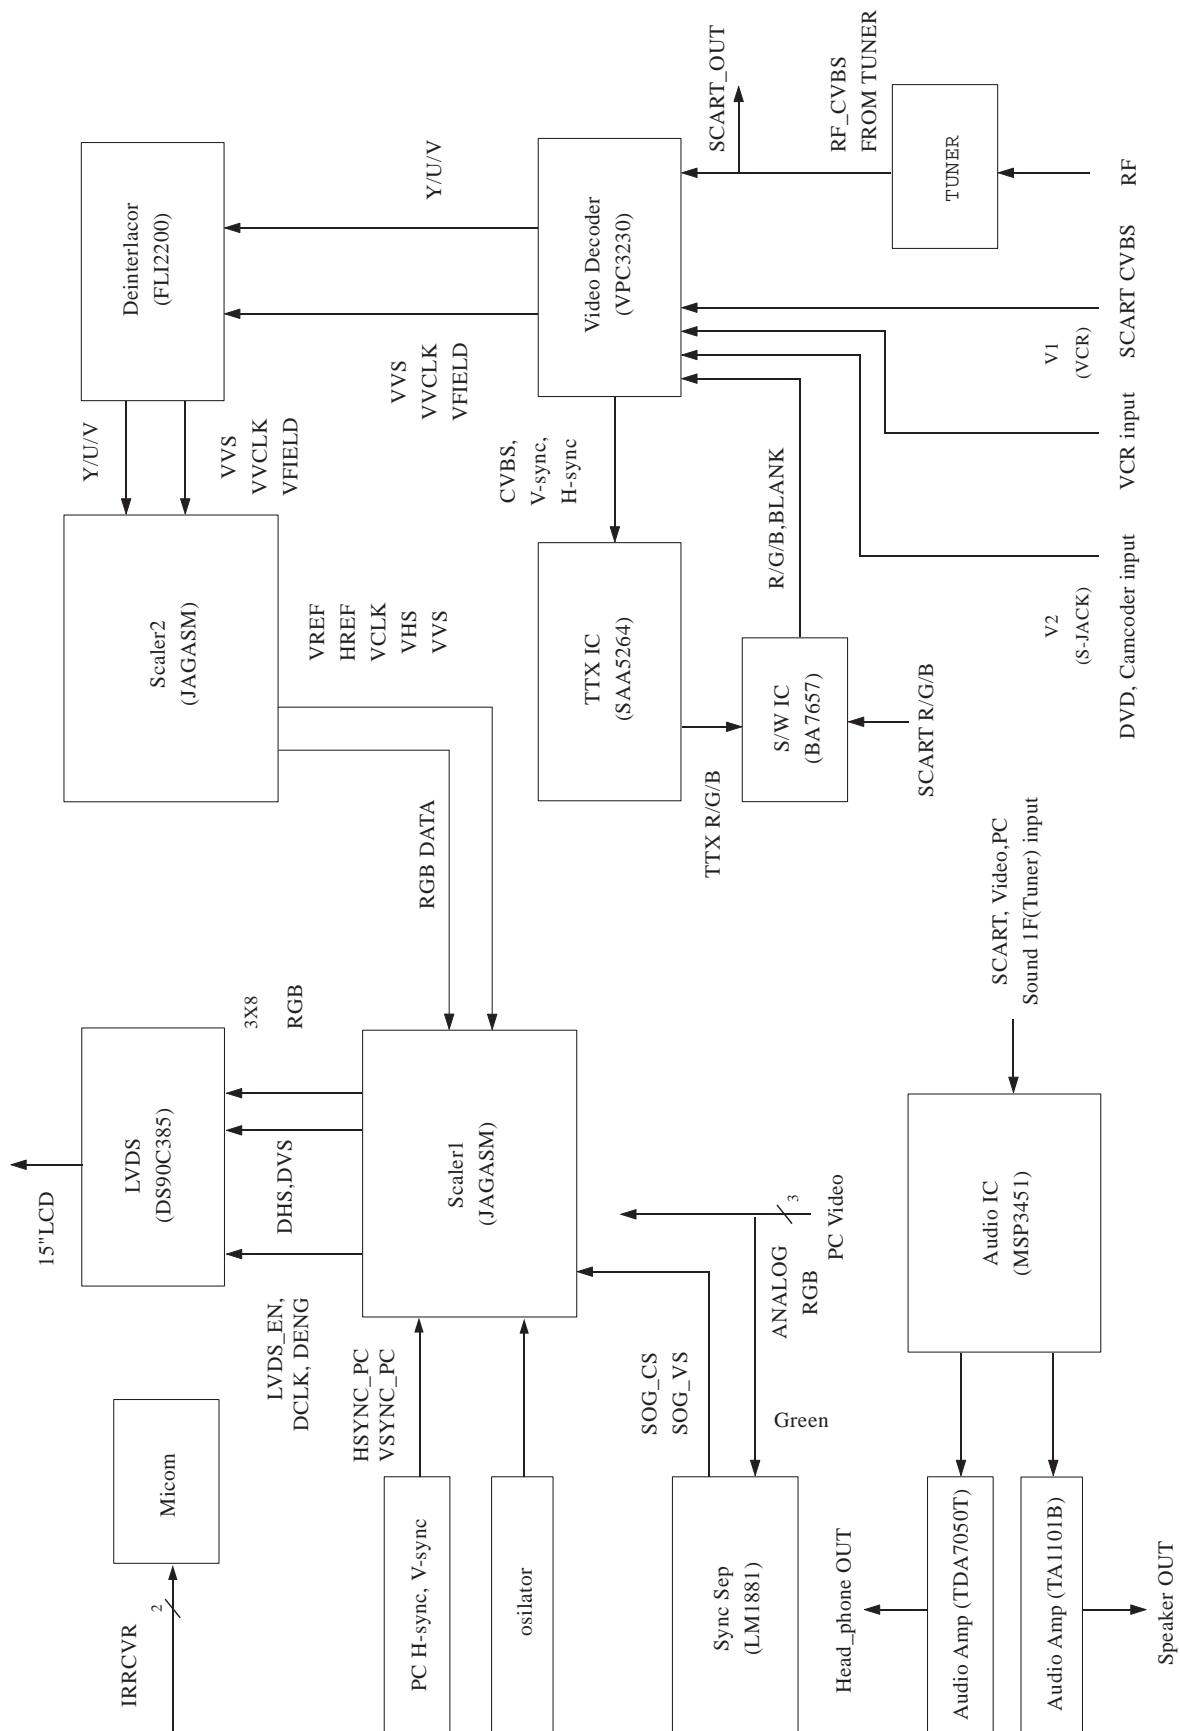

Memo




9 Wiring Diagram

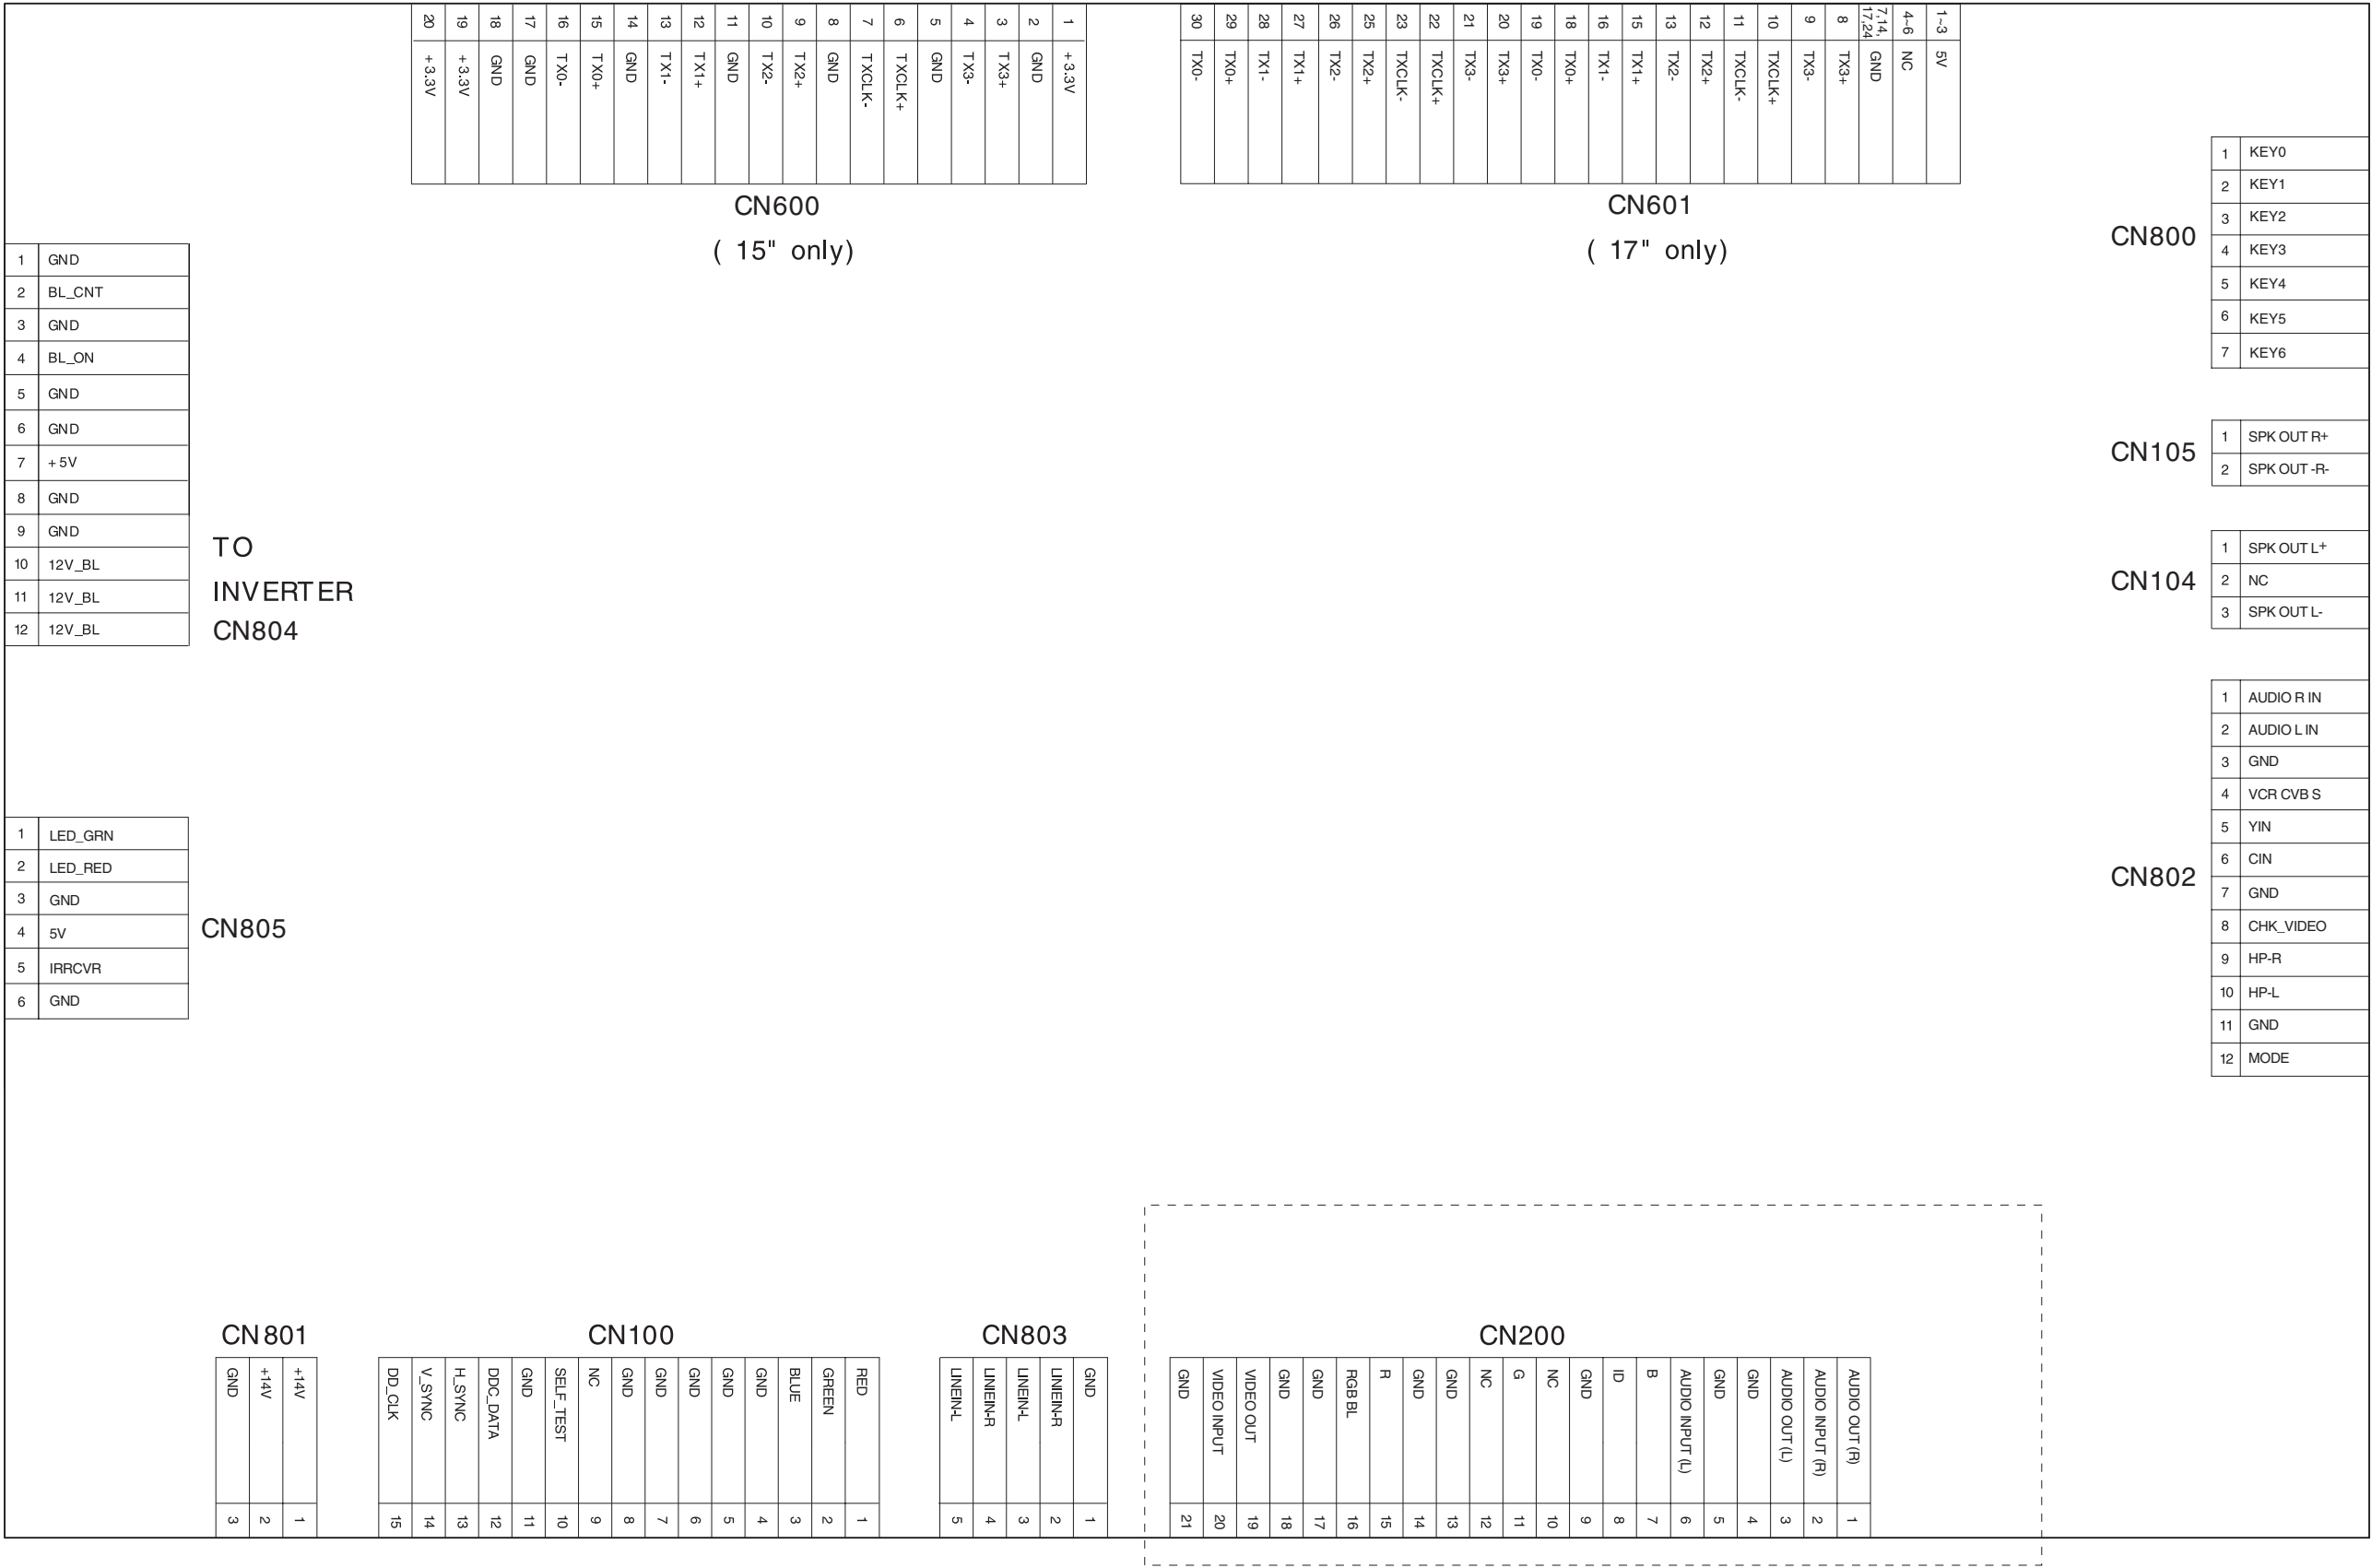


Memo




10-1 PC & JAG-1 Part Schematic Diagram



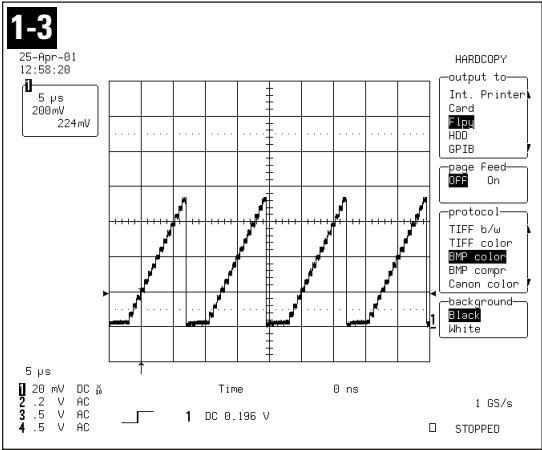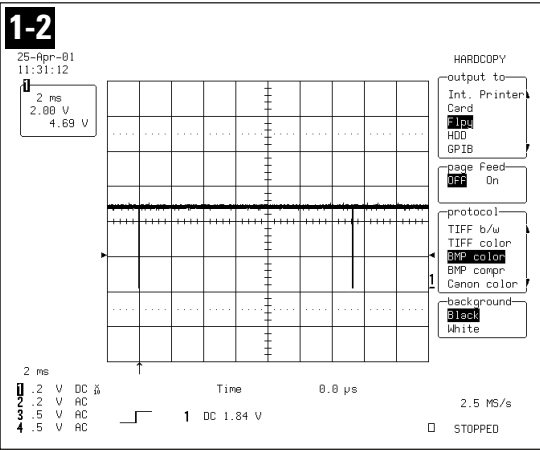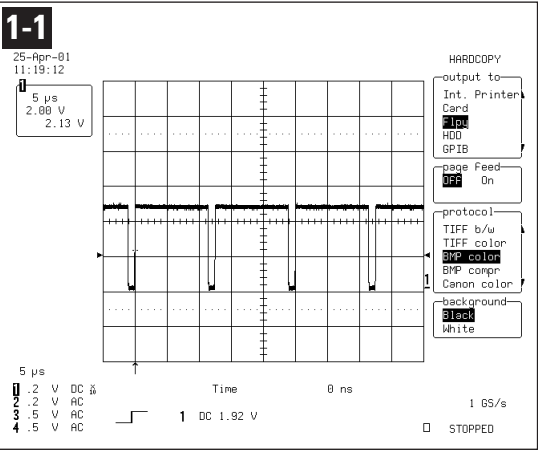


10-2 SCART & TTX & VPC Part Schematic Diagram

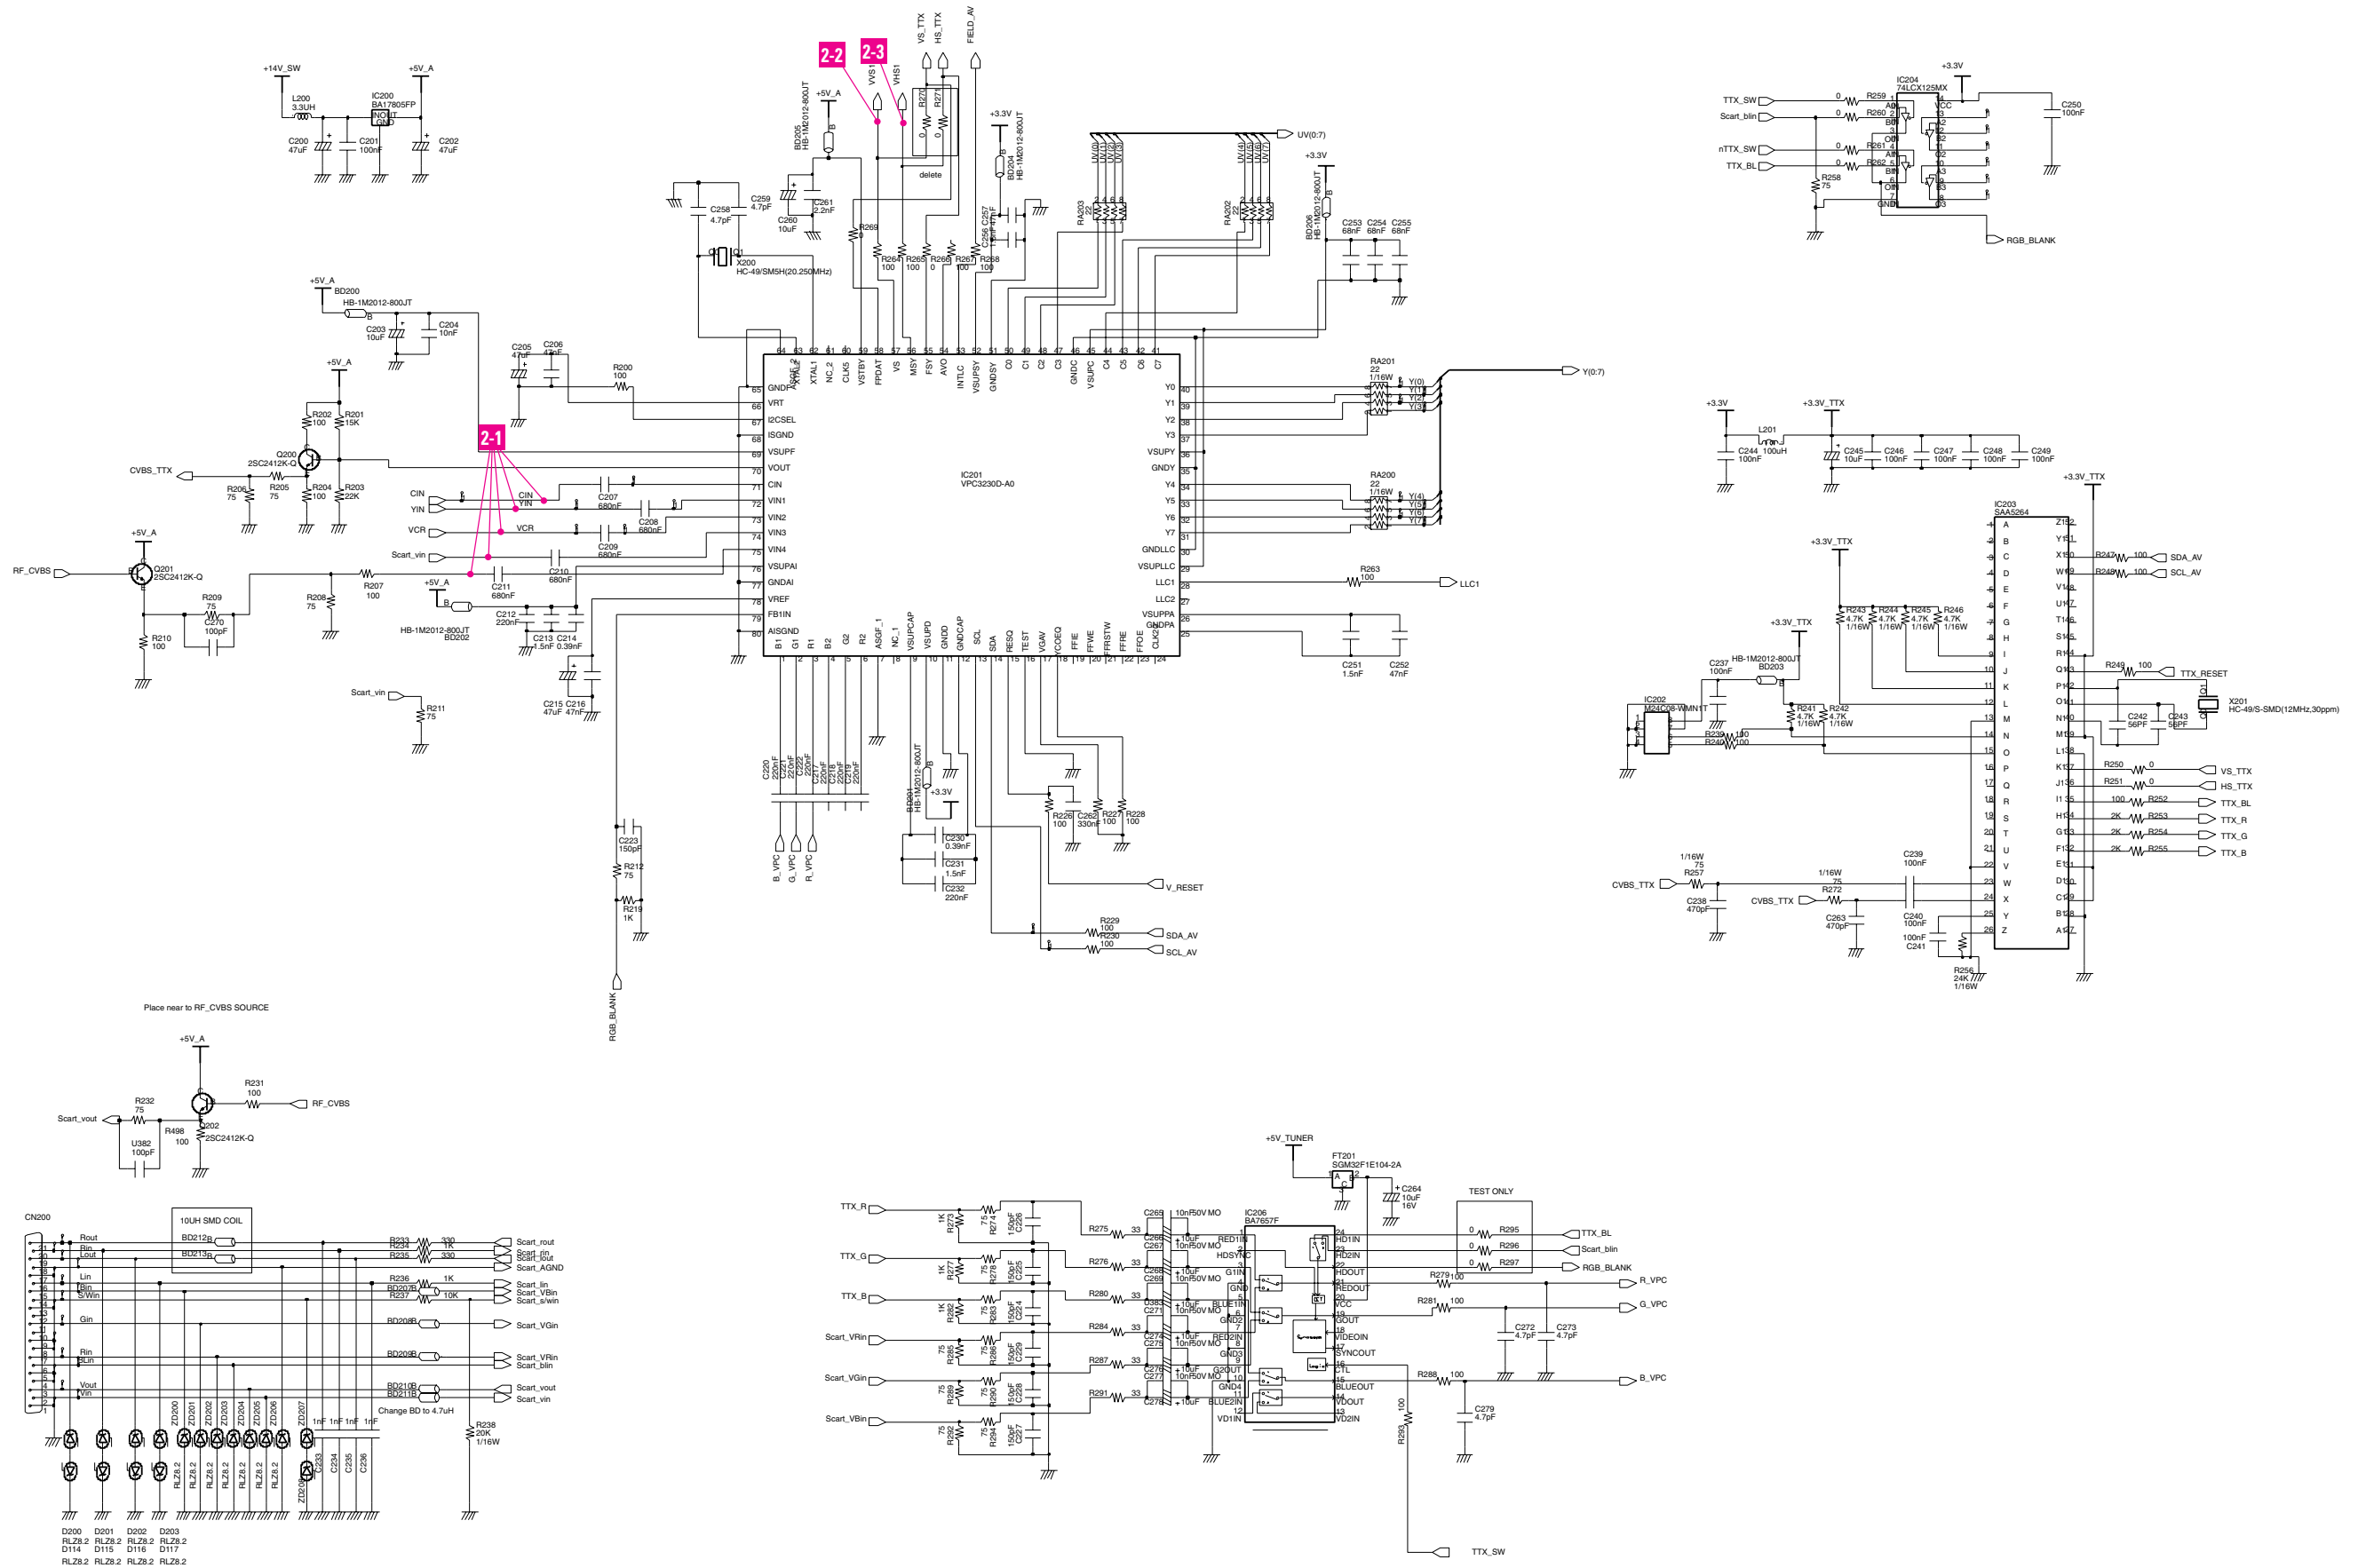

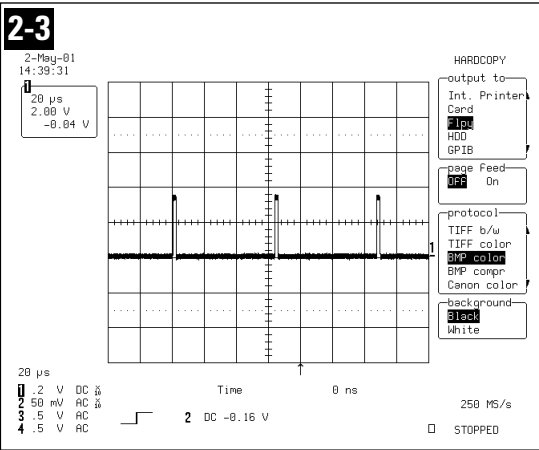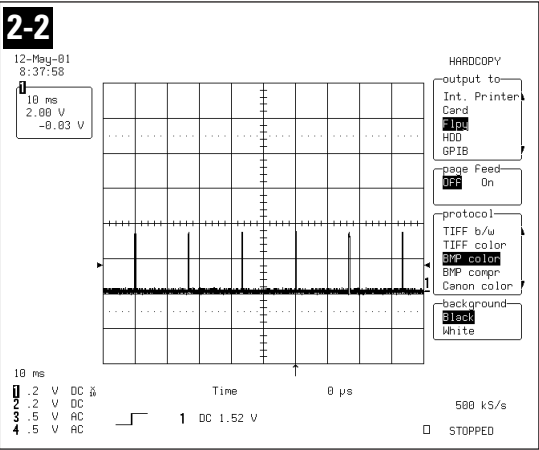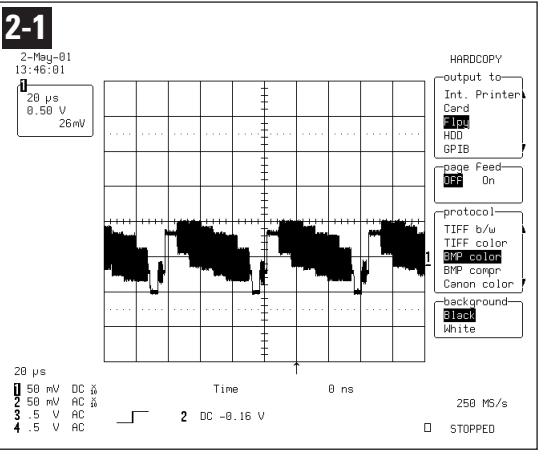


10-3 FLI_Deinterlacer Part Schematic Diagram

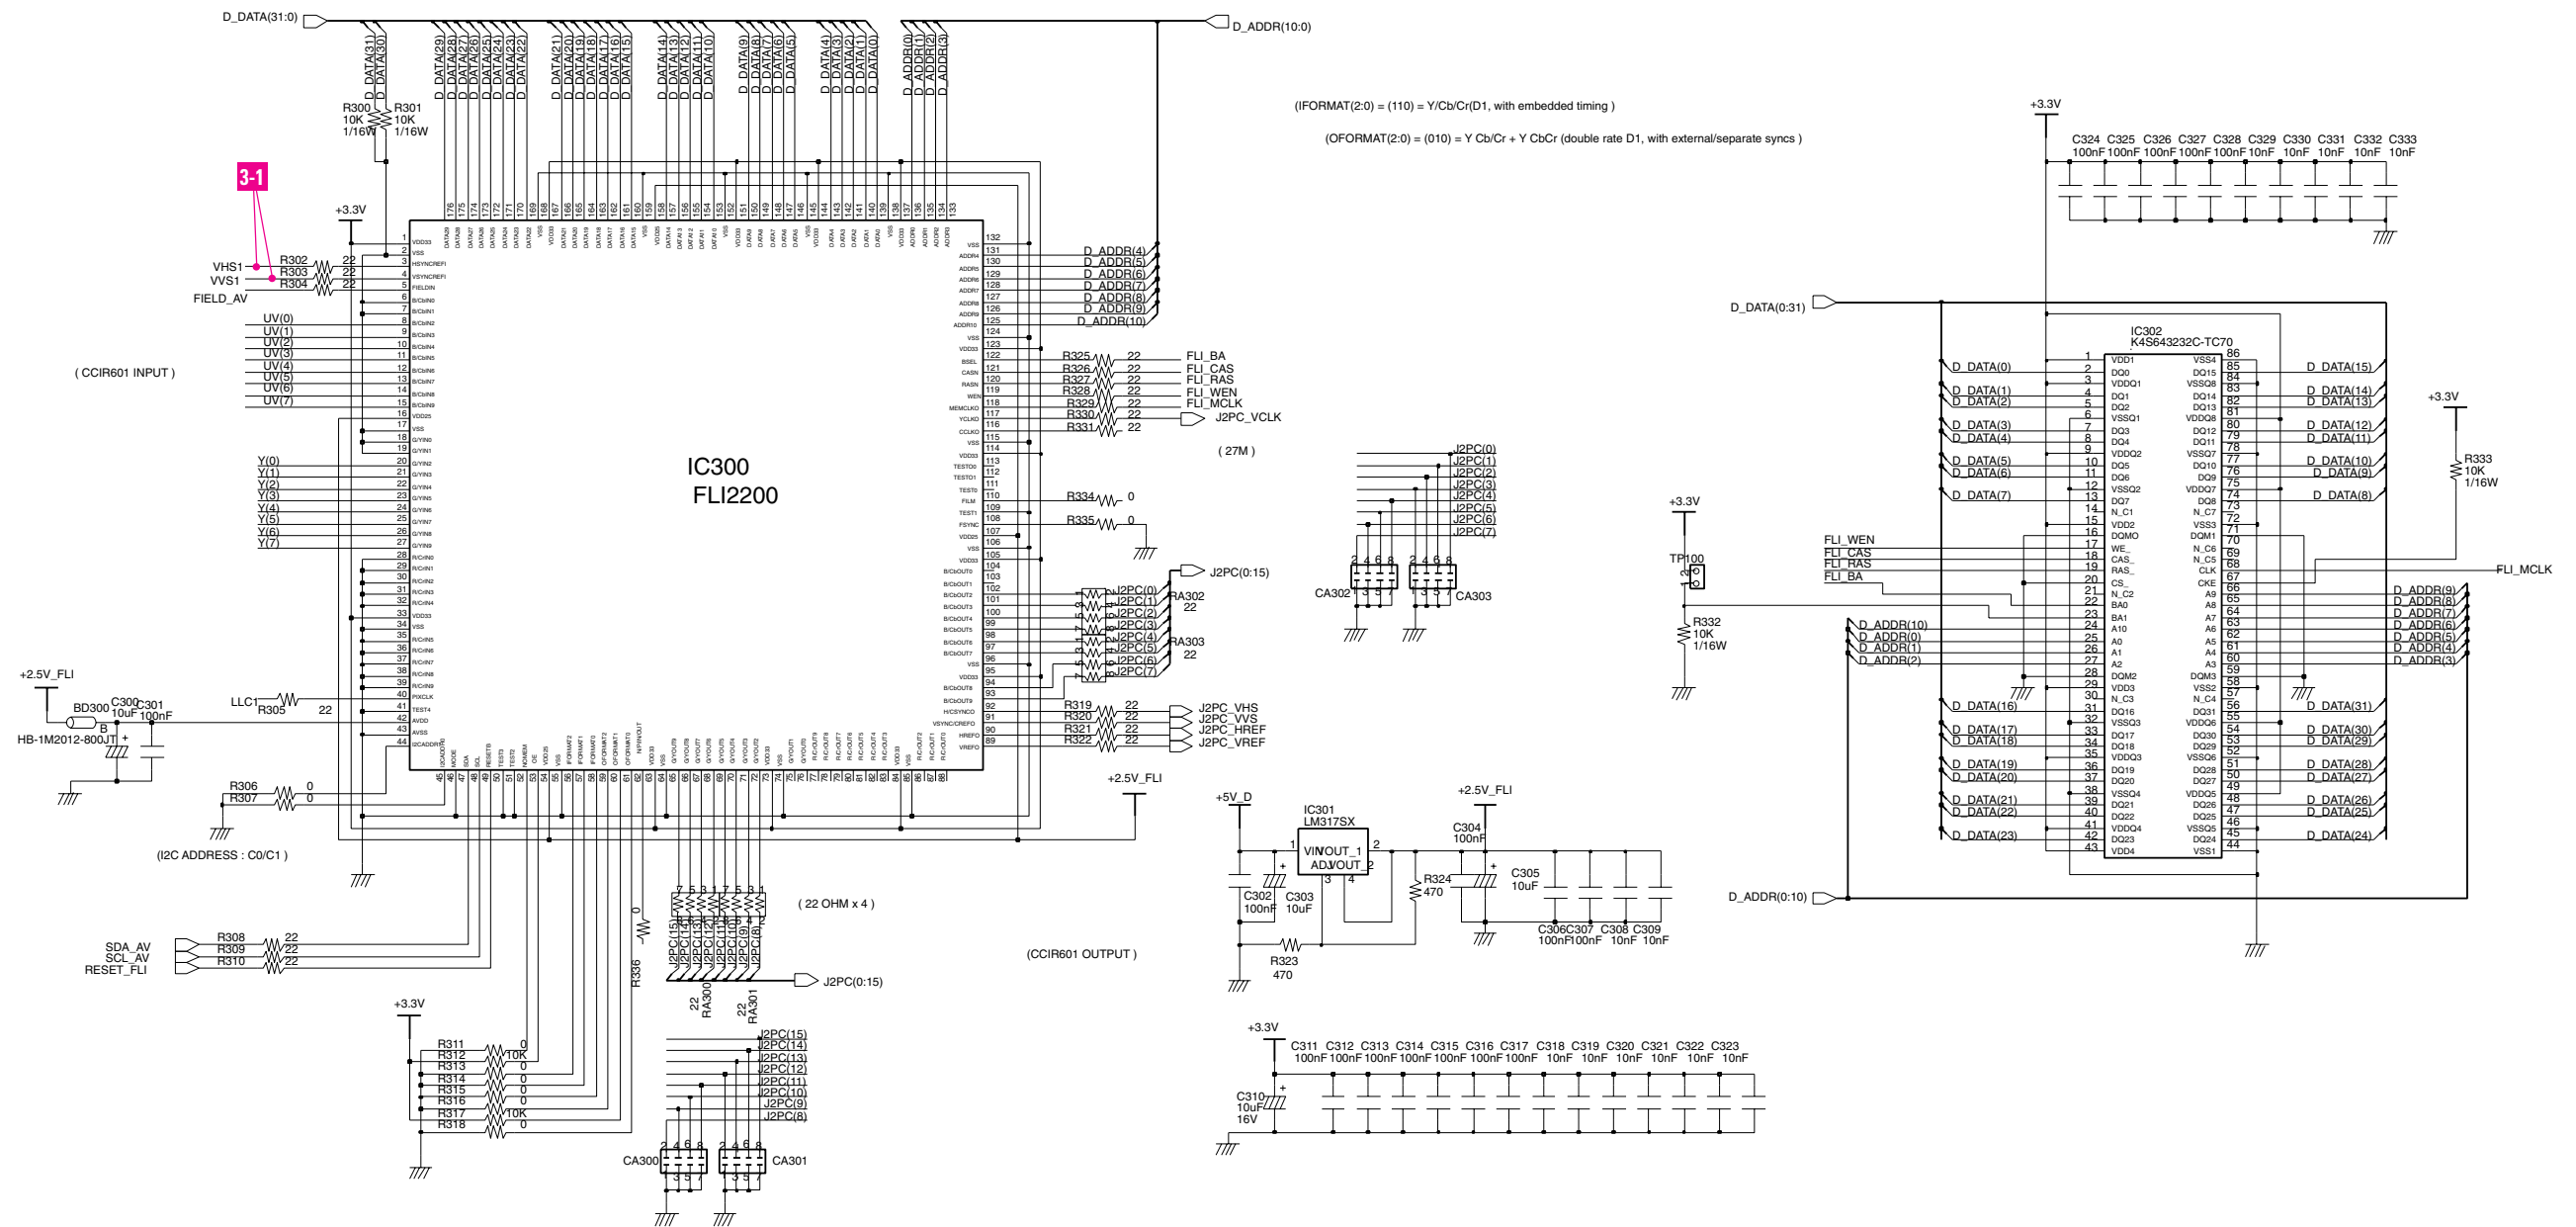


PLEASE START WITH THIS LOCATION
WHEN YOU HAVE A CHANCE TO CORRECT SCHEMATIC
AFTER CORRECTING IT !!!!!!!
THEN , PLEASE UPDATE LOCATION NUMBER

R337		
C334		
BD301		
CA304		
RA304		
IC303		


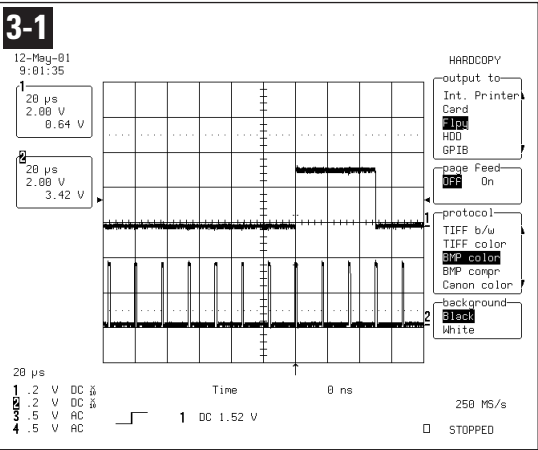


10-4 JAG-2 Part Schematic Diagram

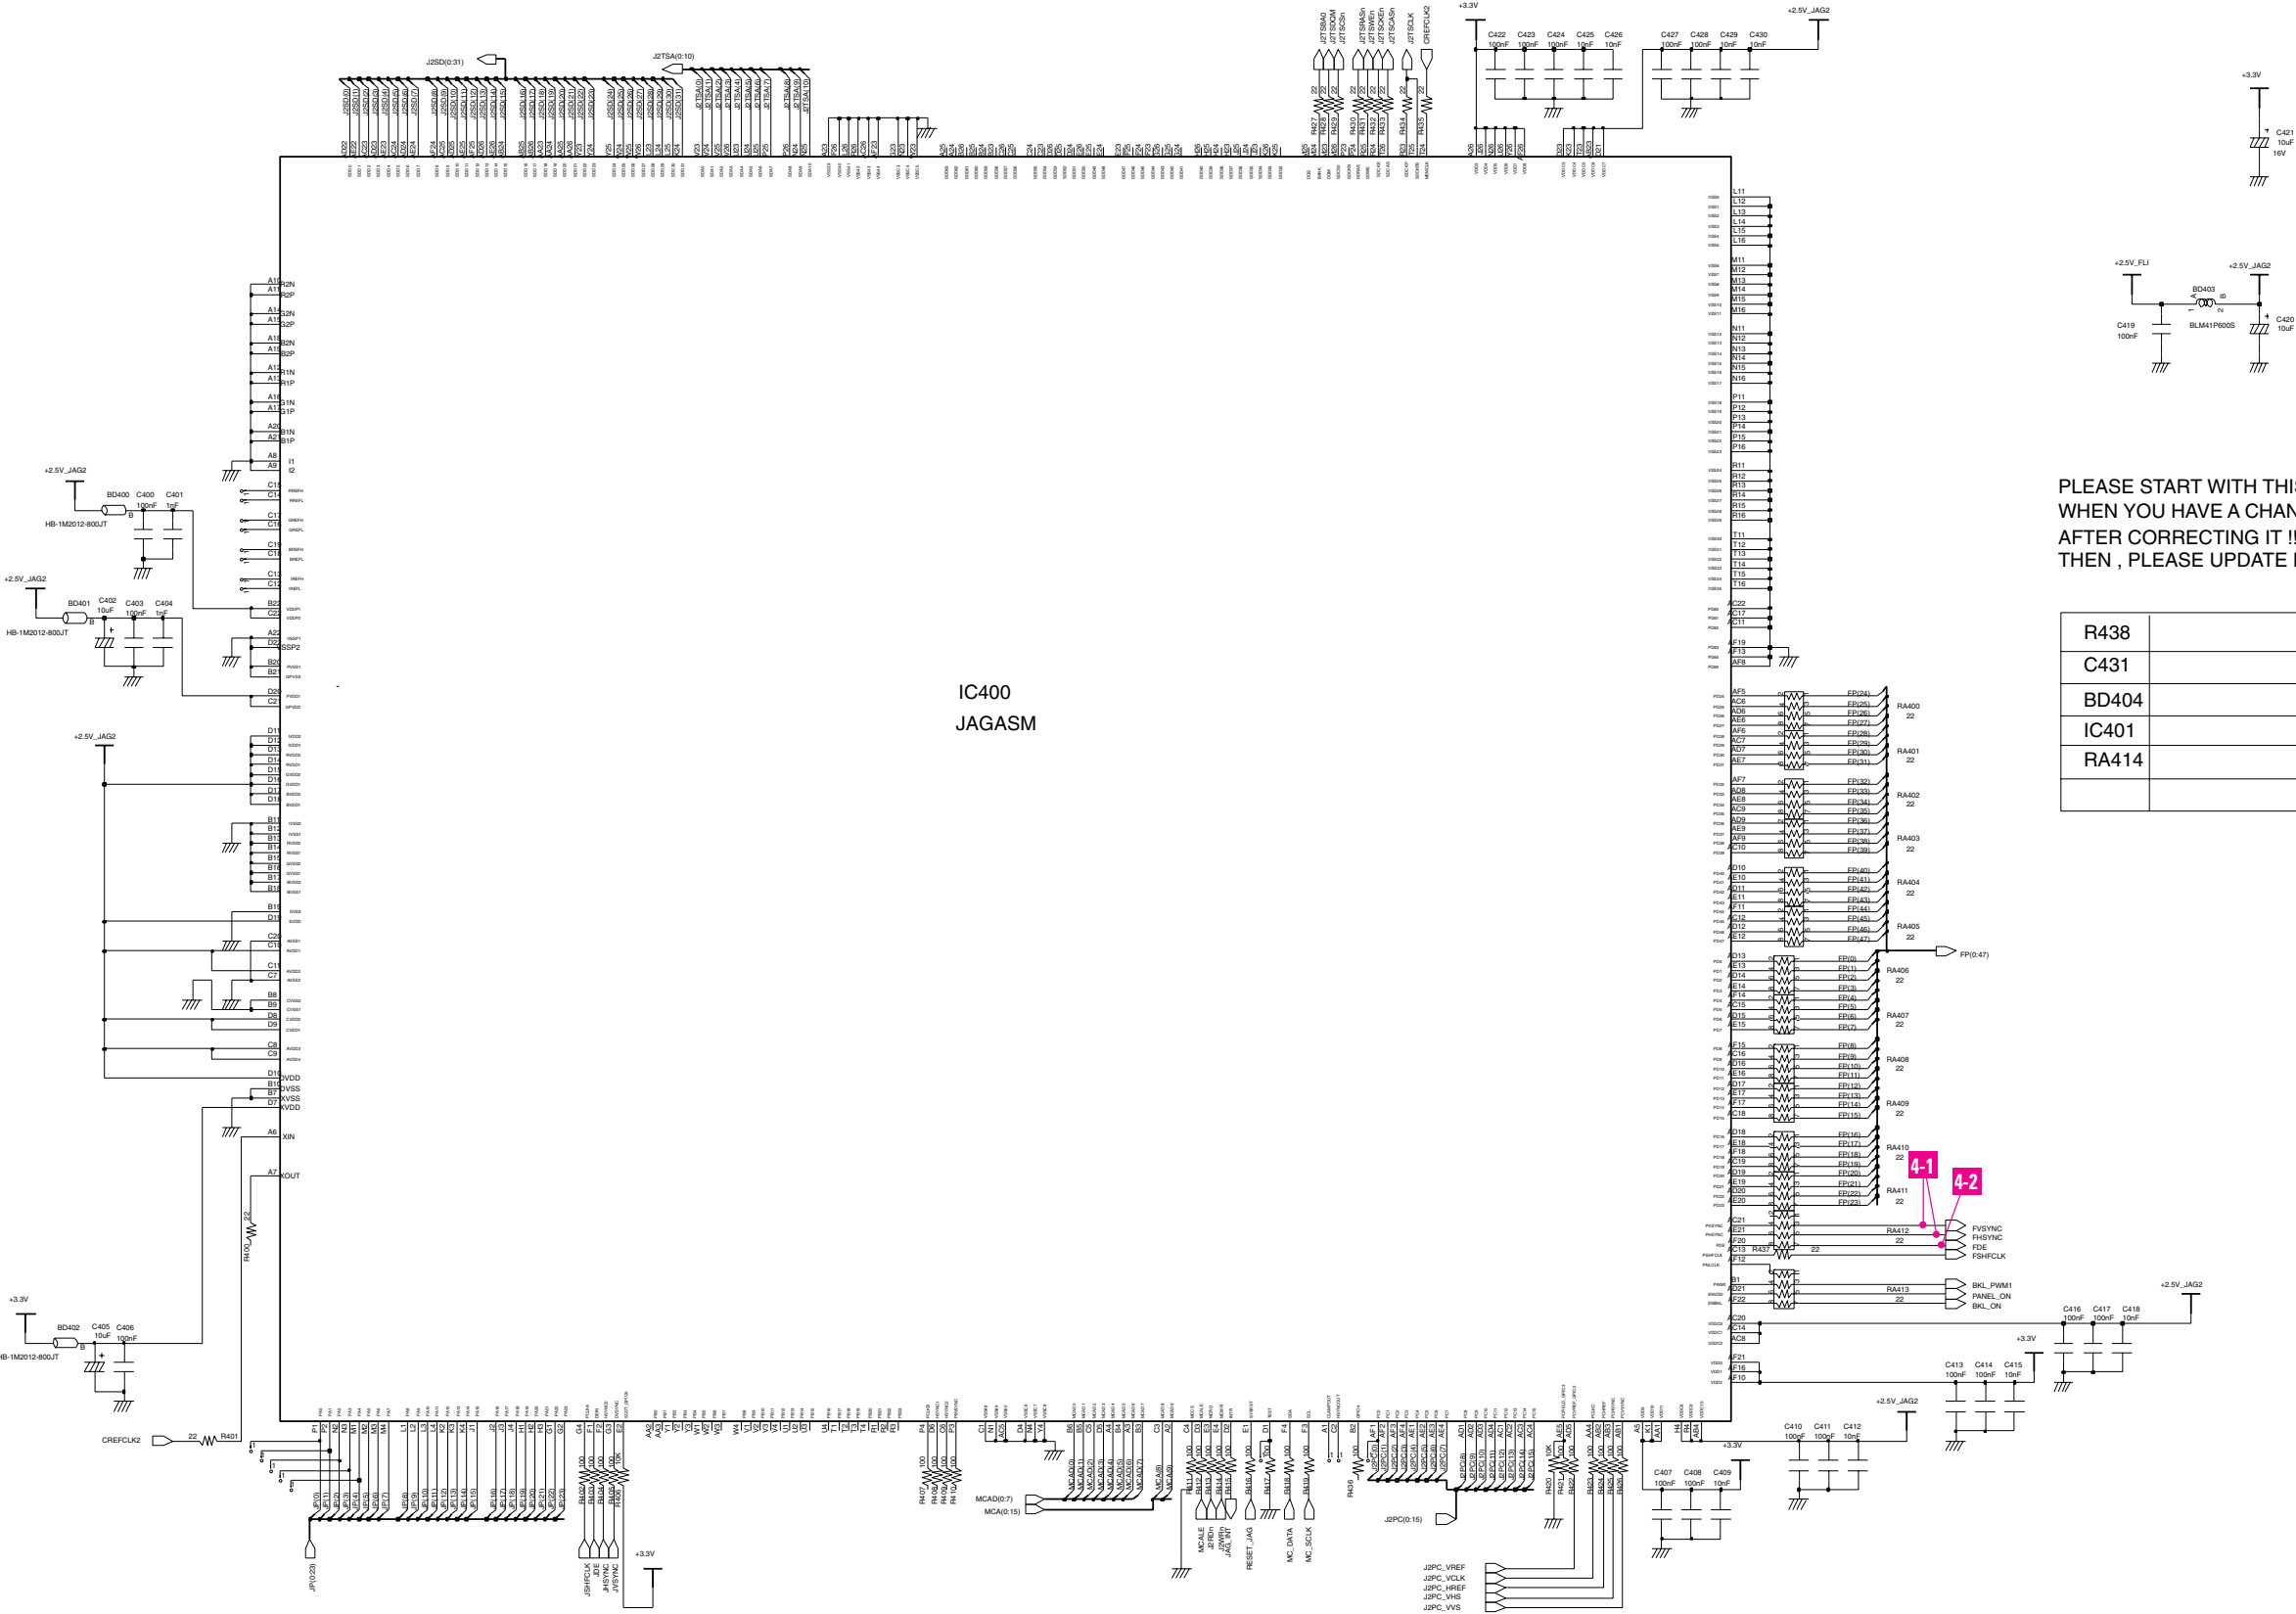


PLEASE START WITH THIS LOCATION
WHEN YOU HAVE A CHANCE TO CORRECT SCHEMATIC
AFTER CORRECTING IT !!!!!!
THEN , PLEASE UPDATE LOCATION NUMBER

R438		
C431		
BD404		
IC401		
RA414		

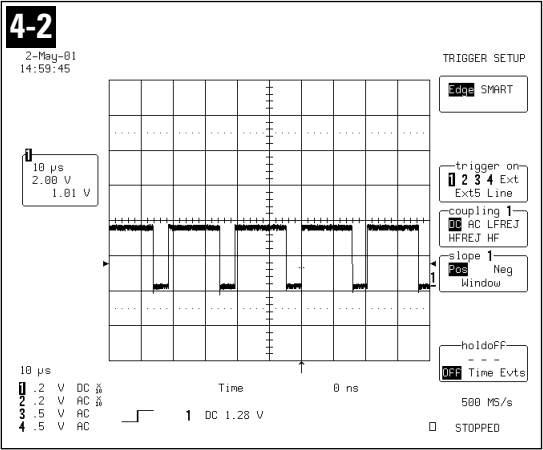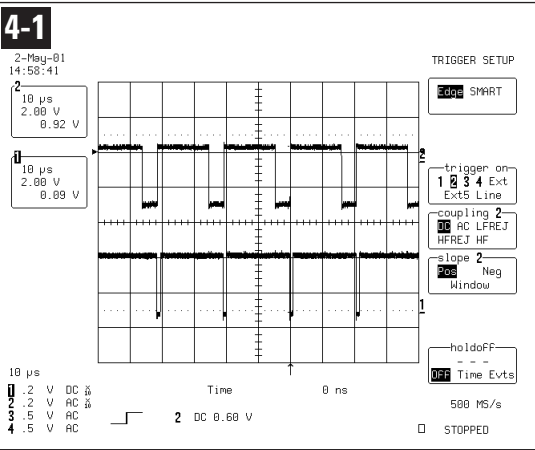


10-5 Sdram for JAGS Part Schematic Diagram

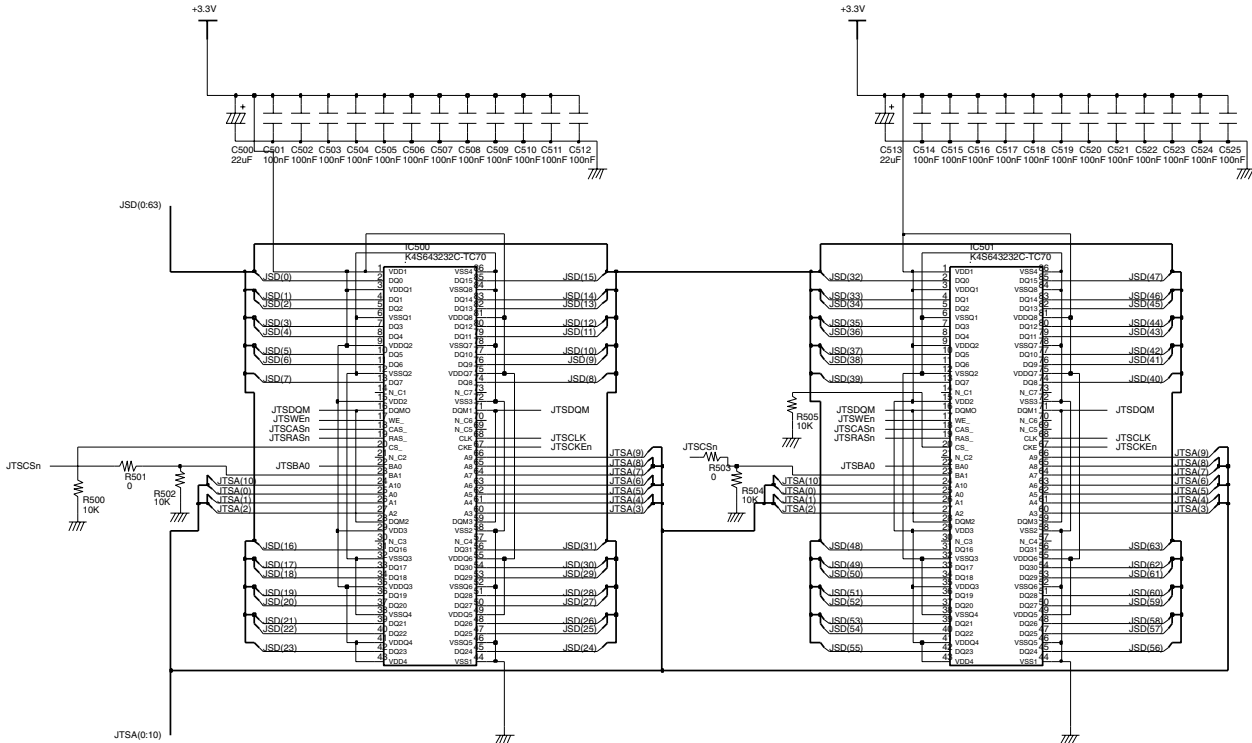



PLEASE START WITH THIS LOCATION
WHEN YOU HAVE A CHANCE TO CORRECT SCHEMATIC
AFTER CORRECTING IT !!!!!!!
THEN , PLEASE UPDATE LOCATION NUMBER

R509		
C539		
IC503		

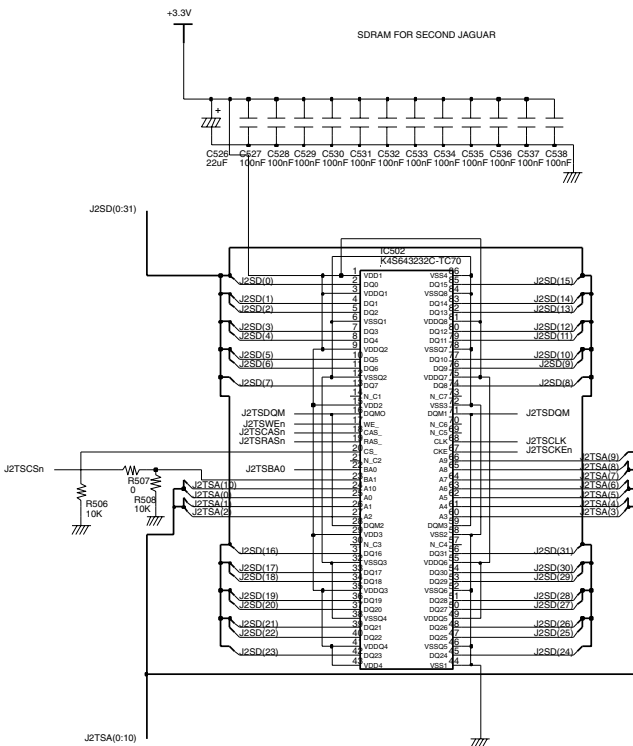






10-6 LVDS Part Schematic Diagram

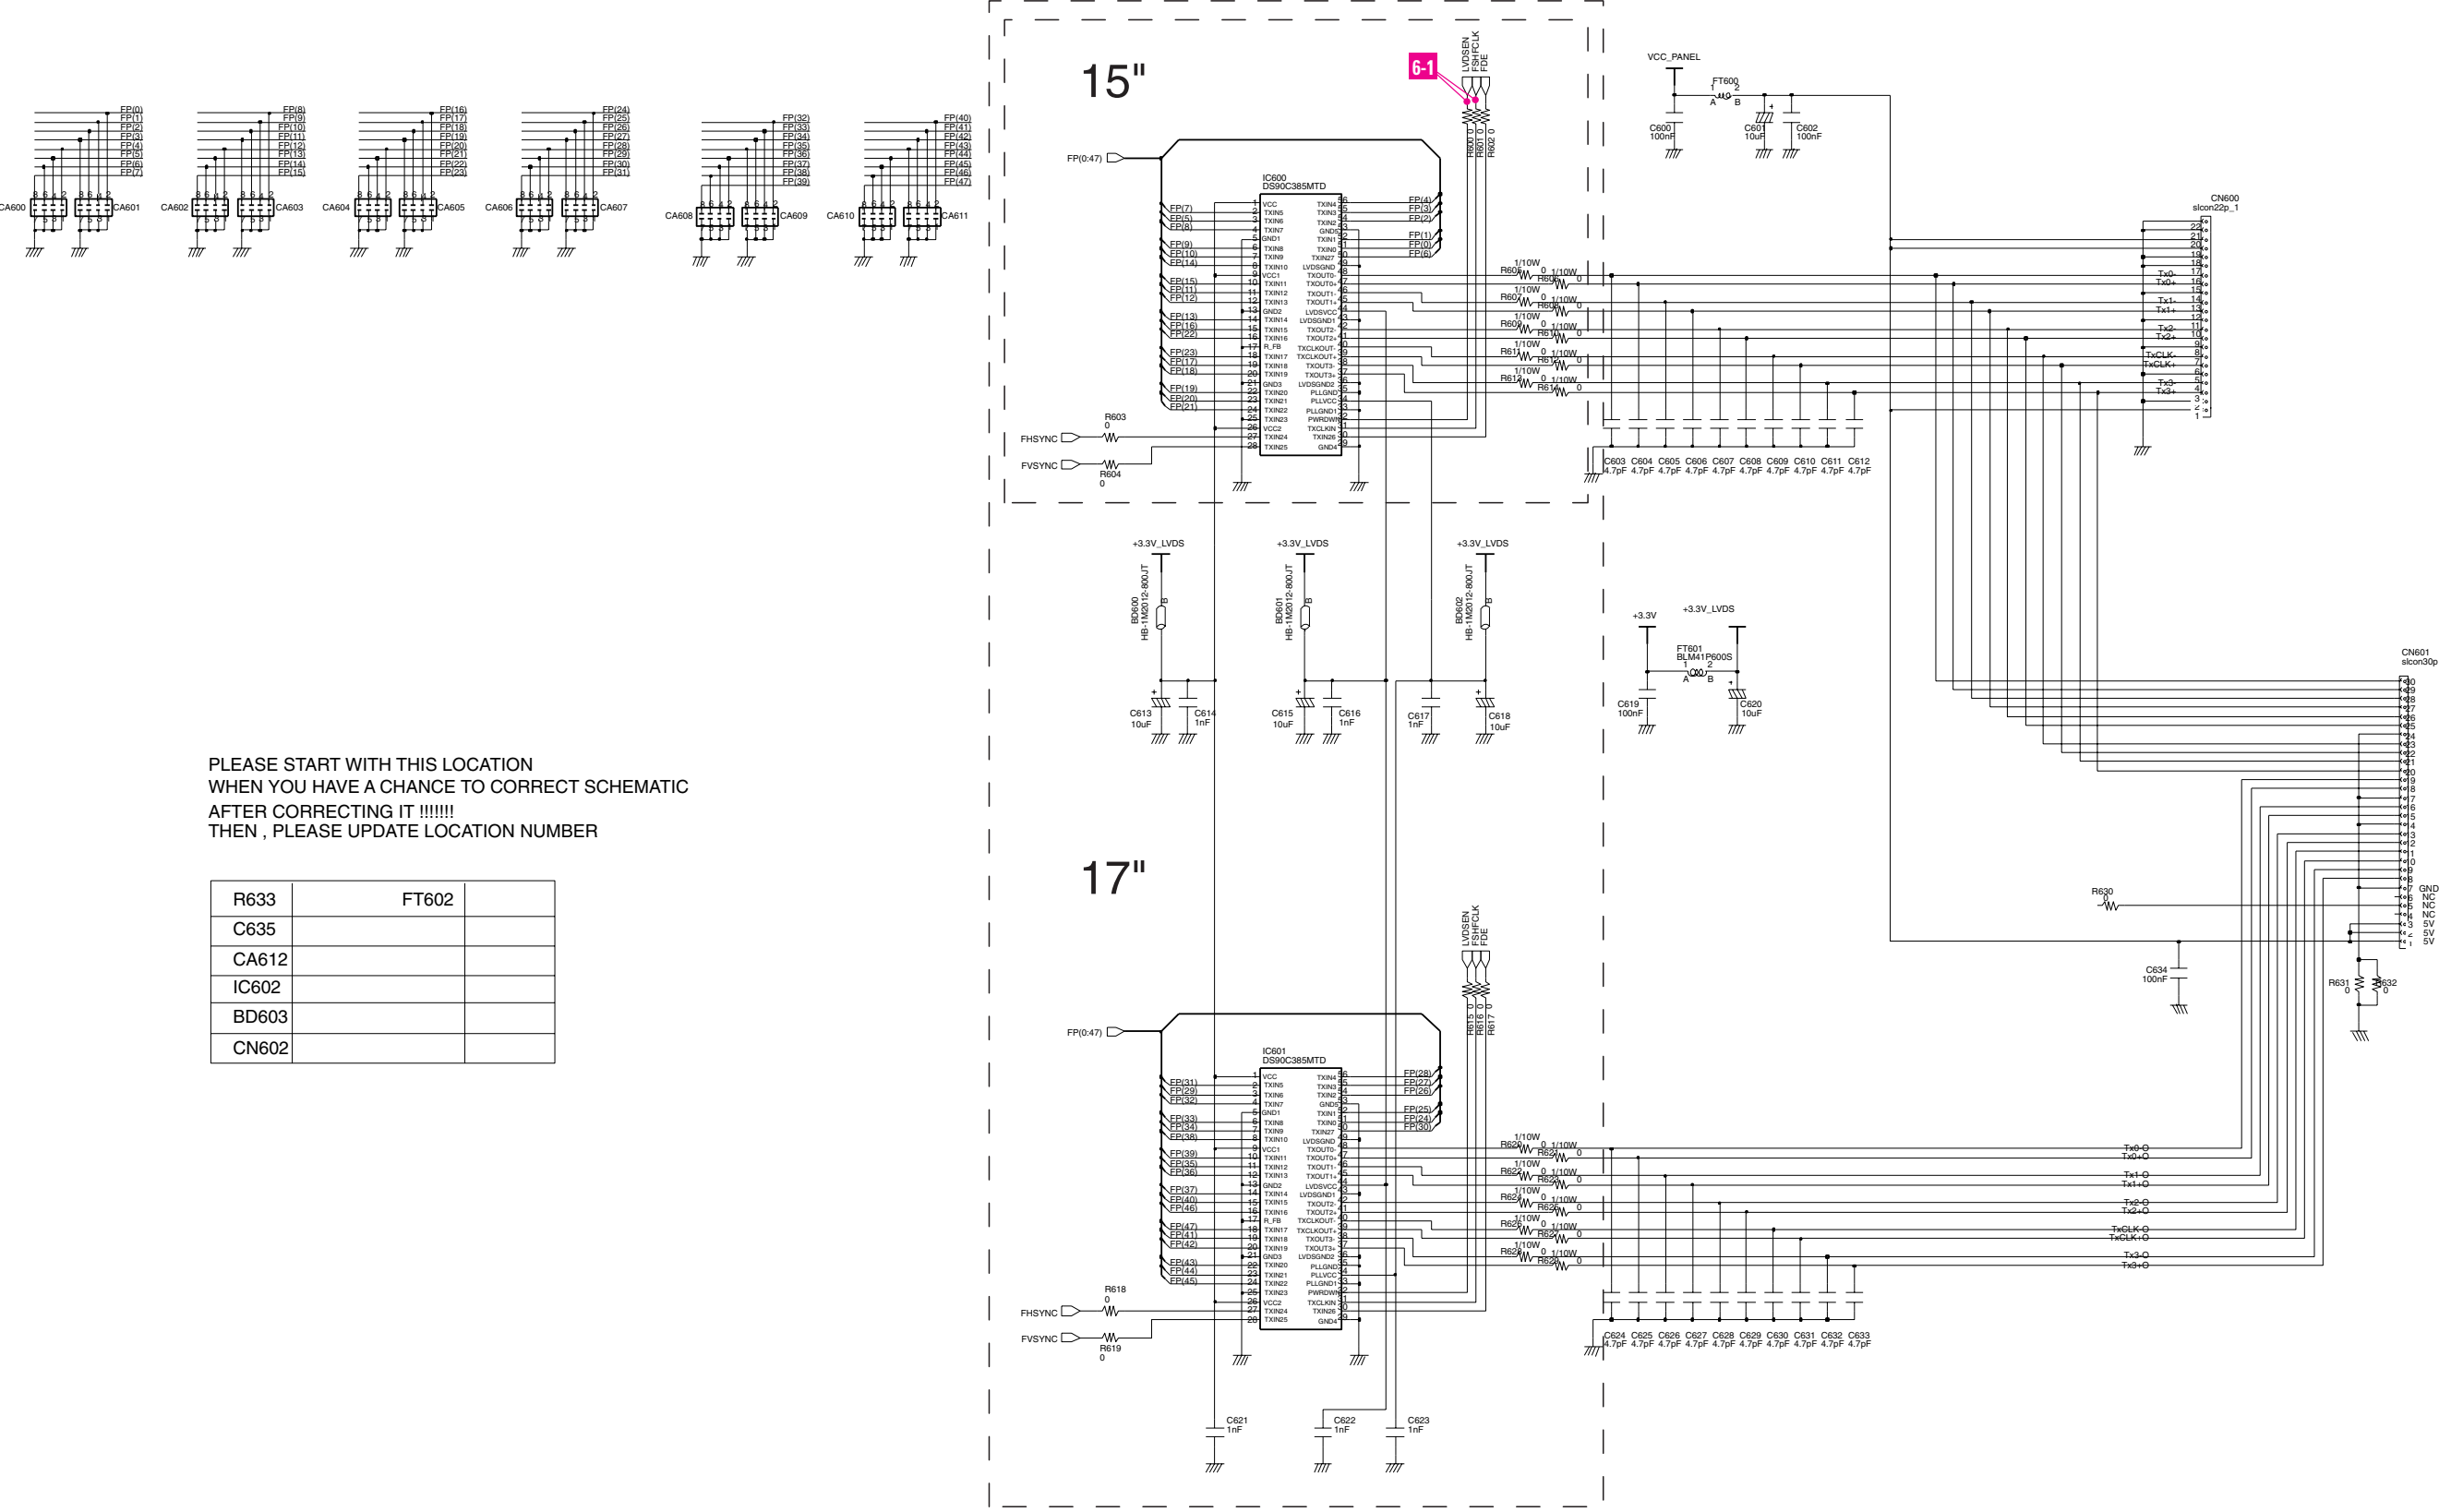


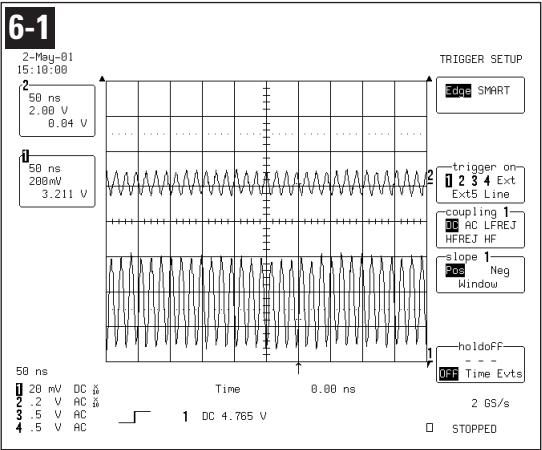


10-7 Audio Part Schematic Diagram

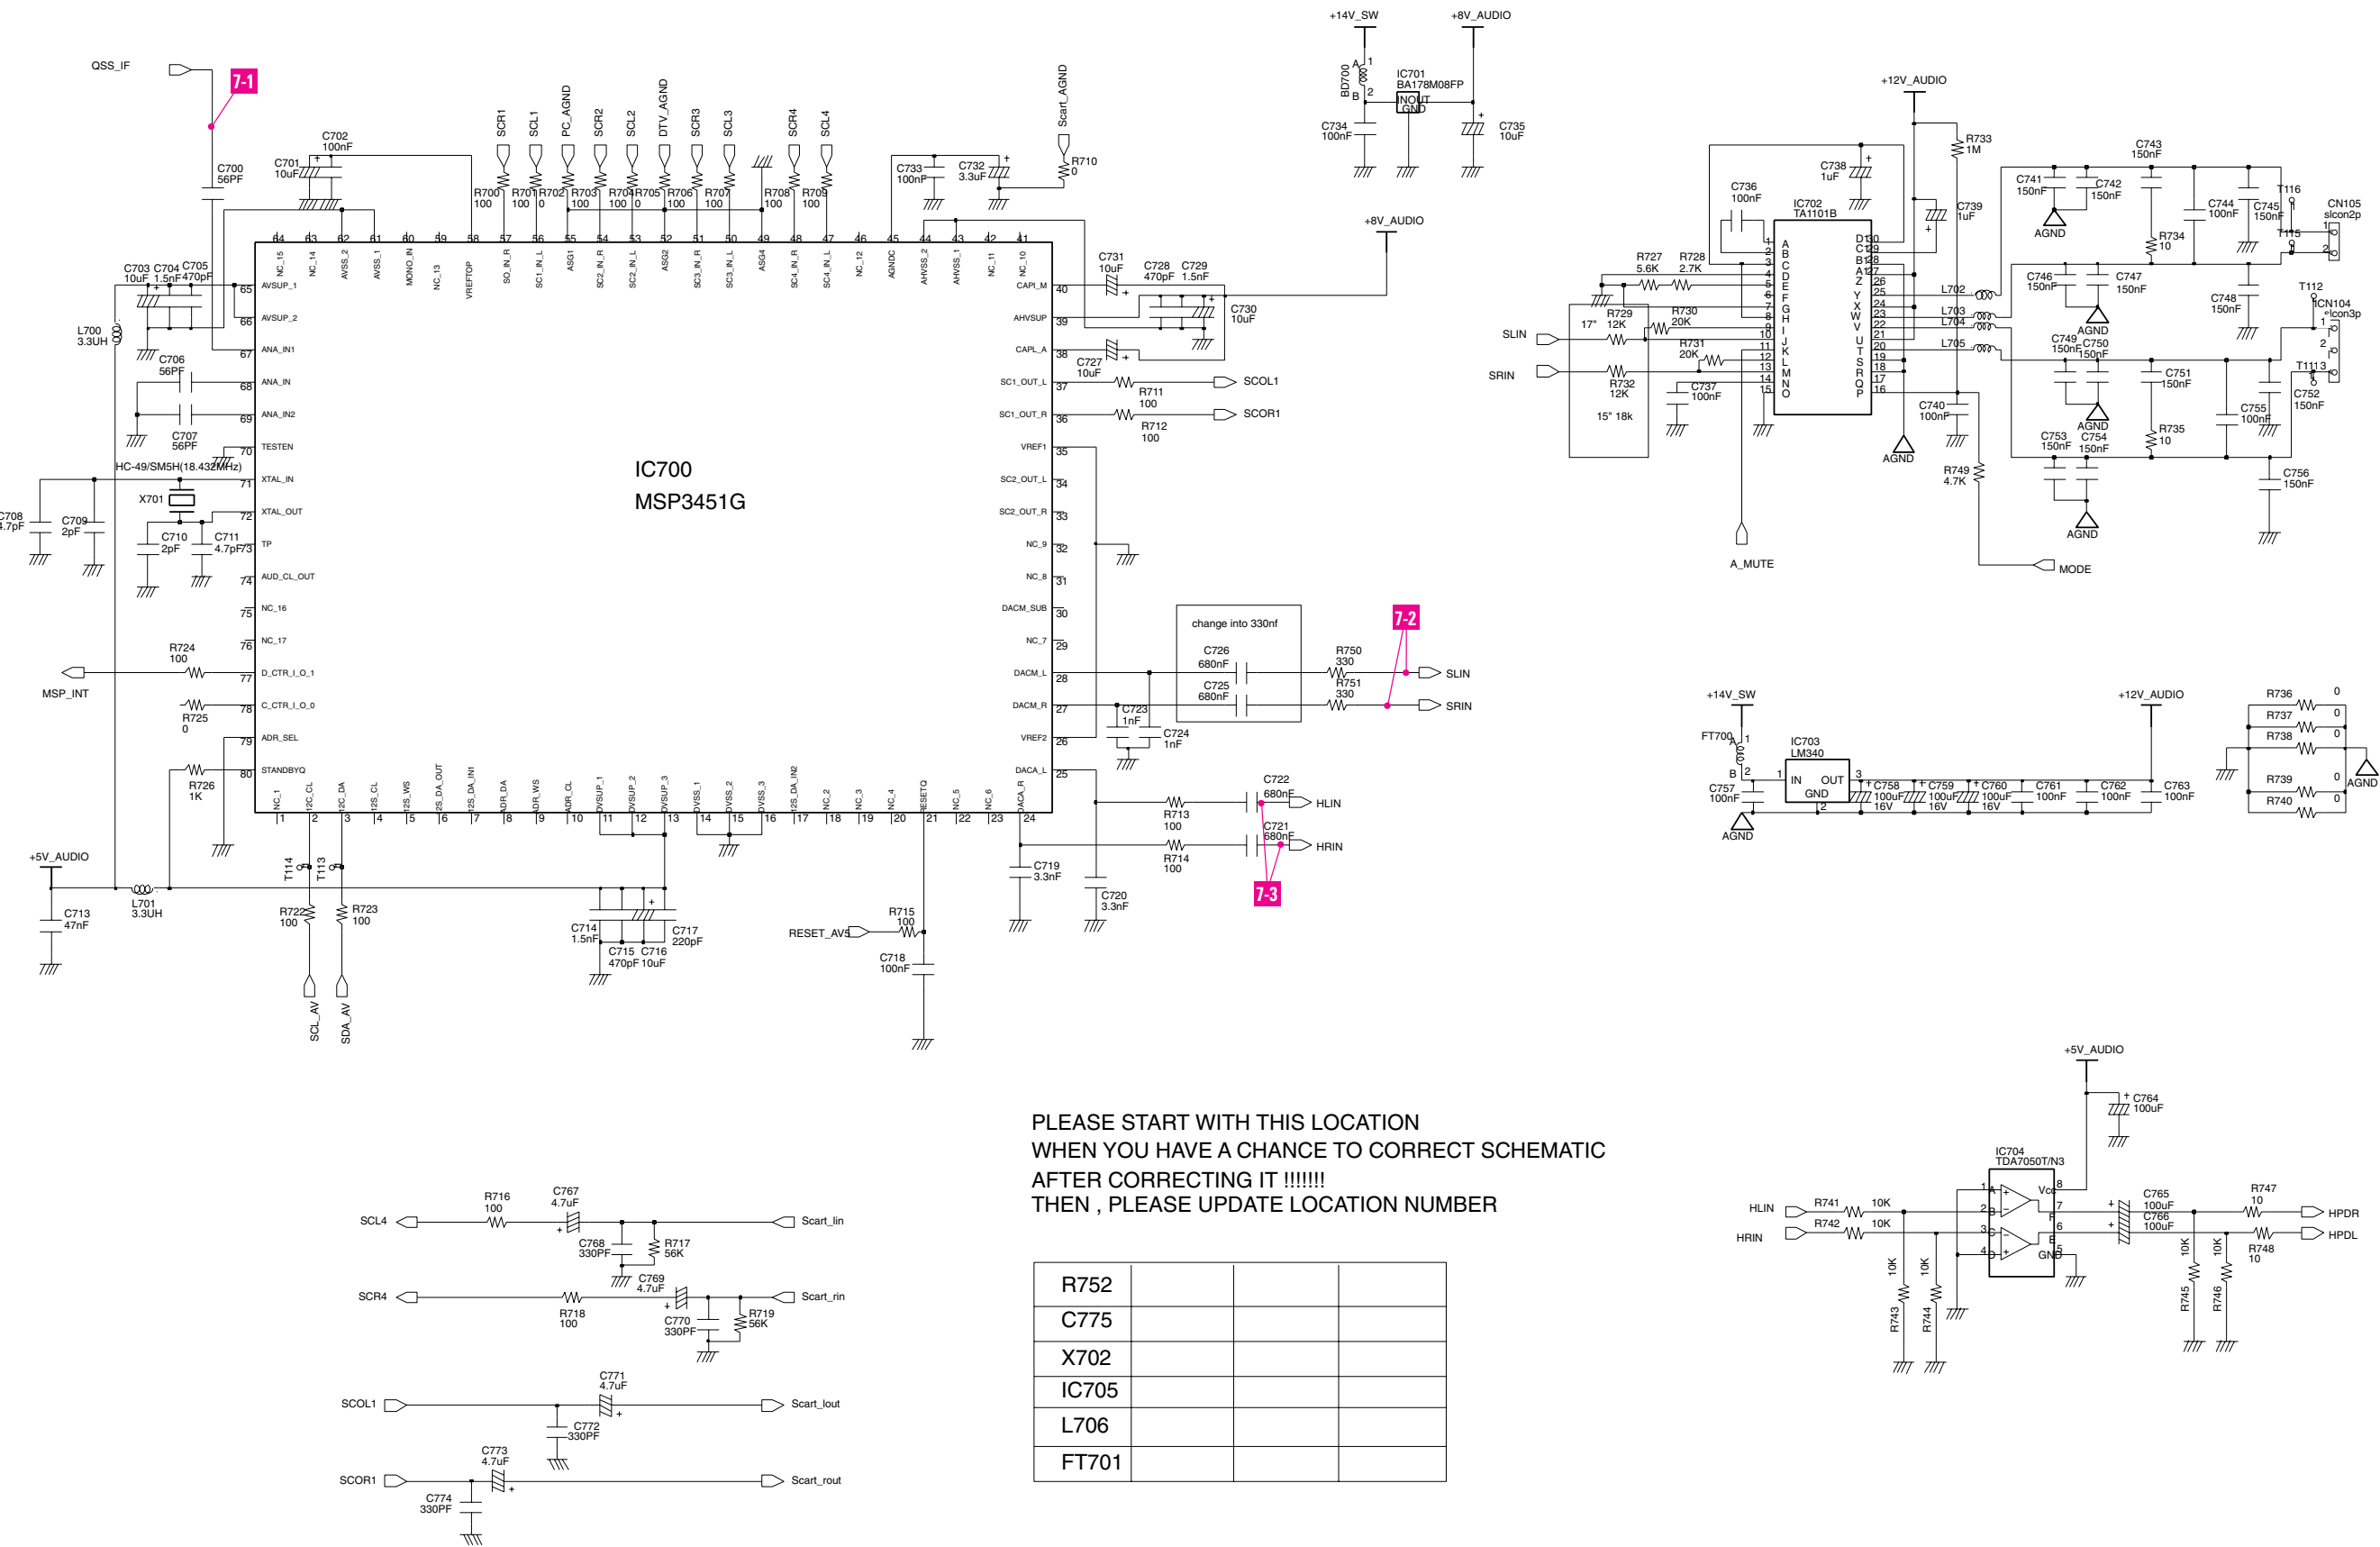

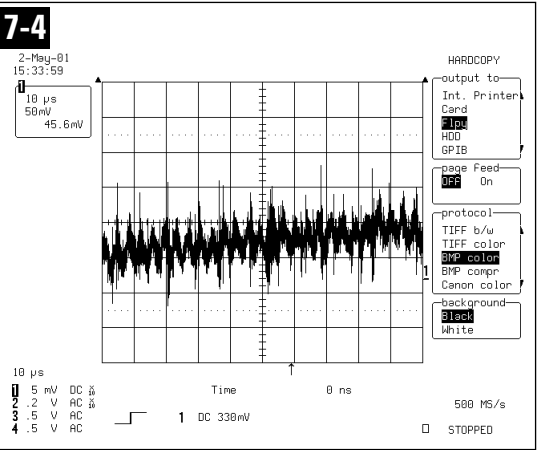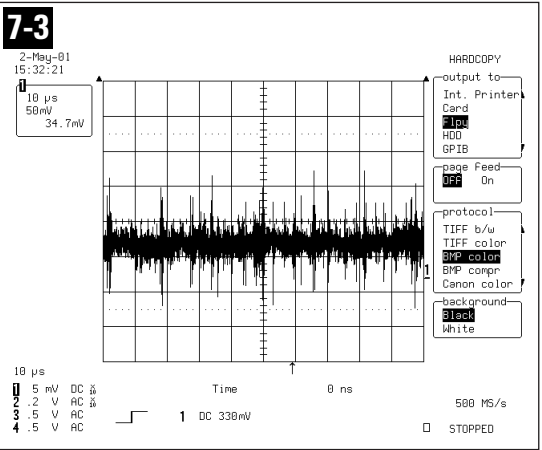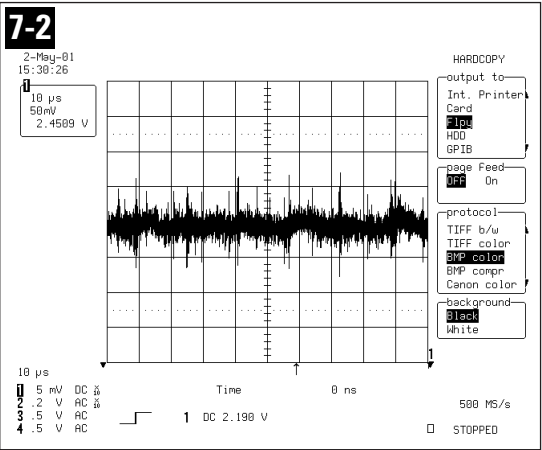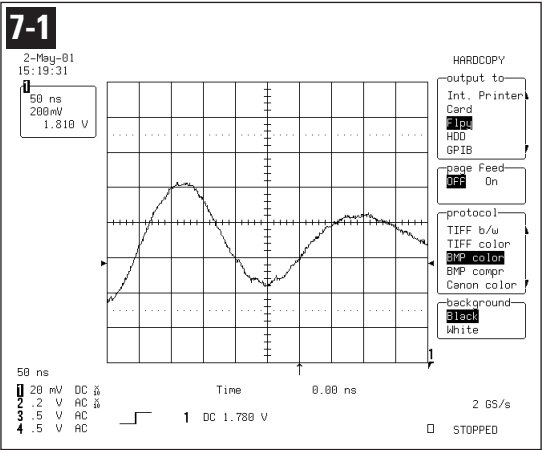



10-9 Microcontroller Part Schematic Diagram

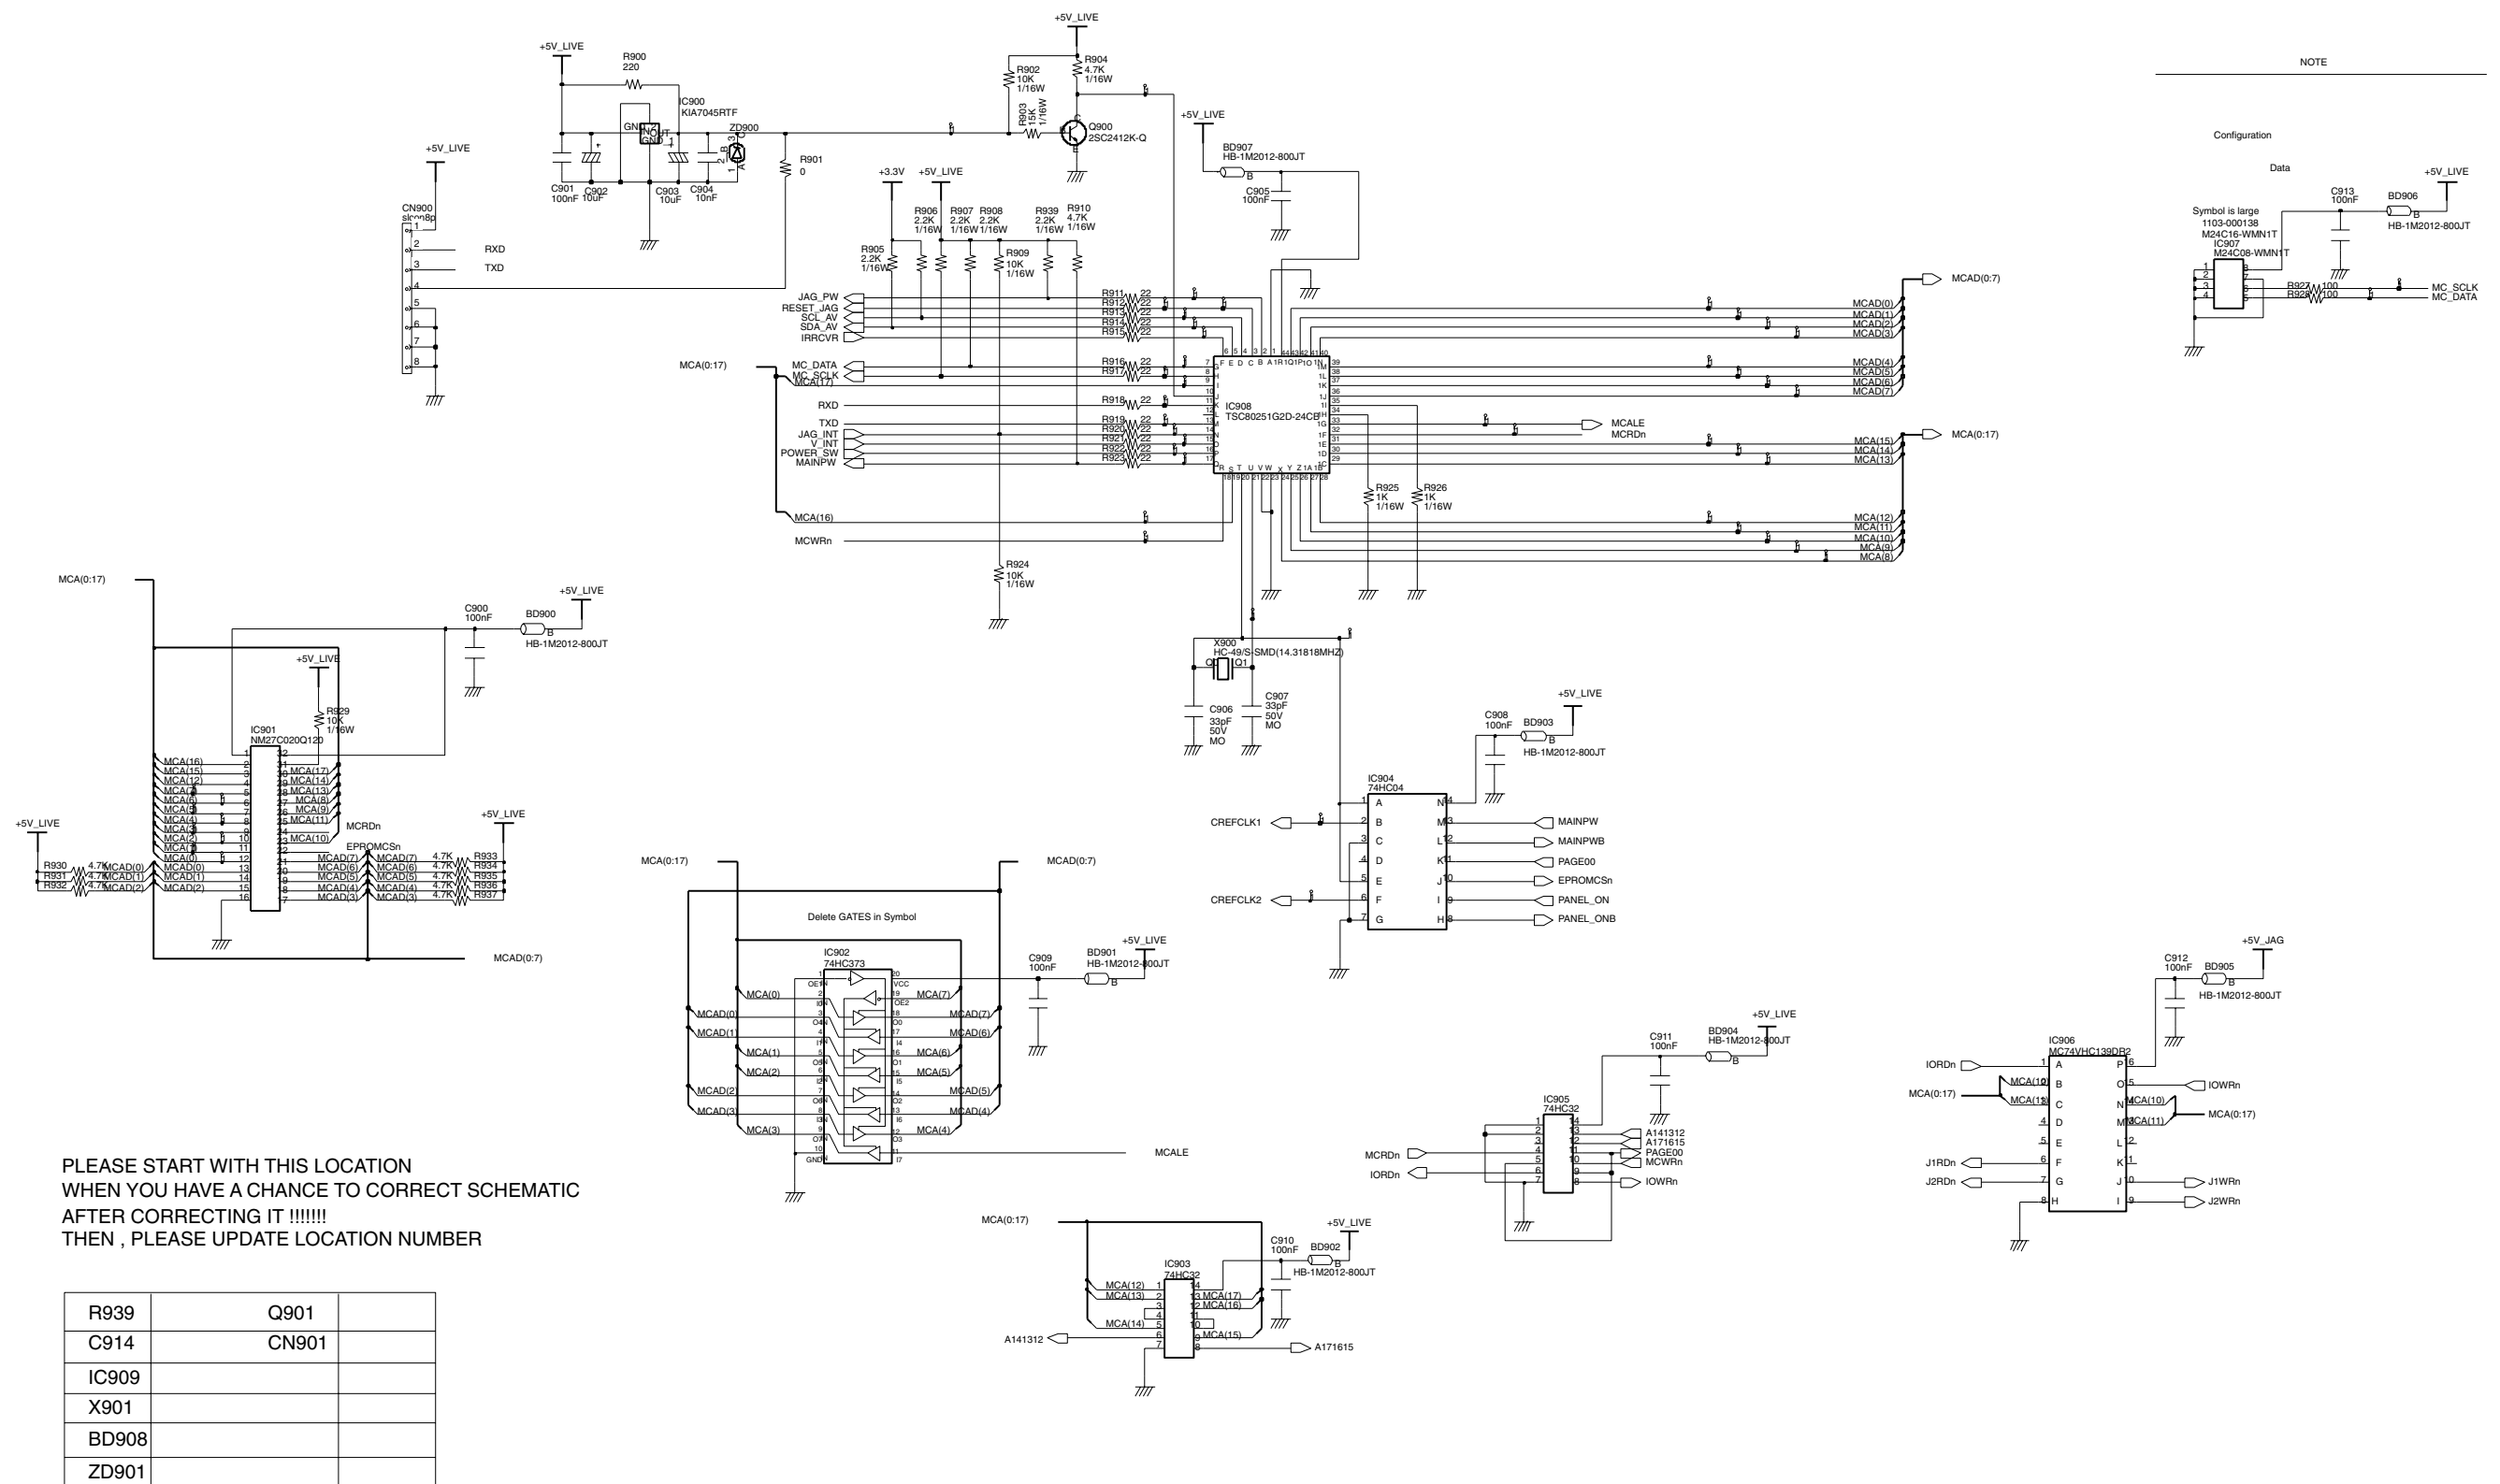

Memo



Samsung Electronics Co.,Ltd.

416, Maetan-3Dong, Paldal-Gu, Suwon City, Kyungki-Do, Korea.

Printed in Korea

P/N : BN68-00232A-00

<http://www.samsungmonitor.com> (SyncMaster Worldwide)

<http://www.samsung-monitor.com> (SyncMaster USA)

<http://www.sec.co.kr/monitor> (Korea)